

ACI — Accelerator Control Interface for Particle Therapy Systems



Features

- Interfaces to most particle therapy accelerator types
- Allows accelerator to connect to up to three treatment rooms plus “room 0”
- Suitable for “step and shoot” and continuous scanning beam delivery
- Communications to treatment room dose control systems via fiber optic channels
- Communication to dose control and room servers via Ethernet
- High level of electrical isolation on all signal and communication paths
- Options for current or voltage levels on analog signals
- Beam stop control and monitoring
- Beam enable signal can be routed via an interlock unit to provide a fast beam off method
- Compatible with Pyramid ICI Interlock Control Interface
- Display showing key configuration and diagnostic information
- Web-browser interface for remote monitoring

Applications

- Connecting Pyramid treatment nozzle systems to beam production accelerator systems.
- Generic particle therapy accelerator interfacing.
- In combination with Pyramid ICI to provide a beam control and interlocking system.



Connections to accelerator and beamline control

Current Command out	Analog beam current command. Configurable as either 0 to +10 VDC or 0 to 20 mA current (drives between 22-500 ohms of output impedance).
Enable Out	Digital fiber optic signal to turn beam on and off for dosimetry control. Note: an internal switch setting allows this signal to only pass to the fiber optic transmitter if the Beam Ready input is present. Note: the signal is routed via the Beam Control connectors. It can therefore be interrupted by an external device (Pyramid ICI or equivalent) as part of an interlock response.
Beam Ready input	Digital fiber optic signal indicating that accelerator system is ready to deliver beam. Note: an internal switch setting allows this signal to be used to gate the Enable Out signal.
Beam Enabled input	Digital fiber optic signal indicating that accelerator system is enabled to deliver beam (beam should be present).
Reserved In	Digital fiber optic signal reserved for future use.
Monitor Input Q	Analog input 0 to +10 V indicating how much charge remains in a synchro-
Monitor Input I	Analog input 0 to +10 V indicating the signal from a measurement by the accelerator of its beam current level.
Room Select Set	Two bit digital control pattern to set active treatment room in ACI. Bidirectional opto-coupled inputs, 5 to 24 V into 10k series resistance. Note: an internal switch allows this selection to be made instead by an Ethernet message.
Room Select Readout	Two bit digital readout pattern (two relay isolated contact pairs) to allow a remote system to validate the ACI room selection.

Connections to treatment rooms

Enable Room 0,1,2,3	Digital fiber optic inputs requesting beam from rooms 0,1,2,3. Only the input from a selected room is routed to the accelerator by the ACI.
Transmit / Receive Room 0,1,2,3	Digital fiber optic 10 Mb/s communication channel between M40 I/O devices in the ACI to loop controllers in each treatment room. Control signals to the ACI are: Beam current command and room beam stop in/out. Only the beam current command input from the selected room is routed to the accelerator by the ACI. Only the beam stop "open" command from the selected room 1,2 or 3 is routed to the appropriate beam stop connector by the ACI. The "open" command for room 0 is always routed through, irrespective of the room selection condition. Signals monitored by ACI and sent via the communication channel are: Beam current readback, compliance voltage of the beam current command (fault detection), synchrotron charge remaining, beamOK state, room beam stop in/out states, room selected flag, hard and soft interlock flag, beam enabled flag, beam energy frequency value.



Connections to beam stops

Beam Stop Control 0,1,2,3	Output switchable 24 VDC power to actuator solenoids 0,1,2,3. 24 VDC present should drive stop out of beam (fail safe arrangement). Outputs only enabled for a selected room and for room 0. Inputs for remote contact closures indicating beam stop fully in beam or fully out of beam.
---------------------------	---

Connections to interlock system

Beam Control Out to Beam Control In	Signals available for routing via an external interlock device where they can be interrupted as required by an interlock condition: Beam enable command digital The ACI delivers the room select bits to the external interlock device where they can be used to route room-centric (soft) interlock response. If no external interlock device is used, then the Out and In connectors should be linked instead by a 9-way pin to pin cable. The ACI detects if there is no connection between Out and In.
-------------------------------------	--

Connections to supervising computer

Ethernet	10/100/1000 BaseT TCP/IP Ethernet connection allows control and monitoring of some digital states. Control: Room select bits 0,1 (alternative to Room Select connector input) Reserved fiber optic output. Monitor: Beam Ready Beam Enabled Beam Enable inputs from rooms 0,1,2,3 Room selected readback bits 0,1 Beam energy frequency Reserved fiber optic input The ACI supports a web browser interface that allows these signals to be controlled and monitored remotely.
----------	---

Controls and switches

Front panel	Four fiber optic communication loop address selection switches for embedded M40 devices handling rooms 0,1,2,3.
Internal	SW2 Beam Enable is or is not gated by Beam Ready (Beam OK) SW3 Room select command bits by Room Select connector or Ethernet SW7 Charge remaining readback 0-20 mA or 0-10 V SW8 Beam current readback 0-20 mA or 0-10 V



Connections to embedded M40 devices

Connections used

Four connections for rooms N = 0,1,2,3

#	Signal	Function in ACI
1	Analog In 1	Monitor Inputs (I)
2	Analog In 2	Monitor Inputs (Q)
3	Digital In 1	Beam Enabled
4	Digital In 1	Beam Stop Readback In
5	Digital In 4	Beam Stop Readback In
6	Digital In 5	Beam Stop Readback Out
7	Digital In 6	Room is selected
8	Digital In 7	Soft Interlock set by external interlock device (ICI).
9	Digital In 8	Hard Interlock set by external interlock device (ICI).
10	Digital Out 1	Beam Stop Command



Service diagnostics

Serial debug port	<p>Six pin header serial connection to BBB card, rear panel. Mating connector TE Connectivity 926475-6</p> <table border="1" data-bbox="570 363 989 491"> <tr> <td>1</td> <td>DGnd</td> <td>4</td> <td>RX</td> </tr> <tr> <td>2</td> <td>n/c</td> <td>5</td> <td>TX</td> </tr> <tr> <td>3</td> <td>n/c</td> <td>6</td> <td>n/c</td> </tr> </table>	1	DGnd	4	RX	2	n/c	5	TX	3	n/c	6	n/c
1	DGnd	4	RX										
2	n/c	5	TX										
3	n/c	6	n/c										

USB	Internal USB port on BBB card or via serial-USB adaptor (DFR0065) on debug port.
-----	--

Displays

Alphanumeric display	2 x 16 character blue OLED on front panel for device status reporting.
----------------------	--

LEDs	<p>Four sets of four green LEDs showing status of M40 embedded I/O devices.</p> <table border="1" data-bbox="591 821 917 993"> <tr> <td>1</td> <td>Power on</td> </tr> <tr> <td>2</td> <td>Activity</td> </tr> <tr> <td>3</td> <td>Network</td> </tr> <tr> <td>4</td> <td>Device</td> </tr> </table> <p>In normal operation 1 and 4 should be illuminated.</p>	1	Power on	2	Activity	3	Network	4	Device
1	Power on								
2	Activity								
3	Network								
4	Device								

Power indicator	Illuminated Pyramid logo on front panel when +5 VDC internal voltage rail is present
-----------------	--

Processors and OS

ACI BeagleBone Card	TI Sitara AM335x (ARM Cortex A8) 1 GHz with dual PRU, QNX OS. Performs POST tests of relay function, RAM and flash, memory, battery function, Ethernet connection. ACI is disabled if POST fails.
---------------------	---

M40 devices	PIC 18LF8722, no OS.
-------------	----------------------



Operation	
-----------	--

Shutdown	
----------	--

Power

Input	24(+/- 2) VDC 1200 mA; fused 1100 mA nominal for main circuit and 200 mA for cooling fan with PTC fuses.
Output	Isolated +15 V and -15 V, 65 mA supplies available on rear panel connector for use with external isolation amplifiers as necessary.
Front panel connectors	Do not use. Embedded M40 devices are powered by internal connection.

Case

Format	19" rackmount 1U by 250 mm deep with rear panel cooling fan. See figures for dimensions.
Materials	Steel chassis with Al alloy front panel, polycarbonate decals.
Protection rating	IP43 (protected against solid objects greater than 1mm in size, protected against spraying water)
Weight	3.5 kg (7.7 lb)

Environment

Operating	10 to 35 C (15 to 25 C recommended), < 70% humidity, non-condensing, shock and short term vibration < 0.2g all axes (1 to 100 Hz). Recommended location is outside radiation area. May be located in a moderate radiation area together with similar electronics, clear of known or expected radiation hot spots. Monitor operation during commissioning and relocate if necessary.
Shipping and storage	-10 to 50 C, < 80% humidity, non-condensing, shock and short term vibration < 1g all axes, 1 to 100 Hz.



Connectors

Fiber optic digital logic inputs	Eight receivers, HFBR 2515 ST bayonet connector (dark gray), rear panel, for multimode HCS fiber, 640 nm visible light.
Fiber optic digital logic outputs	Two transmitters, HFBR 1515 ST bayonet connector (light gray), rear panel, for multimode HCS fiber, 640 nm visible light.
Fiber optic communication channels	Four HFBR receiver/transmitter pairs, front panel, ST bayonet connectors for 10 Mb/s communications to Pyramid loop controllers. Multimode HCS fiber, 640 nm visible light.
Current Command	Two BNC connectors, rear panel, for 0-20 mA and 0-10 V outputs.

Beam control signals outgoing (bottom: to ICI)	<p>DSub 9 pin female, rear panel</p> <table border="1"> <tr> <td>1</td> <td>Beam enable out</td> <td>6</td> <td>n/c</td> </tr> <tr> <td>2</td> <td>Connected sense</td> <td>7</td> <td>24 VDC fused</td> </tr> <tr> <td>3</td> <td>24 VDC fused</td> <td>8</td> <td>DGnd</td> </tr> <tr> <td>4</td> <td>Room select bit 0 out</td> <td>9</td> <td>DGnd</td> </tr> <tr> <td>5</td> <td>Room select bit 1 out</td> <td></td> <td></td> </tr> </table>	1	Beam enable out	6	n/c	2	Connected sense	7	24 VDC fused	3	24 VDC fused	8	DGnd	4	Room select bit 0 out	9	DGnd	5	Room select bit 1 out		
1	Beam enable out	6	n/c																		
2	Connected sense	7	24 VDC fused																		
3	24 VDC fused	8	DGnd																		
4	Room select bit 0 out	9	DGnd																		
5	Room select bit 1 out																				

Beam control signals incoming (top: from ICI)	<p>DSub 9 pin male, rear panel</p> <table border="1"> <tr> <td>1</td> <td>Beam enable return</td> <td>6</td> <td>n/c</td> </tr> <tr> <td>2</td> <td>DGnd</td> <td>7</td> <td>Hard enabled</td> </tr> <tr> <td>3</td> <td>Soft enabled</td> <td>8</td> <td>n/c</td> </tr> <tr> <td>4</td> <td>Room select bit 0 return</td> <td>9</td> <td>DGnd</td> </tr> <tr> <td>5</td> <td>Room select bit 1 return</td> <td></td> <td></td> </tr> </table>	1	Beam enable return	6	n/c	2	DGnd	7	Hard enabled	3	Soft enabled	8	n/c	4	Room select bit 0 return	9	DGnd	5	Room select bit 1 return		
1	Beam enable return	6	n/c																		
2	DGnd	7	Hard enabled																		
3	Soft enabled	8	n/c																		
4	Room select bit 0 return	9	DGnd																		
5	Room select bit 1 return																				

Ethernet	RJ-45 jack, rear panel																
Monitor Input (Q)	BNC, rear panel, 0-20 mA or 0-10 V (internal switch selection)																
Monitor Input (I)	BNC, rear panel, 0-20 mA or 0-10 V (internal switch selection)																
Room Select	<p>Phoenix 1787030 locking 3.5 mm header 8 position, rear panel. Mating connector Phoenix 1790506 or Phoenix 1790315.</p> <table border="1"> <tr> <td>1</td> <td>Room selected bit 0 comm</td> <td>6</td> <td>Room select bit 0 opto in</td> </tr> <tr> <td>2</td> <td>Room selected bit 0 n/o</td> <td>7</td> <td>Room select bit 0 opto in</td> </tr> <tr> <td>3</td> <td>Room selected bit 1 comm</td> <td>8</td> <td>Room select bit 1 opto in</td> </tr> <tr> <td>4</td> <td>Room selected bit 1 n/o</td> <td>9</td> <td>Room select bit 1 opto in</td> </tr> </table> <p>(Opto inputs are bidirectional)</p>	1	Room selected bit 0 comm	6	Room select bit 0 opto in	2	Room selected bit 0 n/o	7	Room select bit 0 opto in	3	Room selected bit 1 comm	8	Room select bit 1 opto in	4	Room selected bit 1 n/o	9	Room select bit 1 opto in
1	Room selected bit 0 comm	6	Room select bit 0 opto in														
2	Room selected bit 0 n/o	7	Room select bit 0 opto in														
3	Room selected bit 1 comm	8	Room select bit 1 opto in														
4	Room selected bit 1 n/o	9	Room select bit 1 opto in														



Connectors (continued)

Beam Stop Control

Four DSub 9 pin male, rear panel for beam stops N = 0,1,2,3

1	Beamstop N switched 24 VDC	6	PSGnd (24 V ref)
2	Beam stop N in limit switch	7	PSGnd (24 V ref)
3	Beam stop N out limit switch	8	PSGnd (24 V ref)
4	n/c	9	n/c
5	n/c		

Remote limit switch should be n/o and close to connect relevant limit switch input to PSGnd to indicate limit is reached.

Power Input

Lemo Redel PXG.M0.2GG.NG. To suit mating connector PAG.M0.2GL type as fitted to Pyramid power supply PSU24-100M-1R.




1	+24 VDC in
2	24 V rtn

Ground lug

M4 threaded stud.



ACI front and rear panels

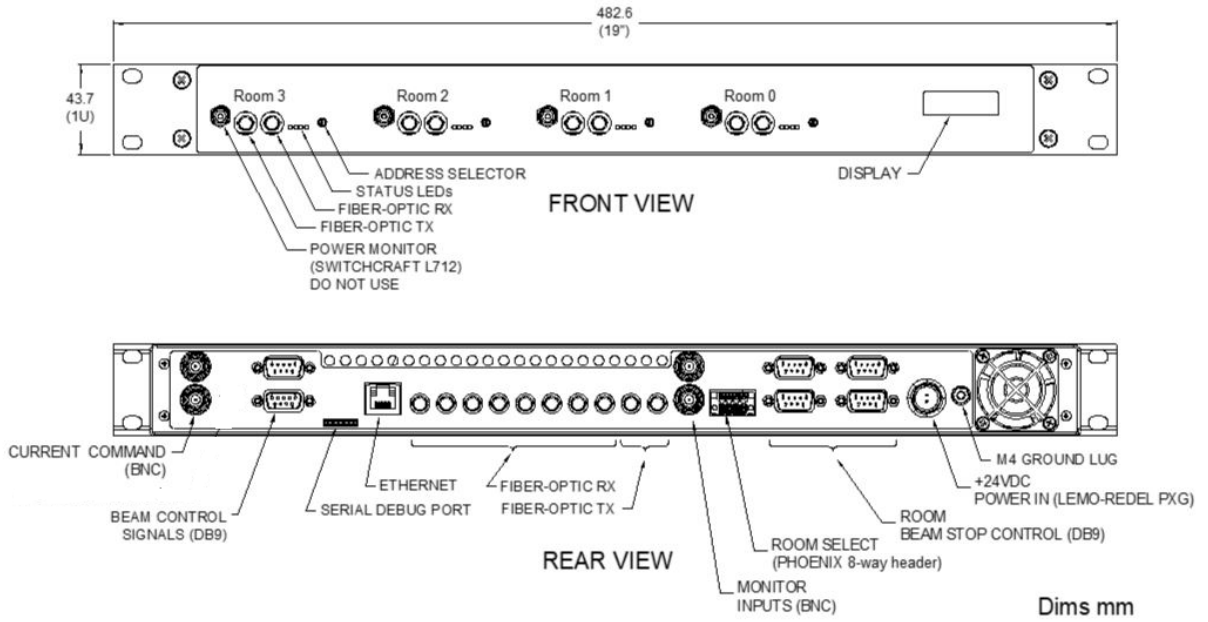


Ordering information

ACI-G	Accelerator Control Interface for particle therapy systems.
	Enquire about pre-configuration to suite a specific system.



ACI top and side view

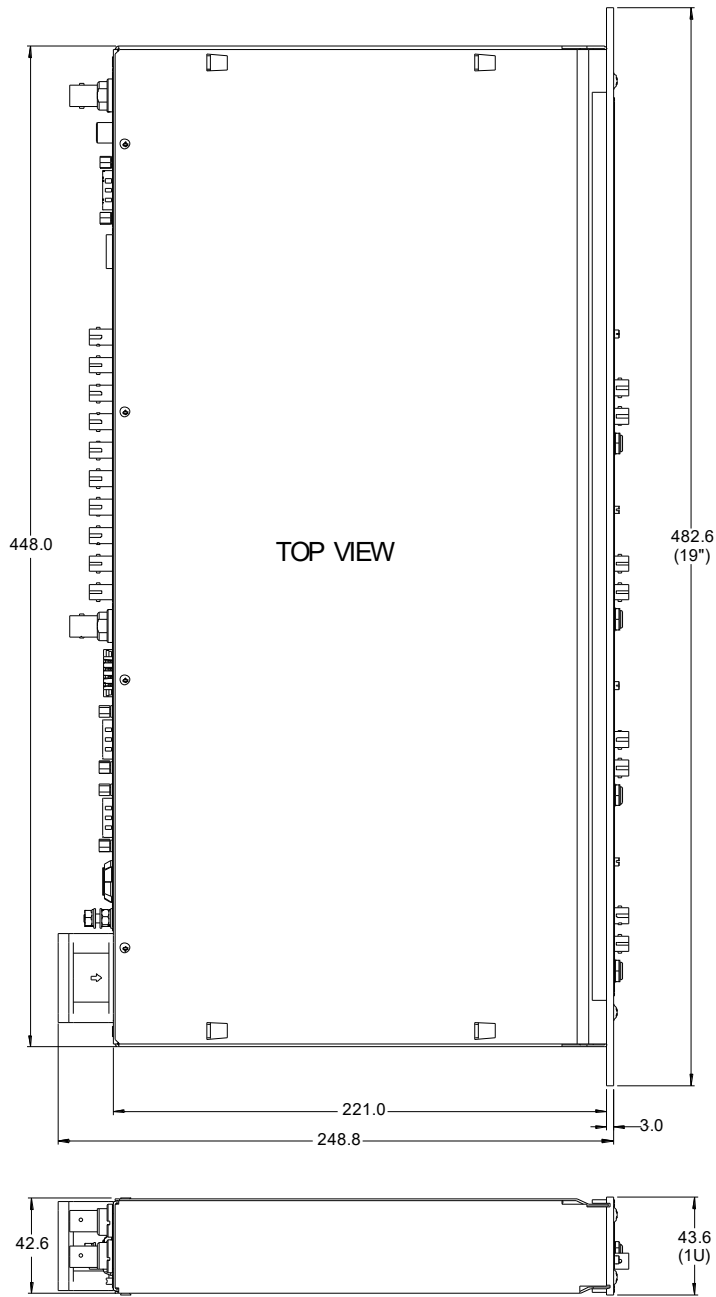

Dims mm

Pyramid Technical Consultants, Inc.,
135 Beaver Street, Suite 102
Waltham MA 02452 USA
Tel: +1 781 402 1700 (USA),
+44 1273 492001 (UK)

Email: support@ptcusa.com

www.ptcusa.com

The information herein is believed accurate at time of publication, but no specific warranty is given regarding its use. All specifications are subject to change.

All trademarks and names acknowledged.

ACI_DS_240319

