

# Is safety secured?

## PRECAUTIONS FOR HOT WORK

There must be a fire watch while work is ongoing



Project approved



Firefighting equipment in the area, at least two fire extinguishers



### Main hazards:

Take caution when material is dried, heated or melted



Welding, gas or electrical



Angle grinder




Installation of waterproofing membrane with torch

Flammable materials, explosive atmosphere: Work prohibited



# 112

Area safe: Work can begin

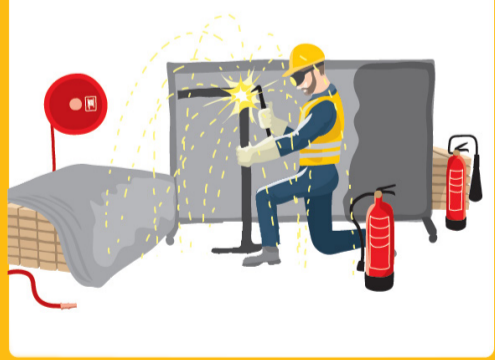

Use appropriate personal protective equipment (PPE)



Flammable material moved in safe distance, protected or soaked in water

