



Enterprise

## **WORKFLOW 5-SLOT BATTERY CHARGER**

**MANF PART NO: WF0000064040  
WF0000064130**

## **USER GUIDE**

## FEATURES

- LED charge indicators
- Security slot
- Gold plated charging contacts
- Simultaneously charges 5 battery packs

## COMPATIBILITY

- Compatible with Workflow Battery Packs

## PACKAGE CONTENTS

- Dock Charger
- 12V Power Supply (100-240V)
- User's Manual


Please visit [www.urbanarmorgear.com](http://www.urbanarmorgear.com) for the latest information and compatibility information.

## SPECIFICATIONS

Power Input	12V/5A - 6A
Power Output to Battery	5V, 1.5A
LED Indicator	Green = Ready/Fully Charged Amber = Charging
Dimensions	7.4in x 4.0in x 2.0in (188mm x 100mm x 50mm)
Storage Temperature	50°F to 75°F (10°C to 24°C).
Charging Temperature	40°F to 95°F (5°C to 34°C).
Operating Temperature	40°F to 95°F (5°C to 35°C).
Regulatory	CE, FCC, RoHS
Country of Origin	China
Warranty	1-year limited warranty

## CHARGE DOCK


5x Battery Slot

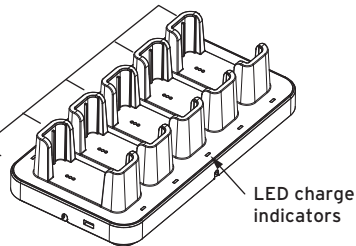

## INSTALLATION

1. **Select a Clean Location:** Ensure the installation area is clean and free from debris. Do not place the charger near combustible materials such as loose paper, flammable liquids, or gases.
2. **Connect the Power Supply:** Firmly insert the plug of the included power supply into the DC jack located at the bottom of the dock.
3. **Secure the Cable:** Route the cable through the designated cable channel to secure the connection and ensure the charger lies completely flat.
4. **Plug into Power Outlet:** Verify that you are using the correct power supply included with the charger, then insert the AC plug into an available power outlet.
5. **Avoid Obstructions:** Ensure that wires, cables, or other materials do not rest on top of the charger.


For additional safety information, please refer to the **Safety and Usage Guidelines** at the end of this manual.

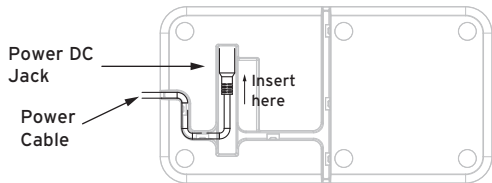

## CHARGING

1. **Insert the Battery Pack:** Place the battery pack into an empty slot on the charger, ensuring it sits evenly.
2. **Monitor the LED Indicator:** The LED will pulse amber while charging and turn green when the charge is complete.
3. **Avoid Overcharging:** Do not leave the battery pack or device charging longer than necessary.
4. **Remove Charged Battery Packs:** Do not store charged battery packs in the charger.

For additional safety information, please refer to the **Safety and Usage Guidelines** at the end of this manual.

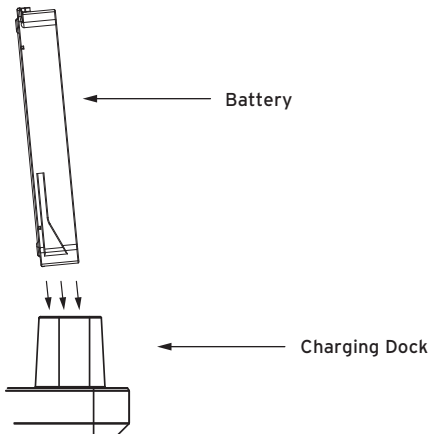

## 1 YEAR LIMITED WARRANTY

For warranty terms and conditions visit [urbanarmorgear.com/warranty](https://urbanarmorgear.com/warranty) or call (833)984-2UAG

Urban Armor Gear, LLC  
1601 Alton Parkway, Suite C, Irvine, CA 92606

Made in China



Multi Language Manual

**MODIFICATION:** Any changes or modifications of this device could void the warranty

PATENTS PENDING ©2024 URBAN ARMOR GEAR. All rights reserved. URBAN ARMOR GEAR® and UAG® logo are registered trademarks of URBAN ARMOR GEAR. LLC., Laguna Niguel, CA. All other trademarks and registered trademarks are the property of their respective owners.

## DECLARATION OF CONFORMITY

Hereby, Urban Armor Gear, LLC declares that the device is in compliance with Directives 2014/53/EU & 2011/65/EU. The full text of the EU declaration of conformity is available at the following internet address: <https://www.urbanarmorgear.com/EU-DOC>

**WARNING:** Under certain circumstances, lithium-ion batteries can present a risk of fire or explosion during charging, storage and use, that could result in personal injury, including death and/or property damage.

## **SAFETY AND USAGE GUIDELINES**

Urban Armor Gear (UAG) battery packs and chargers are designed to provide uninterrupted power for mobile phones and devices. While UAG battery packs are built to be durable and rugged, it is important that they be charged, stored and used safely. Like all lithium-ion batteries, UAG battery packs store a large amount of energy compared to traditional alkaline batteries. It is important for users to understand the potential risks and precautions, and to follow these safety guidelines and instructions associated with lithium-ion batteries. Users must conduct a thorough inspection of a battery pack and charger before each use to operate them safely.

### **Product Instructions**

- Always adhere to the instructions regarding charging, storage and use of battery packs and chargers provided with the devices and available on UAG's website at <https://enterprise.urbanarmorgear.com/manuals> Operate the battery packs and chargers only within the specifications provided by the manufacturer.

### **Environmental Conditions**

- Avoid charging, storing or using battery packs or chargers in environments with extreme temperatures, high humidity or direct sunlight.
  - Battery packs and chargers should be stored in a controlled environment, ideally between 50°F to 75°F (10°C to 24°C).
- Do not charge battery packs or charge devices in temperatures below 40°F (5°C) or above 95°F (35°C) to prevent damage.
  - Storage Temperature: 50°F to 75°F (10°C to 24°C).
  - Charging Temperature: 40°F to 95°F (5°C to 34°C).
  - Operating Temperature: 40°F to 95°F (5°C to 35°C).
- Keep battery packs and devices away from open flames, flammable or combustible materials or any high-heat source.
- Do not submerge the battery pack or charger in water.
- Ensure that the battery pack is dry before attaching to a device or charger.

## **Charging Location and Process**

- Avoid leaving a battery pack or device charging for longer than necessary.
- Charged battery packs should not be stored in a charger.
- Do not leave battery packs, devices or chargers unattended while charging.
- Avoid contact between battery packs or chargers and metal objects to prevent short-circuiting.
- Ensure that the charging area is clean and free of any debris before use.
- Do not charge battery packs or devices on flammable surfaces, including wood or fabric.
- Do not charge battery packs or devices in an area that includes combustible materials, including loose paper or flammable liquids and gasses.
- Do not allow wires, cables or other materials to rest on top of chargers.

## **Battery and Charger Compatibility**

- Use only the chargers provided with or approved by the manufacturer for charging your battery pack or device.
- The charger provided with or approved for use with your battery pack is specifically designed to be used with that battery pack; do not substitute other batteries or chargers for use with each other.

## **Operation and Maintenance Guidelines**

- Do not modify, disassemble, puncture, cut, crush, or incinerate battery packs or chargers.
- Do not intentionally cause a battery pack, device or charger to short circuit.
- Defective or damaged battery packs, devices or chargers should not be used under any circumstances.
- Do not use battery packs, devices or chargers that are damaged or have visible cracks, dents, holes or tears.
- If you suspect a battery pack, device or charger is defective or damaged, do not attempt to use it.
- If a battery pack, device or charger overheats, or you notice an odor or smoke, change in shape/color, leaking or odd noises from a device **discontinue use and disconnect from power sources immediately.**

### Temperature Changes During Operation

- During normal operation, it is common for a battery pack or an attached device to feel warm to the touch. This warmth may increase when the device is being charged and used simultaneously.
- Should the battery pack show signs of overheating, such as emitting heat that is uncomfortable to the touch (typically exceeding 118°F or 48°C), immediately disconnect the battery pack from any device and let it cool down before attempting to charge it again. For optimal performance and safety, please wait until the battery pack has returned to a normal temperature before resuming charging of the battery pack or your device.

UAG DISCLAIMS ANY RESPONSIBILITY FOR DAMAGES OR INJURIES RESULTING FROM THE IMPROPER USE OR MISHANDLING OF LITHIUM-ION BATTERIES AND CHARGERS. USE OF BATTERIES AND CHARGERS IS AT YOUR OWN RISK.



No washing



No metal objects  
on the surface



No knocking



20241004-V2