





LED UTILITY BARS 5-Watt / Double Row


ECCO's 5-Watt Double Row utility bars offer long, maintenance-free life expectancy, low amp draw, and extremely bright white light output. Available in a range of lengths, each with a choice of two mounting options, these bars are an ideal choice for both commercial and recreational applications. Features include 12-24 VDC operation; 5-watt LEDs; flood, spot, or combination beam patterns; aluminium housing; polycarbonate lens; IP67 rating.

Features and Benefits

- High-intensity beam
- Flood, spot, and combo beams
- Permanent pivot mount: fixed-width (shown) and adjustable-width brackets included
- Aluminium heatsink housing and polycarbonate lens

Models							
PART NO.	VOLTAGE	AMPS	LENGTH	LEDS	RAW LUMENS	EFFECTIVE LUMENS	TYPE
EW3208-F	12-24	3.8	8" [203]	12	2150	1950	Flood
EW3208-S	12-24	3.8	8" [203]	12	2450	2250	Spot
EW3214	12-24	9.3	14.3" [363]	24	6700	4800	Combo
EW3225	12-24	17.3	25" [635]	44	12,300	8800	Combo
EW3233	12-24	25	33.5" [851]	60	16,800	12,000	Combo
EW3242	12-24	32	42" [1067]	76	21,300	15,200	Combo

Dimensions

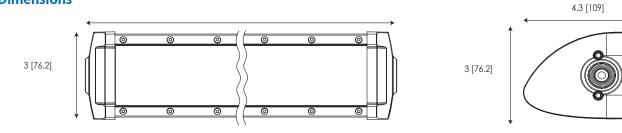

+44 (0)113 237 5340 | sales@eccogroup.com

WWW. ECCOESG. COM