

WE ARE
Façade Systems and more.



Ibstock
At the heart of building

FASTWALL®
PANELISED BRICK FAÇADE SYSTEM

Introduction

FastWall® is an interlocking brick-faced GRC panel system.

Designed to work with panelised timber, modular construction and light gauge steel framing.

FastWall® provides a finish indistinguishable from traditional brick work.

Panels are fabricated offsite, meaning installation is limited to mechanical fixing in position and pointing.

SUITABLE FOR:



- Low rise, panelised applications
- New builds, refurbishments, or retrofit projects adopting MMC
- Internal and external specification

TESTING AND CERTIFICATION



- Classified A1 reaction to fire BS EN 13501-1
- Tested to CWCT standards
- Kiwa BDA certified

Introducing the IBrick

FastWall® uses the Istock IBrick, a purpose-made thin brick.

Unlike traditional brick slips, which are cut from solid bricks, the IBrick is an extruded thin brick. The result is zero waste and limitless design potential through texturing and decorating techniques.

IBricks are manufactured at Nostell Horizon, our Ceramic Facades Manufacturing Centre.



Benefits of FastWall®

SPEED



With no limitations on the number of courses that can be laid in a day or delays due to inclement weather, FastWall® offers significantly faster installation than traditional brickwork.

SKILLS




The different skillset required to install FastWall® enables it to be installed by a wider selection of site operatives, helping to address challenges with labour availability.

QUALITY



Factory-controlled environments enable the production of FastWall® panels to exacting standards, ensuring a higher standard of quality compared to traditional methods.

CARBON REDUCTION



Reduced embodied carbon over traditional brick, combined with a potential reduction in transport emissions due to a smaller and lighter product per square metre of brickwork.

THERMAL EFFICIENCIES




FastWall® offers a reduced wall thickness whilst maintaining thermal efficiency without increasing overall footprint.

VERSATILITY



Combining IBricks produced from our ceramic facade manufacturing centre with FastWall® enables greater flexibility and versatility over colour, shape, design, style, and texture.

IBSTOCK IBRICK

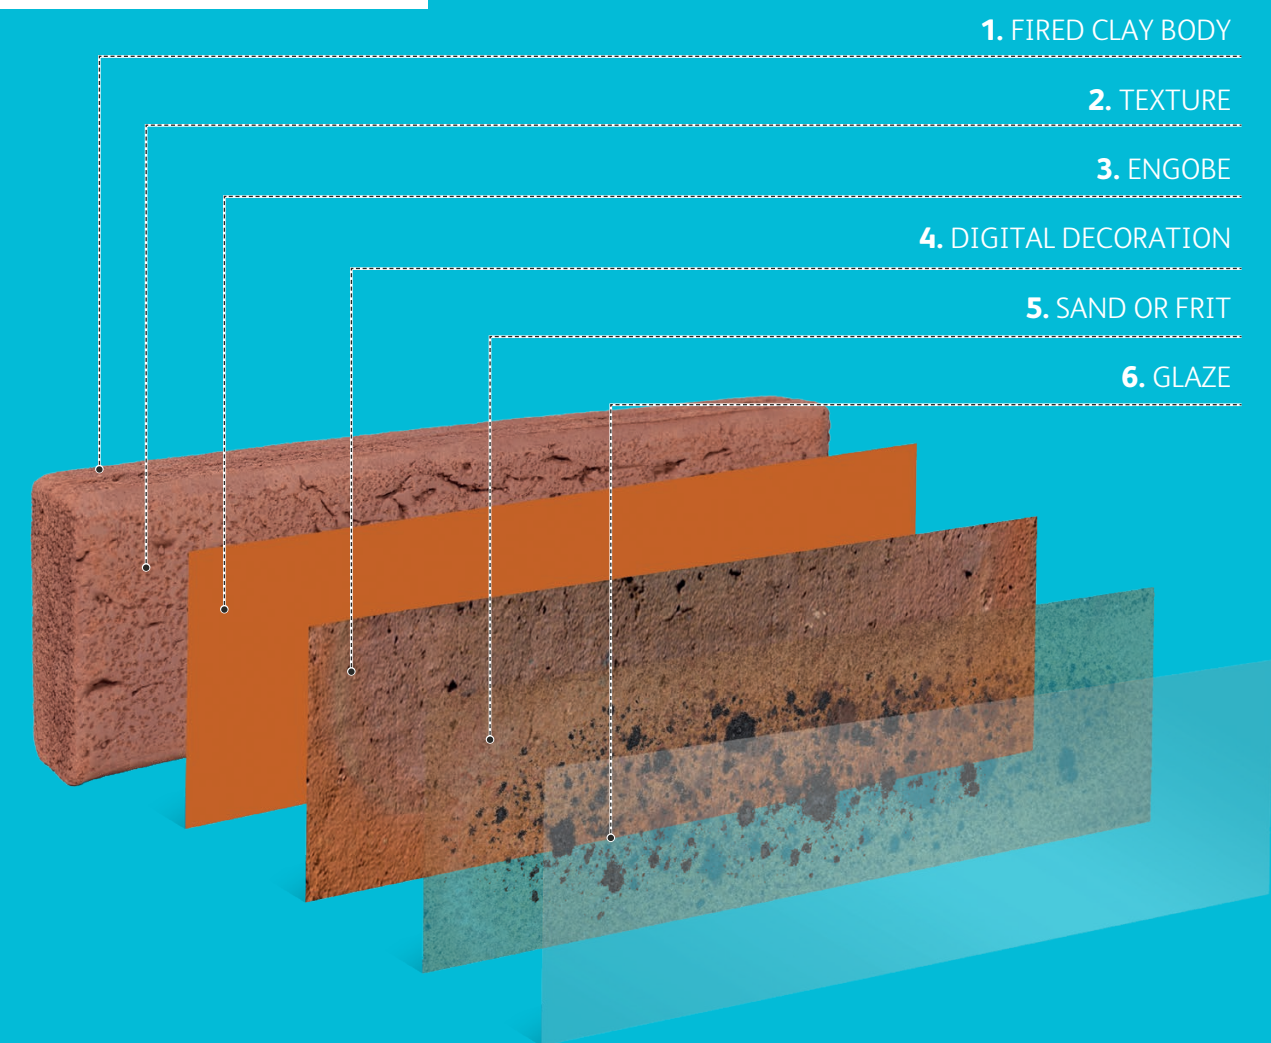

FastWall® Panel Options

The FastWall® panel collection comprises over 60 panel sizes across five, six, seven and eight courses, including end, central, corner, and gable designs. Bespoke panels can be designed to suit any project.

The panels are designed to provide flexibility within the project, offering maximum coverage with the minimum number of panels required.



Service Led Solution

Our design and technical team will work with you to scope and design your FastWall® layout and sequencing.

FastWall® is more than a façade solution, it’s a complete service journey. From your first enquiry through to final handover, our team is there to guide, support, and deliver with purpose and care.

Stage	Our Commitment
Sales	Clear, honest advice based on your project’s unique needs
Design	Responsive, collaborative design coordination
Production	Rigorously managed Quality Assurance and Control aligned with delivery expectations
Delivery	Organised, trackable, and aligned to your site sequence
Site Support	Practical installation materials and accessible support
Handover	Structured documentation for full traceability and project close out

Technical Detail

Sales and Pre Design Engagement

- **Understanding Comes First**
Our technical sales team takes time to understand your vision and challenges. We tailor our proposals to meet real world constraints and opportunities, not just to deliver a product, but to offer a solution.
- **Detailed Scoping and Seamless Handover**
Once a project is confirmed, all information is carefully captured and handed over to the design team, ensuring smooth continuity and clarity from day one.

Design Collaboration That Adds Value

- **Tailored Design Support**
We work closely with your architect, engineers, and site team to ensure all FastWall® layouts, fixing details, and sequencing are perfectly aligned with your project goals.
- **Transparent Communication**
Our design updates are structured, consistent, and proactive — not reactive. You’re always informed of progress and options.
- **Installation Guides and Visuals**
Every system includes clear, practical support materials: from fixings and setting out points, to 3D models and component references.

Smooth, Predictable Deliveries

- **Site Coordination in Advance**
We provide clear delivery notes, labelled crates, and contactable support for offloading and handling guidance.
- **Designed for Site Efficiency**
Panels arrive pre organised in installation order, saving your team time and resources.

Programme Integration

- **Plan with Confidence**
We align panel release dates with your programme and identify what can be brought forward to meet key site milestones.
- **Adaptive to Change**
If something shifts, we’ll help re sequence your deliveries or release early design packs to keep progress on track.

Manufacturing Precision & Quality Assurance

- **Built on Trust, Backed by Process**
Each panel is produced using rigorous QA checks, ensuring structural integrity, finish quality, and complete traceability.
- **Transparency Throughout**
We welcome client visits to our factory, offer production updates, and provide photographic sign off where needed.
- **Ready When You Are**
Panels are prepared and packed to match your install sequence — no guesswork, no confusion.

Aftercare and Handover

- **Support Doesn’t Stop at Delivery**
We’re on hand to guide your team through fixing, finishing and any additional site coordination.
- **Complete Close Out Pack**
From as-built drawings to bracket details, we deliver everything you need for your O&M files and regulatory compliance.

IBSTOCK

Ibstock plc
Leicester Road, Ibstock,
Leicestershire, LE67 6HS
www.ibstock.co.uk

E: fastwall@ibstock.co.uk



Ibstock
At the heart of building