



SITE PRACTICE AND TROUBLESHOOTING LAYING 'FROGGED' BRICKS

The terminology for the indented portion in moulded bricks is reputed to have derived from the indented marks that pit and brickwork ponies left in soft earth -the cleft in their hooves being called a 'frog'.

British Standard Code of Practice BS 8000-3 Workmanship on building sites states that; **"Unless otherwise advised, lay single frog bricks with frog uppermost and double frogged with deeper frog uppermost. Fill all frogs with mortar.....** Brick walls built with frogs down and unfilled are weaker and less resistant to sound transmission. Advice should be sought as to whether bricks laid frog down are acceptable".

Many bricklayers prefer to lay bricks frog down as they believe it to be a faster method and it uses less mortar. However the performance of the brickwork can be affected by insufficiently filled frogs.


STRENGTH AND STABILITY

Compressive strength tests on frogged bricks have traditionally required them to be fully filled with mortar beforehand. The resulting figures are used by engineers in calculating the loads brickwork can support. Brickwork with unfilled frogs will fail at lower loads.

SOUND INSULATION

Building Regulations for England and Wales require dwellings to be constructed to certain standards so as to reduce the levels of transmission of sound between and within dwellings.

For solid masonry walls the resistance to airborne sound depends mainly on the mass per unit area of the wall (density).

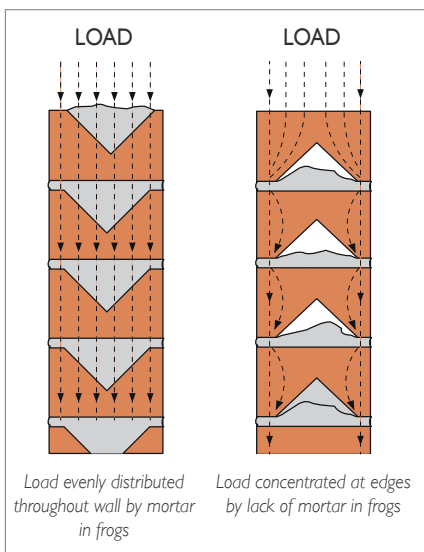

To maximise this:-

- Fill and seal all masonry joints with mortar.
- Use bricks that extend to the full thickness of the wall.
- Lay brick frog up to achieve required mass per unit area and avoid air paths.

FIXINGS TO BRICK WALLS


Fixings to walls must be used with care so as not to disrupt the brickwork. The whole structure is less fragile when the voids are fully filled with mortar and there is maximum bonding of all surfaces.

AESTHETICS

When laid correctly, the creases on the face of handmade or simulated handmade bricks form a 'smile'. Aesthetically it will look better if all the bricks are uniformly laid but will also help to shed water.

EXCEPTIONAL CIRCUMSTANCES

In very exceptional circumstances It is possible to lay bricks with the frog down and fully filled but it can be time consuming and suitable for particular details only i.e. if 'handed' bricks are not available for either side of an opening it may be possible to invert some on one side. This may not be acceptable for some textured products.

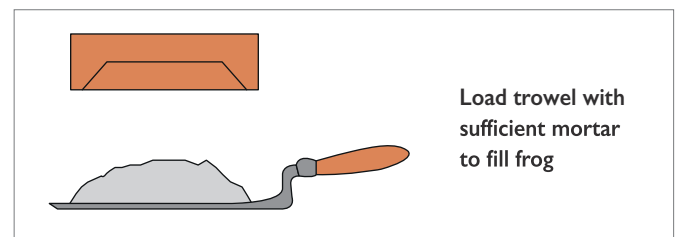

To lay bricks with frogs down and filled, the trowel must be loaded with sufficient mortar and brick and trowel lowered into position.

It is not intended that voids in perforated bricks are filled with mortar.

Although the instructions contained in this publication and any other information published by Ibstock Brick Ltd are believed to be accurate at the date of publication, they are strictly for guidance only and Ibstock Brick Ltd accepts no liability in relation to their use or for any losses, howsoever caused. You are responsible for taking all reasonable steps to ensure your use of the product conforms to all applicable health and safety requirements from time to time. If in doubt, please consult appropriately qualified persons. All products sold by Ibstock are sold subject to Ibstock's Terms and Conditions of Sale, a copy of which is available on request.