



AirPrime EM74x1

Technical Note—Thermal Mitigation



SIERRA
WIRELESS®

41114015
Rev 1

Important Notice

Due to the nature of wireless communications, transmission and reception of data can never be guaranteed. Data may be delayed, corrupted (i.e., have errors) or be totally lost. Although significant delays or losses of data are rare when wireless devices such as the Sierra Wireless modem are used in a normal manner with a well-constructed network, the Sierra Wireless modem should not be used in situations where failure to transmit or receive data could result in damage of any kind to the user or any other party, including but not limited to personal injury, death, or loss of property. Sierra Wireless accepts no responsibility for damages of any kind resulting from delays or errors in data transmitted or received using the Sierra Wireless modem, or for failure of the Sierra Wireless modem to transmit or receive such data.

Safety and Hazards

Do not operate the Sierra Wireless modem in areas where blasting is in progress, where explosive atmospheres may be present, near medical equipment, near life support equipment, or any equipment which may be susceptible to any form of radio interference. In such areas, the Sierra Wireless modem **MUST BE POWERED OFF**. The Sierra Wireless modem can transmit signals that could interfere with this equipment.

Do not operate the Sierra Wireless modem in any aircraft, whether the aircraft is on the ground or in flight. In aircraft, the Sierra Wireless modem **MUST BE POWERED OFF**. When operating, the Sierra Wireless modem can transmit signals that could interfere with various onboard systems.

Note: Some airlines may permit the use of cellular phones while the aircraft is on the ground and the door is open. Sierra Wireless modems may be used at this time.

The driver or operator of any vehicle should not operate the Sierra Wireless modem while in control of a vehicle. Doing so will detract from the driver or operator's control and operation of that vehicle. In some states and provinces, operating such communications devices while in control of a vehicle is an offence.

Limitation of Liability

The information in this manual is subject to change without notice and does not represent a commitment on the part of Sierra Wireless. SIERRA WIRELESS AND ITS AFFILIATES SPECIFICALLY DISCLAIM LIABILITY FOR ANY AND ALL DIRECT, INDIRECT, SPECIAL, GENERAL, INCIDENTAL, CONSEQUENTIAL, PUNITIVE OR EXEMPLARY DAMAGES INCLUDING, BUT NOT LIMITED TO, LOSS OF PROFITS OR REVENUE OR ANTICIPATED PROFITS OR REVENUE ARISING OUT OF THE USE OR INABILITY TO USE ANY SIERRA WIRELESS PRODUCT, EVEN IF SIERRA WIRELESS AND/OR ITS AFFILIATES HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES OR THEY ARE FORESEEABLE OR FOR CLAIMS BY ANY THIRD PARTY.

Notwithstanding the foregoing, in no event shall Sierra Wireless and/or its affiliates aggregate liability arising under or in connection with the Sierra Wireless product, regardless of the number of events, occurrences, or claims giving rise to liability, be in excess of the price paid by the purchaser for the Sierra Wireless product.

Patents

This product may contain technology developed by or for Sierra Wireless Inc. This product includes technology licensed from QUALCOMM®. This product is manufactured or sold by Sierra Wireless Inc. or its affiliates under one or more patents licensed from MMP Portfolio Licensing.

Copyright © 2020 Sierra Wireless. All rights reserved.

Trademarks Sierra Wireless®, AirPrime®, AirLink®, AirVantage® and the Sierra Wireless logo are registered trademarks of Sierra Wireless.

Windows® is a registered trademark of Microsoft Corporation.

Macintosh® and Mac OS X® are registered trademarks of Apple Inc., registered in the U.S. and other countries.

QUALCOMM® is a registered trademark of QUALCOMM Incorporated. Used under license.

Other trademarks are the property of their respective owners.

Contact Information

Sales information and technical support, including warranty and returns	Web: sierrawireless.com/company/contact-us/ Global toll-free number: 1-877-687-7795 6:00 am to 5:00 pm PST
Corporate and product information	Web: sierrawireless.com

Revision History

Revision number	Release date	Changes
1	August 2020	Created

>> Contents

Thermal Mitigation Methods	5
Overview	5
Heatsink/Active Cooling	5
Thermal Thresholds	6
Current Temperature	7
Thermal Mitigation	7
UL Data Throttling	7
DL Data Throttling	8
UL Power Throttling	8
Emergency Service	9
Current Thermal Mitigation Status	9
Low Power Mode	9

>> Thermal Mitigation Methods

Overview

For safety and performance reasons, heat generated by embedded modules (such as the Sierra Wireless AirPrime EM74x1) should be dissipated in the host device using a combination of passive (heatsink) and active cooling strategies.

If these strategies are insufficient, the EM74x1 module automatically attempts to reduce its operational temperature via a series of thermal mitigation techniques. These mitigation techniques are enabled as the operational temperature reaches specific thresholds for each technique.

This document describes these thermal mitigation techniques.

Heatsink/Active Cooling

Sierra Wireless recommends heat-sinking the module, and maximizing airflow over/ around the module (e.g. by using existing fans in the host device). Refer to the module's Product Technical Specification (available at source.sierrawireless.com) document for additional details.

Note: The majority of the heat generated by the EM74x1 module is channeled to its bottom face on the large copper ground pad shown below.

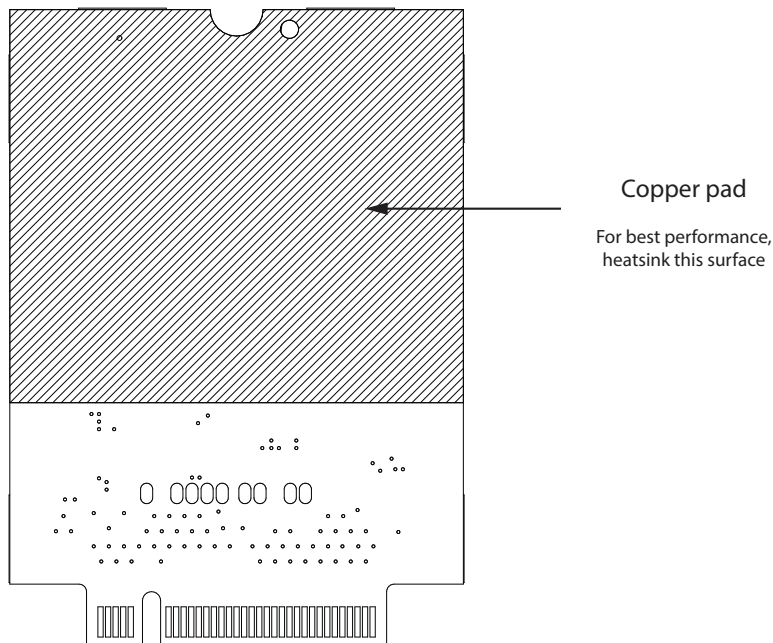


Figure 1: Recommended Heatsink Location

Thermal Thresholds

Table 1 describes the thermal thresholds at which the EM74x1 module’s operating state changes, including the thresholds at which the module enables thermal mitigation actions as it attempts to reduce its operational temperature.

These thresholds refer to the module’s operational temperature, which is affected by:

- Module’s ambient air temperature—This should be kept as close as possible to the host platform’s ambient temperature. If the module is in a small space, make sure the space is ventilated and the device is on a heatsink. Otherwise, the module’s ambient air temperature could increase to tens of degrees higher than the platform’s ambient air temperature.
- Heatsink effectiveness at spreading heat to avoid hot spots on the module.
- Data throughput rates
- UL and DL Carrier aggregation
- Transmit output power

Important: *If a heatsink is not used to spread the heat on the bottom of the module, hot spots may cause thermal mitigation to occur at lower reported board temperatures.*

Table 1: EM74x1 Operating State Thermal Thresholds^a (with heatsink)

Operating state	Approx. Board Temperature (°C)	
	Threshold to enter state	Threshold to exit state
High temperature shutdown (LPM)	110	84
Emergency service (Fourth thermal mitigation action)	107	95
UL Power Throttling ^b (Third thermal mitigation action)	91	79
DL Data Throttling ^b (2CA→1CA) (Second thermal mitigation action)	90	80
UL Data Throttling (First thermal mitigation action)	86	74
Class B (non-3GPP-compliant) operation	>70 to 85 ^c	
Class A (3GPP-compliant) operation	>-30 to 70	
Class B (non-3GPP-compliant) operation	>-45 to -30	
Low temperature shutdown (LPM)	-45	-29

- a. State change thresholds are based on default values. If values are modified using !PCTEMPLIMITS, entry/exit thresholds will vary from stated values.
- b. Sequence for UL Power Throttling and DL Data Throttling may switch due to the small difference between trigger points.
- c. A high temperature warning (QMI_DMS_SWI_EVENT_REPORT_IND) is issued when the temperatures reaches 85°C.

Current Temperature

The module's temperature can be read using the following methods, which return the overall board temperature:

- AT command—**!PCTEMP?** (See AirPrime EM75xx and EM/MC74x1 AT Command Reference (Document #41111748) for details.)
- SDK API call—**SLQSNasSwiModemStatus**

In general, the reported temperature should be kept below 80°C to ensure thermal mitigation actions are not initiated. As noted in [Table 1](#), the first thermal mitigation action (UL Data Throttling) is not reversed until the temperature drops significantly.

Thermal Mitigation

The EM74x1 employs the following thermal mitigations to reduce the heat generated on the uplink (UL) and downlink (DL) paths as the operational temperature reaches the thresholds in [Table 1](#):

- UL Data Throttling—Reduce uplink data rate
- DL Data Throttling—Reduce number of receive carriers
- UL Power Throttling—Reduce transmission output power
- Emergency Service—Limited service only

UL Data Throttling

UL data throttling is the first thermal mitigation method employed by the EM74x1.

UL data throttling acts to reduce the uplink data rate. Throttling begins when either of the module's PAs approaches the thermal threshold (see [Table 1 on page 6](#)), causing the module to step down the maximum throughput from 150 Mbps to 10 kbps as shown in [Figure 2](#).

If the:

- PA temperature continues to increase, the second thermal mitigation method ([DL Data Throttling](#)) occurs.
- Board temperature drops to the exit threshold, the module steps the maximum throughput back up from 10 kbps to 150 Mbps.

Thermal mitigation steps



Clearing thermal mitigation

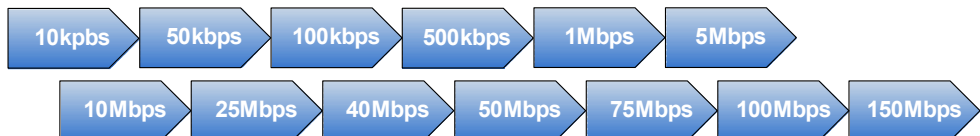


Figure 2: Uplink Thermal Mitigation Via Data Throttling

DL Data Throttling

DL data throttling is the second thermal mitigation method employed by the EM74x1, if uplink data throttling is not able to control the module's temperature.

Note: The sequence for UL Power Throttling and DL Data Throttling may switch due to the small difference between trigger points.

The amount of heat generated by the downlink path is dependent on the number of receive carriers in operation. The EM74x1 aggregates two receive carriers to support DL rates up to Cat 6 (300 Mbps, 2CA).

The module's main processor is responsible for processing the data from these carriers. If its overall temperature is close to the DL Data Throttling threshold in [Table 1](#), the module reduces operation to 1CA to reduce overall temperature.

If the:

- PA temperature continues to increase, the third thermal mitigation method ([UL Power Throttling](#)) occurs.
- Overall temperature drops to the exit threshold, the module increases operation back to normal (2CA).

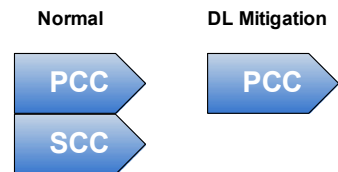


Figure 3: Downlink Thermal Mitigation

UL Power Throttling

UL power throttling is the third thermal mitigation method employed by the EM74x1.

Note: The sequence for DL Data Throttling and UL Power Throttling may switch due to the small difference between trigger points.

If uplink and downlink data throttling are not able to control the module's temperature, the module slowly reduces the transmit power from maximum power to 10 dBm, as shown in [Figure 4](#).



Figure 4: Uplink Thermal Mitigation via Power Throttling

Depending on RF coverage, this power throttling could reduce the signal strength the base station sees and, in fringe coverage areas, the base station might drop the call if coverage shrinks to the point where the link can no longer be kept up.

If the:

- PA temperature continues to increase, the fourth thermal mitigation method ([Emergency Service](#)) occurs.
- Overall temperature drops to the exit threshold, the module returns the transmit power to maximum power.

Emergency Service

Emergency Service is the fourth (and final) thermal mitigation method employed by the EM74x1, if uplink power throttling is not able to control the module's temperature.

In Emergency Service state:

- Voice-capable module will drop the current call (if one is in progress). Only emergency calls will be allowed.
- Module remains attached to the network, providing limited service

If the overall temperature drops to the exit threshold, a voice-capable module can be used to make a call.

Current Thermal Mitigation Status

To display details of the module's current thermal mitigation status, use the **!TMSTATUS** command (see AirPrime EM75xx and EM/MC74x1 AT Command Reference (Document #41111748) for details).

Low Power Mode

If DL and UL thermal mitigation actions are insufficient and the module exceeds the high temperature shutdown threshold (110°C), it drops the current data session and enters low power mode (LPM—RF disabled, module operational). The module remains in this mode until the temperature drops to the exit threshold.

When the module leaves LPM, DL and UL thermal mitigation remain in effect until the operating temperature decreases to the exit levels described in [Table 1](#).

Note: This has always been the behavior for extreme temperature events.
