



APPROVED BY:	

DATE APPROVED:

CPES-2 Conventional Roof Equipment S	<u>upport</u>	PROJECT NAME:	
STANDARD FEATURES	OPTIONS	CITY, STATE:	
 18 Ga. Galvanized Steel Construction Fully Welded One-Piece Construction. Prime Painted after Fabrication. Full Depth Internal C-Channel Reinforcing on 12" Centers. 6" Spreader Channels on 12" Centers. Counterflashing Attached with Tek-Screws & Neoprene Washer. Pressure Treated 2x4 Wood Nailer (3-1/2" Width). Fully Mittered and Welded 3" Cant. 	1. 2. 3.	CUSTOMER:	
	4.	JOB NUMBER:	



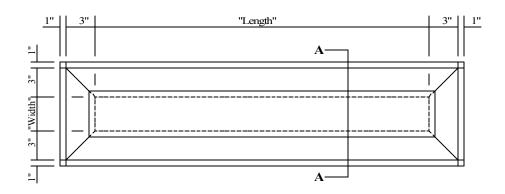

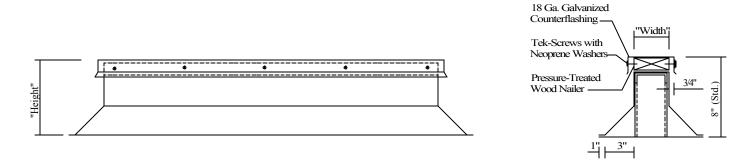

ELEVATION

SECTION A-A

QUANTITY	LENGTH	WIDTH	HEIGHT	TAG