


This map is reproduced from Ordnance Survey material with the permission of Ordnance Survey on behalf of the Controller of Her Majesty's Stationary Office © Crown copyright. Unauthorised reproduction infringes Crown copyright and may lead to prosecution or civil proceedings. Stockport Metropolitan Borough Council 100019571 2023

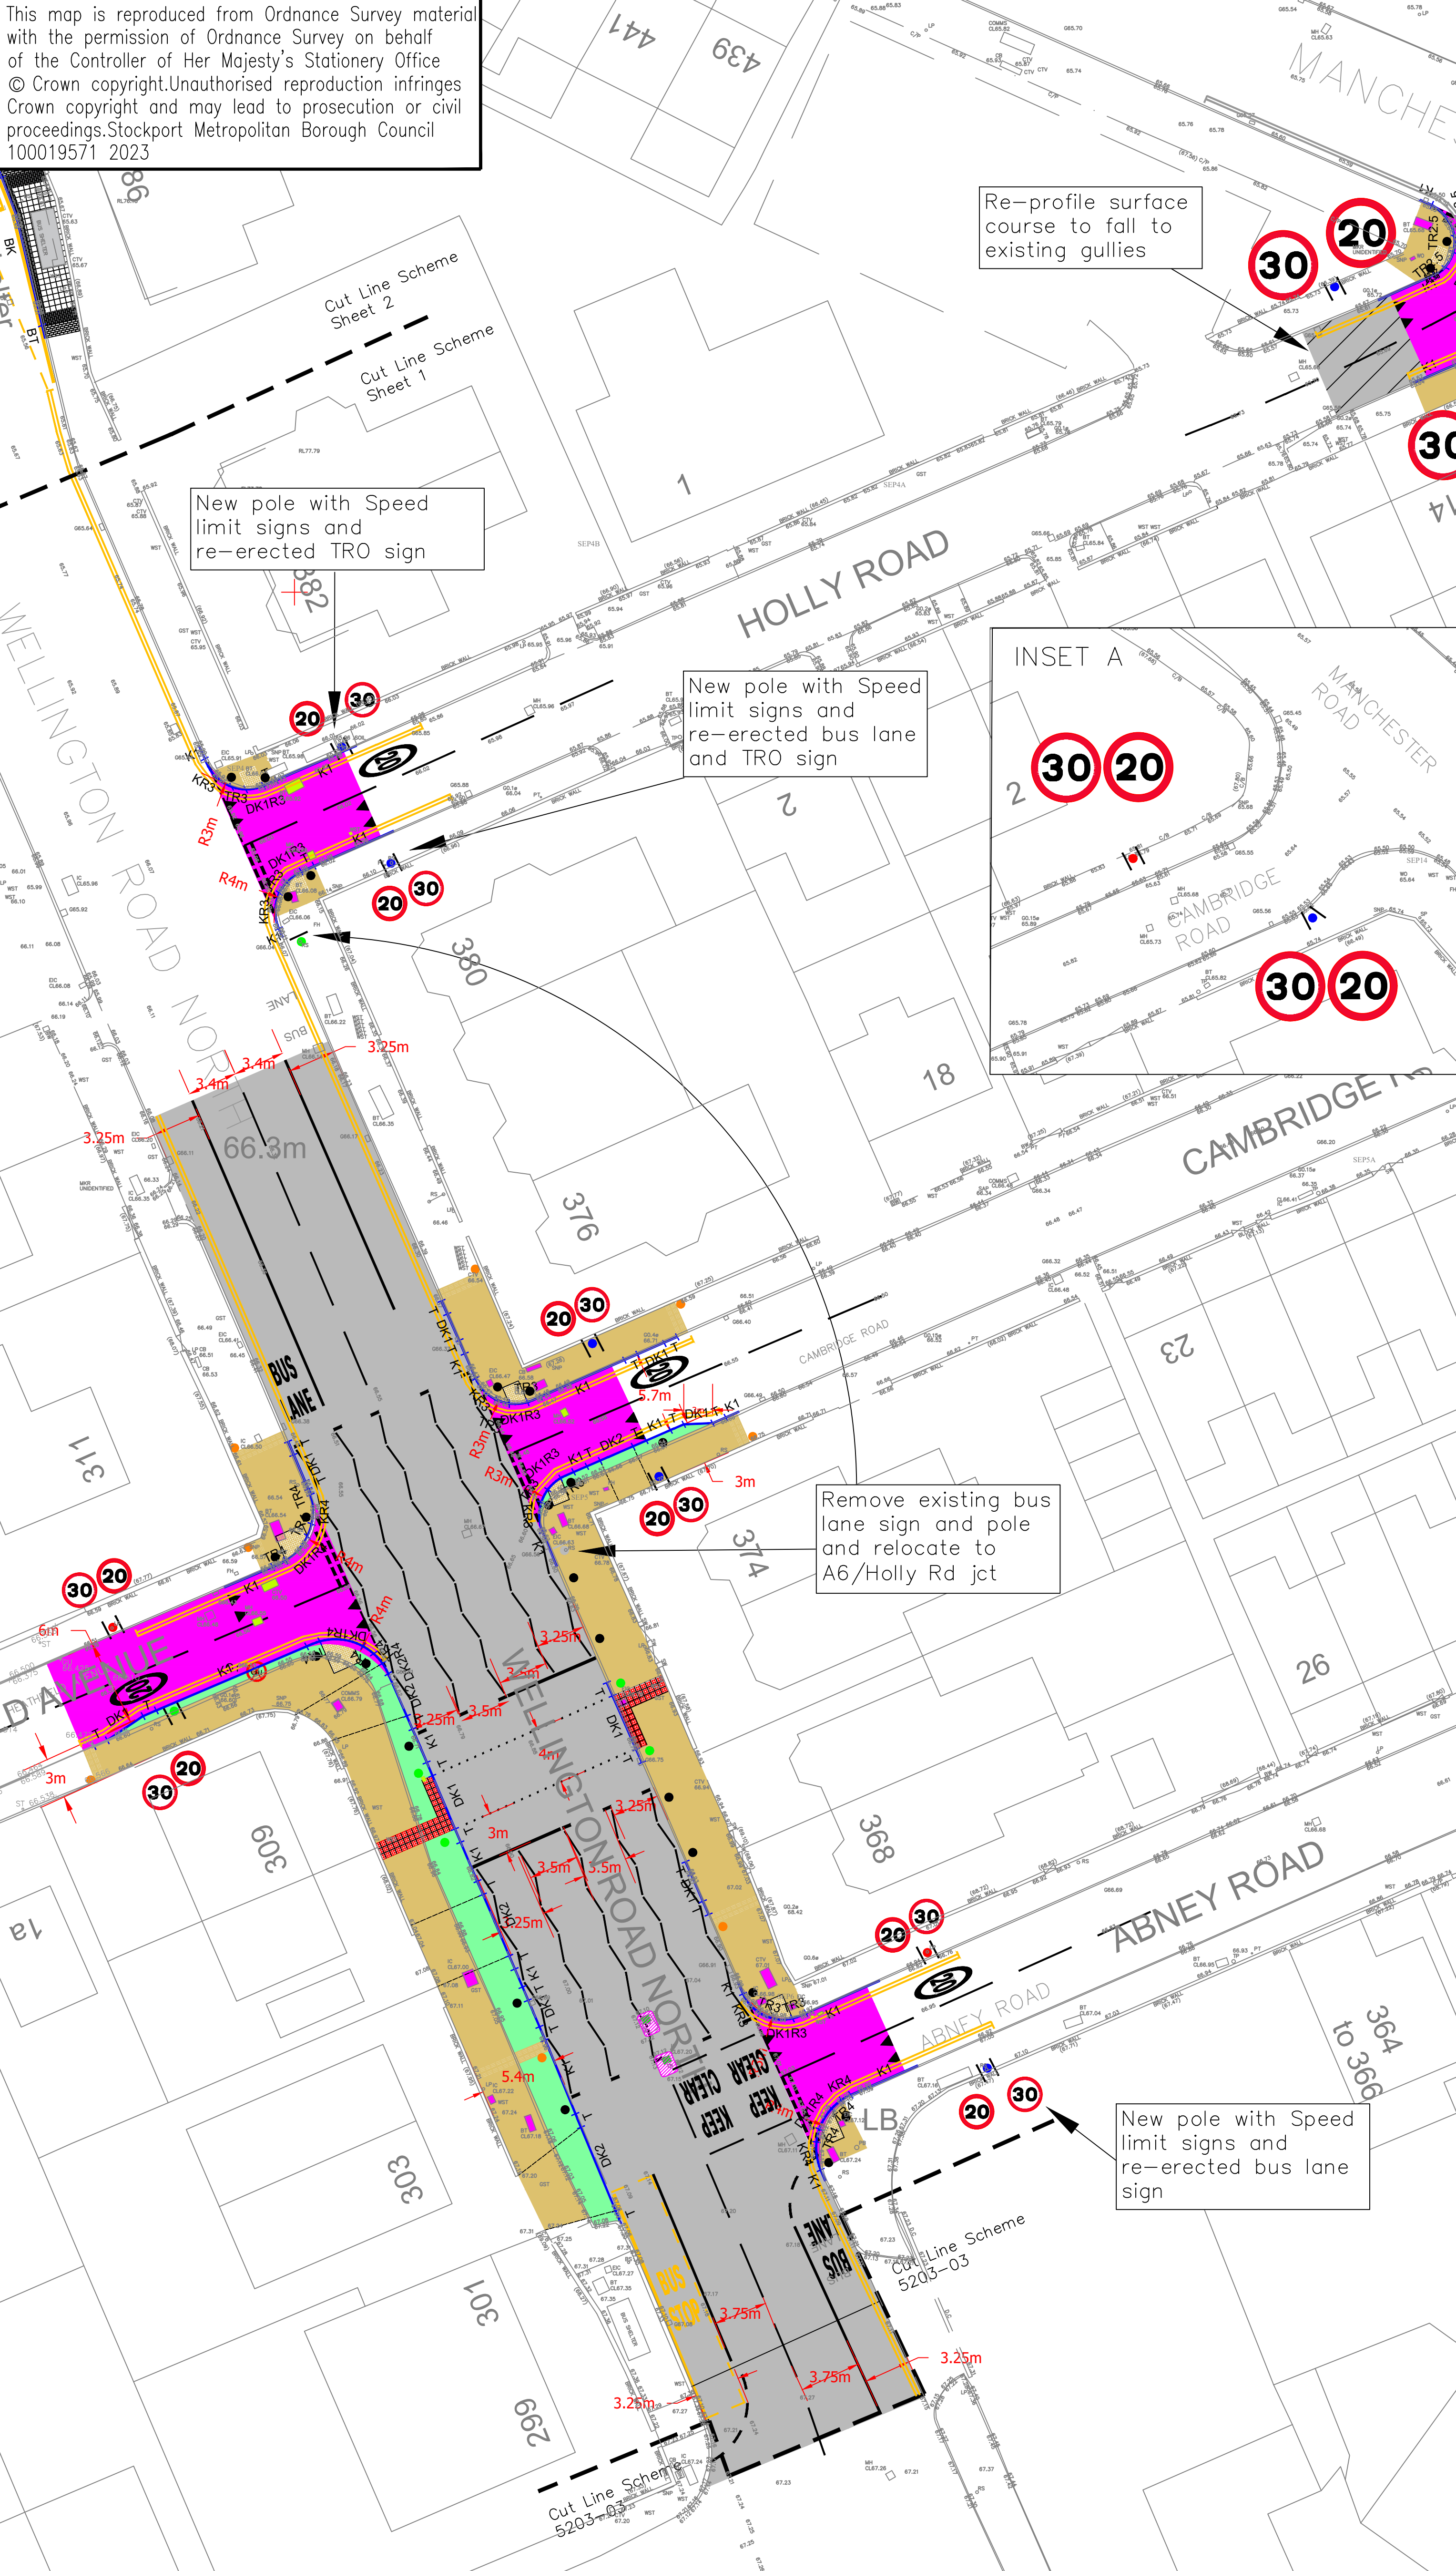

Re-profile surface course to fall to existing gullies

New pole with Speed limit signs and re-erected TRO sign

New pole with Speed limit signs and re-erected bus lane and TRO sign

Remove existing bus lane sign and pole and relocate to A6/Holly Rd jct

New pole with Speed limit signs and re-erected bus lane sign

- KEY**
- Proposed New Kerb - See STD STP/H/07
K1 - 255 x 125mm with 125mm Kerb Face = 76m
T = 37m
DK1 6mm Upstand = 36m.
DK2 20mm Upstand = 16m
UK1 6mm Upstand (Laid upturned to form Channel) = 3m
 - Existing Kerb/Channel Removal. Quantity 242m.
 - Driveway Indication Lines
 - Carriageway Resurfacing - Plane off 30mm and lay 30mm Surface Course AC10 Close Surf 100/150. As per STD STP/S38/H/01 Quantity 42m²
 - Carriageway Resurfacing - Plane off 100mm and lay 40mm Surface Course PS9 Ultiplier 10 Surf PMB with 68 PSV. Binder Course 60mm thick, AC 20 dense bin 100/150 as per STD STP/H/47. Quantity 1418m²
 - Carriageway Full Construction - Remove 125mm footway Construction to island and lay 40mm Surface Course PS9 Ultiplier S 10 Surf PMB 68PSV. 60mm Binder Course AC 20 40/60, pen. 450mm ST4 Concrete Quantity - 4m³
 - Footway Resurfacing - Plane off 90mm to sub base and lay 30mm Surface Course PMB Ultiporous 6mm. 60mm Binder Course Ultiporous 20mm 100/150 Quantity 441m²
 - Buff Tactile BLOCK Paving - Plane off 185mm to sub base and lay Buff Tactile MOT sub-base to CL 803. Quantity 20m²
 - Red Tactile Paving - Plane off 95mm to sub base and lay Red Tactile Paving as per STD STP/H/04 Quantity 16m²
 - Buff Corduroy Hazard Paving - Plane off 95mm to sub base and lay corduroy Paving Quantity 22.2m²
 - Carriageway - Traffic Calming Feature - Flat Top Hump
Plane out 30mm Carriageway surfacing and construct Flat Top Hump - Kerb to Kerb 25mm Surface Course AC10 close surf 100/150. 50mm Binder Course AC20 dense bin 100/150 core. As per Standard Detail STP/H/41 Type 2 Quantity 400m²
 - Existing Manhole Chambers/Stop Tap/Hydrant Covers
Adjust by approx. 75mm to new levels
Quantity 9
 - Drainage - Existing Gully pot to be removed, void back filled with ST4 Concrete. Connection re-used for new gully. Quantity 1
 - Drainage - New Type 1 gully as per STD STP/DR/05
Precast Concrete Trapped Gully (450mm Dia x 915mm depth) with Class D400 straight bar hinged grating and frame. Quantity 1
 - Drainage - 150mm dia Standard Strength Vitrified Clay Pipe in trench with Type Z Bedding and Surround depth to invert <1.2m to STD STP/DR/02 Quantity 3m
 - Remove Existing Islands. Quantity - 4m²
 - Signing - 20mph Speed Limit. Diagram 670. 600mm. Quantity 12
 - Signing - 30mph Speed Limit. Diagram 670. 600mm. Quantity 12
 - New Square Pole to Erect Signs to Diagram 670 (20/30). Quantity 7
 - Existing Pole to be relocated. Erect Signs to Diagram 670 (20/30) and 1 No. Bus Lane Sign (Quantity 2)
 - Existing Street Lighting Column to Erect Signs to Diagram 670 (20/30). (Quantity 2)
 - Proposed Morpeth Ballard with Shared use Sign to Dia:956 and Ballotini Rings to STD STP/H14B (Quantity 8)
 - Proposed Morpeth Ballard with Ballotini Ring (Quantity 43)
 - Indicative Position of Traffic Signal Pole
 - Remove Existing Traffic Island Ballard Quantity 2 No
 - Lining - 20mph Speed Limit Roundel. Diagram 1065. 1.6m. Quantity 6
 - Lining - Traffic Calming Triangle. Diagram 1062. Quantity 20
 - Lining - Give Way. Diagram 1003 - 35m Diagram 1009 - 34m
 - Lining - Carriageway Centre Line (5 Marks). Diagram 1004 Quantity 120m
 - Lining - Zig Zag. Diagram 1001.3 - 190m
 - Lining - Stop Line. Diagram 1001 - 14m
 - Lining - Bus Lane. Diagram 1049A - 50m. 14 No. 1.5m High Letters
 - Lining - Bus Stop. Diagram 1025.1 - 18m
 - Lining - Metal Studs. Diagram 1055.1 - 28m
 - Lining - Double Yellow Lines. Diagram 1018.1 - 267m
 - Existing DTL to be refreshed - 20m
 - 1.6m High KEEP CLEAR Marking with top/bottom bars Dia: 1026. 2 No.

NOTE: QUANTITIES ARE SHEET SPECIFIC



STOCKPORT
METROPOLITAN BOROUGH COUNCIL
HIGHWAYS AND TRANSPORTATION
STOPFORD HOUSE
STOCKPORT SK1 3XE

MARK GLYNN
DIRECTOR OF PLACE MANAGEMENT

G	AV	PWC	11.02.25	KEEP CLEAR added
F	RPO	AV	30.10.24	Heathfield Avenue junction table extended.
E	AV	PWC	08.05.24	Post TGM DRP changes
D	AV	PWC	22.03.24	DYL added to Holly Rd as per RS42 request
C	AV	PWC	05.03.24	Blips to ZZ added, Kerbline build out extended post UTC Review
B	AV	PWC	09.01.24	3m Wide f/way on Cambridge Rd Buff blocks to be used as tactile paving
A	AV	PWC	18.12.23	Speed Limit signs added to Cambridge Lane widths amended.
Rev.	Drawn	Checked	Date	Revision Details

DETAILED DESIGN

DRAWN	AV	ENGINEER	AV	CHECKED	SEB	APPROVED	JG
DATE	19.05.23	DATE	19.05.23	DATE	22/05/23	DATE	18/12/23
SCALE	1:250						
DRAWING NUMBER	D/5203-02/0100/001-01						Revision G

JOB TITLE 5203-02 A6 CAMBRIDGE ROAD-HEATHFIELD AVE

DRAWING TITLE DEVELOPED GENERAL ARRANGEMENT SHEET 1 OF 2