


The Tracker field-to-lab replay

Combining the benefits of real-world testing and the repeatability of lab testing

The Tracker™ enables playback of motion recordings captured in real-world environments like homes. The recordings are made using octoScope's Recorder tool that runs on the fieldPal™. These recordings can be replayed in an octoBox testbed to test the performance of wireless devices. Mesh networks, stations and access points experience the walk in the testbed just as it was recorded in the real world.

The solution combines the benefits of real-world testing with the repeatability that only a controlled testing environment can deliver. The result is the speed and cost of in-the-lab testing with the confidence that the test results represent realistic end user scenarios. For a video demonstrating the power of the Tracker follow this link.

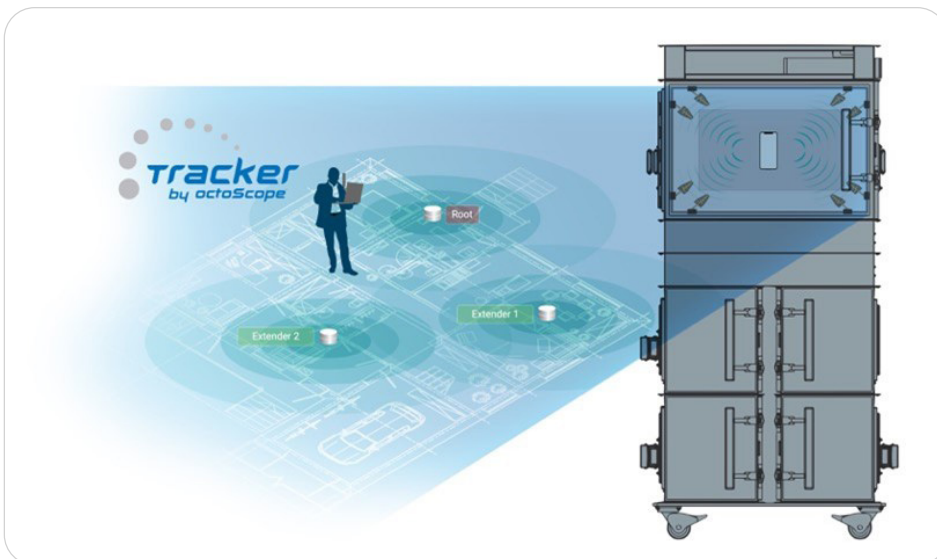

Features

- Performance tests of Access Points according to TR-398 issue 2
- Works on multiple octoBox testbeds.
- Web UI available for tests execution
- HTML reporting available for test cases

Benefits

- Measures the performance of access points against an industry standard test plan
- Provides 100% coverage for TR-398 Issue2 test plan.
- Complete isolation from outside interference to produce reliable and repeatable results

The Recorder tool running on the fieldPal captures synchronous measurements of pathloss to multiple APs along a walk path in a test house. It records the timing and the speed of the walk as well as path loss in between the APs themselves. The recordings can also be stationary corresponding to fixed locations in a house.

The recording is imported into an octoBox testbed and stored there for subsequent testing. The test engineer is able to perform any type of test available in the octoBox testbed while a virtual walk corresponding to the recording is performed in the testbed.

The system consists of three parts:

1. An octoBox STACK-MID, STACK-MAX or STACK-STA testbed or their subsets for replay of the field captures
2. A library of pre-recorded captures is included with the Tracker.
3. Recorder feature on a fieldPal test instrument (purchased separately) used during a walk to capture the dynamic environment of a house. Feature is not available yet on the fieldPal.

Use octoScope’s synchroSniffer to capture data for analysis while the test is taking place. This allows for detailed recording of any anomalous behavior observed during the testing. [Test Case Details](#)

The Tracker manipulates the attenuators in the testbed to simulate movement through a mesh network in a home. The Tracker is independent of the test case run. All of the features and testing capabilities available in the octoBox testbeds are available for testing with the Tracker. For example, a throughput test can be run while the motion profile is playing. Also, synchroSniffing can be used to observe the behavior of the mesh under test.



Figure 1: The fieldPal

Specifications

Feature	Specification
Bands supported	2.4 GHz, 5 GHz
Walk path selection	Selection available from as imported
Walk path recording	Requires fieldPal, feature not available yet
Flexible mesh network configuration during replay	Yes
Path loss synchronization between APs	Yes
Tests available during replay	All tests available in a standard octoBox testbed: throughput, latency, jitter, packet loss, handover speed
Testbeds supported	STACK-MID, STACK-MAX, STACK-STA and subsets of these testbeds
Number of simultaneous mesh nodes supported	3 maximum

Testbed Details

The Tracker is useful for testing multi node mesh systems. In the consumer market, mesh systems often come in packs of two or three. Figure 2 illustrates the STACK-MID testbed suitable for testing up to three node mesh networks. This testbed consists of four chambers: a chamber for each of the mesh nodes and one for the station. The Tracker can also be used in subsets of STACK-MID, STACK-MAX or STACK-STA.

Figure 3 and Figure 4 highlight the paths used to connect the station to the mesh under test. Figure 3 shows the paths for any station off the shelf station or STApal-open. Figure 4 shows the paths for the STApal subsystem of the smartBox-STA. Path losses for these paths are generated during replay from the captured motion profile. The testbed makes no assumptions about how the station will roam through the mesh as the motion profile is played. The testbed only reproduces the pathloss between the station and all the mesh nodes as captured in the field. Whether the station roams aggressively or acts as a sticky client can be observed in the captures. The testbed doesn't attempt to influence the station behavior in any way.

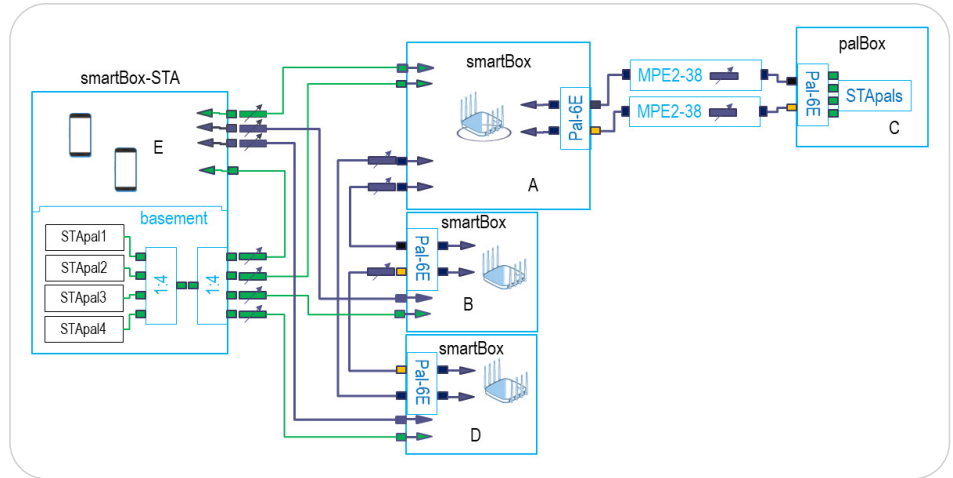


Figure 2: STACK-MAX testbed

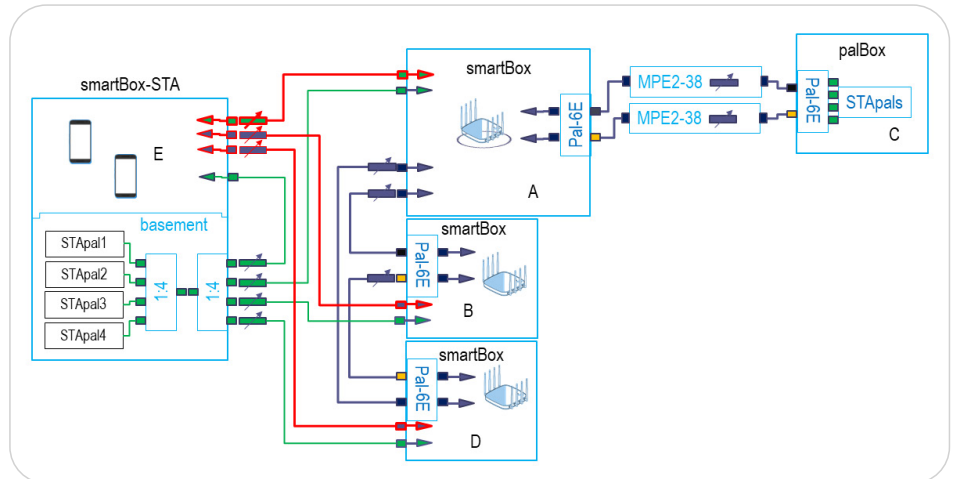


Figure 3: Fronthaul paths used in STACK-MAX when using off-the-shelf devices

Similarly, the testbed makes no assumptions about any possible steering behavior by the mesh network under test. AP steering, band steering, channel steering, 802.11k messaging, 802.11v messaging are all possible actions and are transparent to the testbed. The testbed reproduces the pathlosses of the house where the motion profile was captured and exposes the station and mesh network to the house as would have occurred in the real life when the recording was made.

Figure 5 illustrates the paths used in the testbed for backhaul in between the mesh nodes. Wired backhaul in between the nodes is also supported in the testbed. The testbed makes no assumptions about how the mesh system establishes its backhaul links in between the nodes. The testbed just reproduces the pathloss in between the access points as captured in the motion profile from the field.

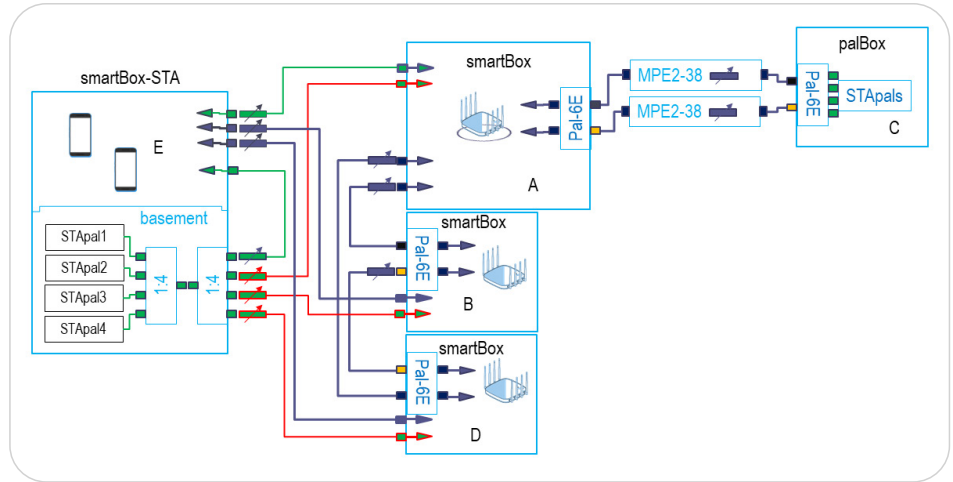


Figure 4: Fronthaul paths used in STACK-MAX when using STApals

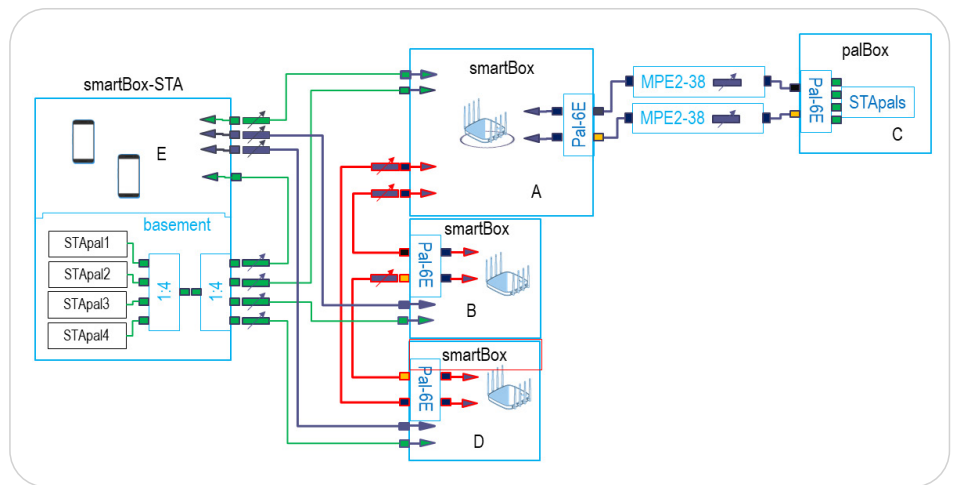


Figure 5: Backhaul paths used in STACK-MAX

About octoScope

[octoScope, a Spirent Company](#), is the market leader in automated testbeds for accurate, repeatable testing of Wi-Fi and 5G network functions and devices. Our highly-realistic, automated test suites save service providers, and device and network vendors millions in troubleshooting and customer care costs by enabling them to identify problems early in the development cycle before customers are impacted. Our patented testbed technology recreates real-world conditions in controlled testing environments to evaluate the performance of the latest Wi-Fi 6 and 6E, and 5G network equipment and devices. The combination of our solutions with Spirent's test portfolio enhances our automation and emulation capabilities, bringing even greater realism to our test suites and helping our customers innovate with unprecedented speed and efficiency.

Test Case Details

The Tracker manipulates the attenuators in the testbed to simulate movement through a mesh network in a home. The Tracker is independent of the test case run. All of the features and testing capabilities available in the octoBox testbeds are available for testing with the Tracker. For example, a throughput test can be run while the motion profile is playing. Also, synchroSniffing can be used to observe the behavior of the mesh under test.

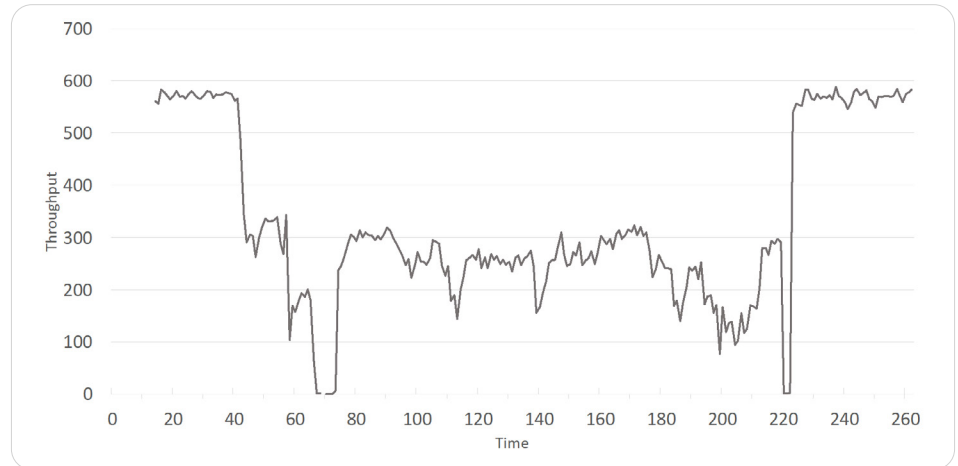


Figure 6: Example outcome of a throughput test while a motion profile was replayed in an octoBox testbed

About Spirent Communications

Spirent Communications (LSE: SPT) is a global leader with deep expertise and decades of experience in testing, assurance, analytics and security, serving developers, service providers, and enterprise networks. We help bring clarity to increasingly complex technological and business challenges. Spirent's customers have made a promise to their customers to deliver superior performance. Spirent assures that those promises are fulfilled. For more information visit: www.spirent.com

sales@octoScope.com
www.octoscope.com
+1-978-222-3114

octoScope
305 Foster Street | Littleton, MA 01460
+1-978-222-3114

octoScope
780 Montague Expressway | San Jose, CA 95131
+1-408-888-0478