

Westlink Industrial Estate, Kemps Creek

Water and Stormwater Management Plan Stage 2

ESR Development (Australia) Pty Ltd

SEPTEMBER 2025

20-748

Commercial in Confidence

All intellectual property rights, including copyright, in designs developed and documents created by AT&L remain the property of this company. Any use made of such design or document without the prior written approval of AT&L will constitute an infringement of the rights of the company which reserves all legal rights and remedies in respect of any such infringement.

The information, including any intellectual property, contained in this proposal is confidential and proprietary to the Company. It may only be used by the person to whom it is provided for the stated purpose for which it is provided and must not be imparted to any third person without the prior written approval of the Company. The Company reserves all legal rights and remedies in relation to any infringement of its rights in respect of its confidential information.

This report has been prepared in accordance with the terms and conditions of appointment. AT&L cannot accept any responsibility for any use of or reliance on the contents of this report by any third party.

This report may be based upon information supplied by other consultants and contractors. To the extent that the report incorporates such material, AT&L takes no responsibility for any loss or damage caused by any error or omission arising from reliance on it.

Document Registration

Document Title	Westlink Industrial Estate – Civil Infrastructure & Water Management Strategy Stage 2
Document File Name	R009-08-20-748-Stage 2 Water and Stormwater Management Plan.docx
Section	Civil
Document Author	Andrew Tweedie

Issue	Description	Date	Author	Checked	Approved
01	Issued for Review	12/09/23	Andrew Tweedie	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
02	Final Issue	28/09/23	Andrew Tweedie	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
03	Final Issue	05/10/23	Andrew Tweedie	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
04	Final Issue	13/10/23	Andrew Tweedie	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
05	Final Issue	16/08/24	Andrew Tweedie	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
06	Final Issue	29/01/25	Andrew Tweedie	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
07	Final Issue	31/07/25	Andrew Tweedie	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
08	Final Issue	08/09/25	Andrew Tweedie	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>

Contents

1.	Introduction	5
1.1.	Site Description	5
1.2.	Supporting Documentation.....	6
2.	Site Characteristics	7
2.1.	Existing Topography and Catchments	7
2.2.	Existing Drainage Lines.....	9
2.3.	Existing Geology	11
2.4.	Post-Development Catchment Extents	12
3.	Stormwater Drainage	13
3.1.	Stormwater Drainage Design Criteria	13
3.2.	Proposed Site Stormwater Drainage.....	13
3.3.	Trunk Drainage Infrastructure	13
3.4.	Downstream Culvert Hydraulics	15
4.	Water Management Strategy	16
4.1.	Water Management Strategy Objectives and Controls	16
4.2.	Water Management Strategy Overview	22
4.2.1.	Technical Guidance for achieving Wianamatta-South Creek stormwater management targets..	24
4.3.	Hydrological and Hydraulic Modelling	25
4.4.	Stormwater Quality Modelling	26
4.5.	Proposed Stormwater Management Measures.....	27
4.5.1.	Gross Pollutant Traps	27
4.5.2.	Detention Tanks	27
4.5.3.	Erosion and Sediment Basins (acting as evaporation ponds).....	28
4.5.4.	Stormwater Harvesting for Irrigation	29
4.5.5.	Rainwater Tanks	29
4.5.6.	Passively Irrigated Street Trees	29
4.5.7.	Atlan Vortceptor Gross Pollutant Traps	30
4.6.	Scenario Modelling	31
4.7.	Performance against stormwater quality targets	33
4.8.	Performance against stormwater quantity targets	34
4.9.	Performance against stormwater runoff volume targets	35
4.10.	Ongoing Management and Maintenance	36
5.	Site Water Balance	37
5.1.	Water Balance Overview.....	37
5.2.	Water Requirements.....	37
5.3.	Water Sources.....	37

5.4. Water Use Minimisation	37
6. Overland Flow Flooding	38
7. Inspection and Maintenance Plan.....	40
7.1. Maintenance and Operations	40
7.2. Monitoring	41
7.3. Reporting and Auditing	41
8. Contingency Management	42
9. Lifecycle Costs	44
9.1. OSD Basin	44
9.2. Proprietary Stormwater Treatment Devices	45
9.3. Pumping and Landscape Irrigation System	45
APPENDIX 1 – CIVIL DRAWINGS	
APPENDIX 2 – STORMWATER HYDROLOGY SUMMARY	
APPENDIX 3 – INSPECTION, MAINTANCE AND OPERATIONS GUIDELINES	

Figures

Figure 1: Site Extent (imagery from nearmap, dated 17 February 2022)	5
Figure 2 - Estate Plan Stage 2	6
Figure 3: Catchment extents under existing conditions	7
Figure 4: Topographic mapping showing drainage lines in the vicinity of the site (Source: NSW SIX Maps)	9
Figure 5: Extract of waterway mapping (CT Environmental, April 2020)	10
Figure 6: Field validated flow paths and watercourses within and downstream of the site	11
Figure 7: Catchment extents under proposed conditions	12
Figure 8: Trunk drainage infrastructure identified in the Mamre Road Precinct DCP	14
Figure 9 - Mamre Road Precinct Stormwater Scheme Plan (2024)	15
Figure 10 - Extract from Technical Guidance	24
Figure 11: Post-development MUSIC model layout (Stage 2 Arrangement)	31
Figure 12: Flow duration curve for the proposed stormwater management measures	35
Figure 13 : Extract of flood planning land map (Penrith LEP 2010)	38
Figure 14: 1% AEP flood depth from local catchments under existing conditions (Sydney Water, 2020)	39
Figure 15 - Lifecycle Costs from Landcom	44

Tables

Table 1: Description of internal and external catchments under existing conditions	8
Table 2: Response to DCP controls relating to water management	16
Table 3: Proposed water management measures under the Estate and Regional Arrangements	23
Table 4: Rainfall-runoff parameters adopted in MUSIC.....	26
Table 5: Stormwater quality parameters for MUSIC source nodes	27
Table 6 : Key Lot 6 Detention Tank & Reuse tank parameters and Drains model results.....	28
Table 7: Adopted estate-wide pond parameters	29
Table 8: Summary of reuse tank parameters under the Stage 2 Arrangement	29
Table 9: Music Modelling Catchments	32
Table 10: Post-development scenario land use breakdown under the Interim Arrangement	32
Table 11: Summary of MUSIC modelling results against stormwater quality targets (kg/ha/year)	33
Table 12: Pre-development and post-development peak flow rates (Interim and Ultimate Arrangements)	34
Table 13: Summary of MUSIC model results against stormwater flow targets (Interim Arrangement).....	35
Table 14 - Inspection and monitoring requirements	40
Table 15 - Contingency measures relating to operational stormwater management	42

1. Introduction

This Water and Stormwater Management Plan (WSMP) has been prepared by AT&L on behalf of ESR Australia in support of a State Significant Development Application (SSD-46983729) for the proposed development of the site located at 1030-1064 Mamre Road Aldington Road and 59-63 Abbots Road, Kemps Creek (the Site). This SSD builds on the Stage 1 approval SSD-9138102. Combined both these SSD's form the entire Westlink Industry Park.

1.1. Site Description

The extent of the site is presented in **Figure 1**.

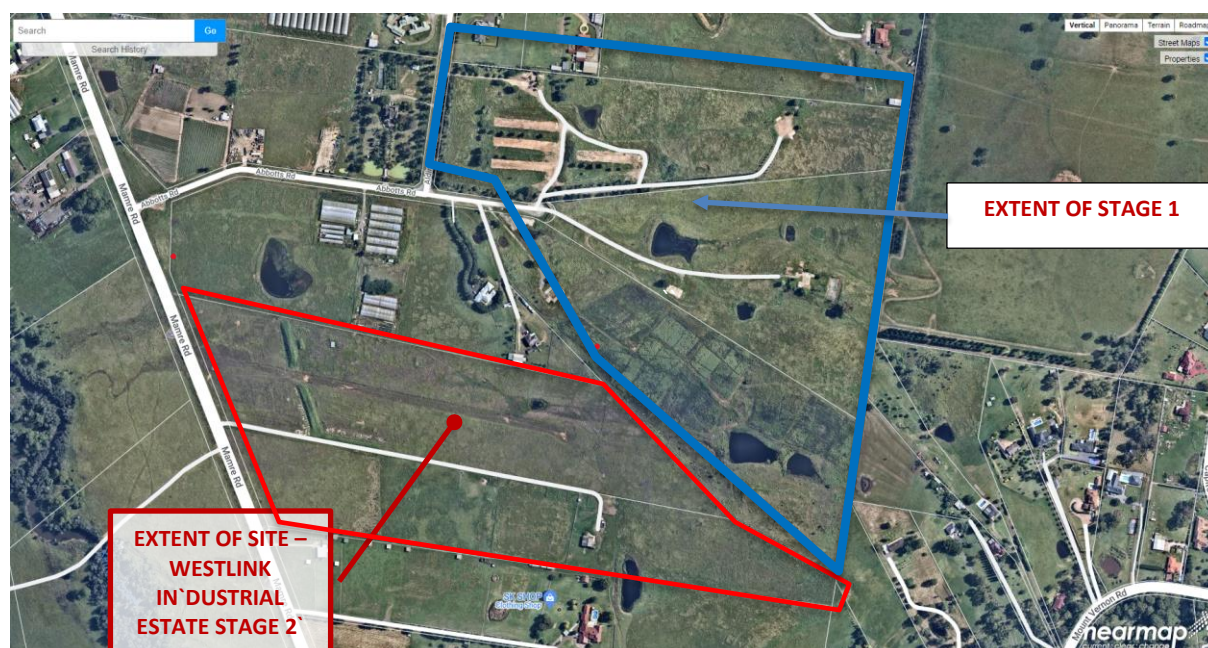


Figure 1: Site Extent (imagery from nearmap, dated 17 February 2022)

The site is located in the suburb of Kemps Creek, within the Penrith Local Government Area (LGA), and approximately 15 km south-east of the Penrith CBD and 5 km north-east of the under-construction Western Sydney Airport. The site is made up of the following allotments:

- Lots 3 and 4 DP250002 (1030-1064 Mamre Road, Kemps Creek)
- Lots 11 and 13 DP253503 (59-63 Abbots Road, Kemps Creek)

The total area of the site is approximately 53.6 hectares.

Stage 1 SSD approval contains bulk earthworks, servicing and construction of Warehouse 1 and 3. Total work area is approximately 11.72Ha.

The proposed works associated for this Stage 2 SSD application is as follows and referenced in **Figure 2**:

- Construction of extension of Abbots Road from Stage 1 extents to southern boundary
- Construction of Aldington Road extension to southern boundary
- Construction of private road north of Lot 6 linking Aldington Road with Abbots Road extension
- Development of Lot 6 (Bulk earthworks of Lot approved under a different application CDC AT&L Drawings 20-748 C30000 series)
- Bulk earthworks and associated retaining walls within Lots 6, 4 and Lot 5

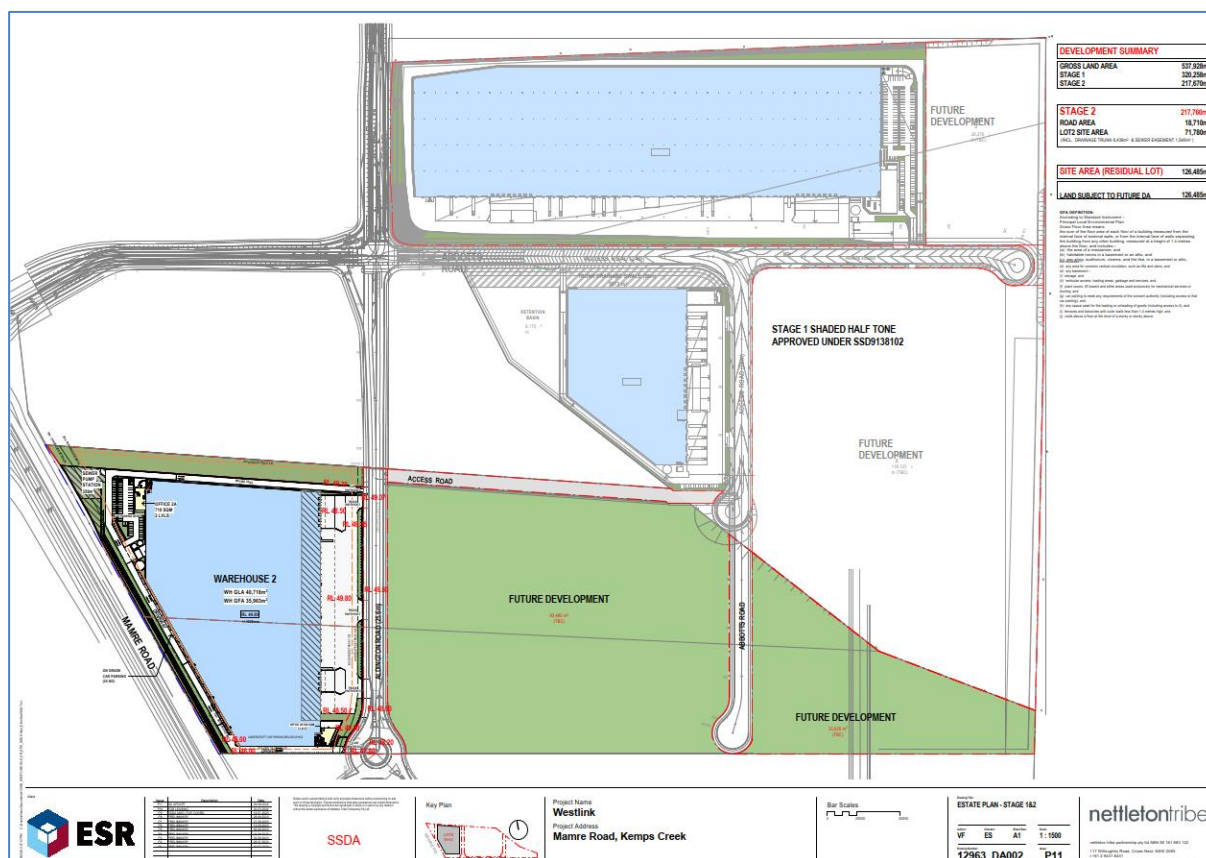


Figure 2 - Estate Plan Stage 2

The site is currently characterised as rural land and comprises residential dwellings, agricultural areas, sheds, greenhouses and some farm dams.

In June 2020, the site was rezoned IN1 – General Industrial under the State Environmental Planning Policy (Western Sydney Employment Area) 2009. The site is also located in the Mamre Road Precinct and is therefore subject to controls outlined in the Mamre Road Precinct Development Control Plan 2021.

1.2. Supporting Documentation

The following documentation is referred to throughout and should be read in conjunction with this report:

- Civil Drawings (AT&L), 20-748-C5000 (Infrastructure) and C6000 (on-lot) series – refer to **Appendix 1**.
- Stormwater Management Layout Plan 20-748-C11075 in **Appendix 1**
- Pre-Development hydrology parameters and assumptions letter (LTR007-02)- refer to **Appendix 2**
- Life Cycle Costings, and O&M Manuals from Landcom & Atlan - refer to **Appendix 3**
- Trunk Drainage Drawings and associated report by J.Wyndham Prince
- Westlink Industrial Estate Kemps Creek- Stage 2 flood Impact & Risk Assessment Report- Jan 2025 prepared by J Wyndham Prince

2. Site Characteristics

2.1. Existing Topography and Catchments

The Site in its existing condition is characterised by undulating topography. The ground slope across most of the site has a general fall from the east to west towards Mamre Road with existing levels ranging from RL98 in the south-east, RL 93 in the north-east, RL 42.5 in the south and west adjacent Mamre Road.

The eastern portion of the site consists of four ridgelines that are generally aligned in an east-west direction. Ground slopes off these ridgelines towards local gullies within the site are typically between 10% and 15%. The western portion of the site adjacent to Aldington Road and Abbotts Road is generally flatter than the eastern portion, with ground slopes typically in the range of between 2% and 8%.

Most of the site in its existing condition is pervious, other than some residential dwellings, sheds and access driveways.

Delineation of the existing internal drainage catchments and external catchment that drain through the site is presented as **Figure 3**. Note that this includes the existing conditions before the commencement of Stage 1 works.

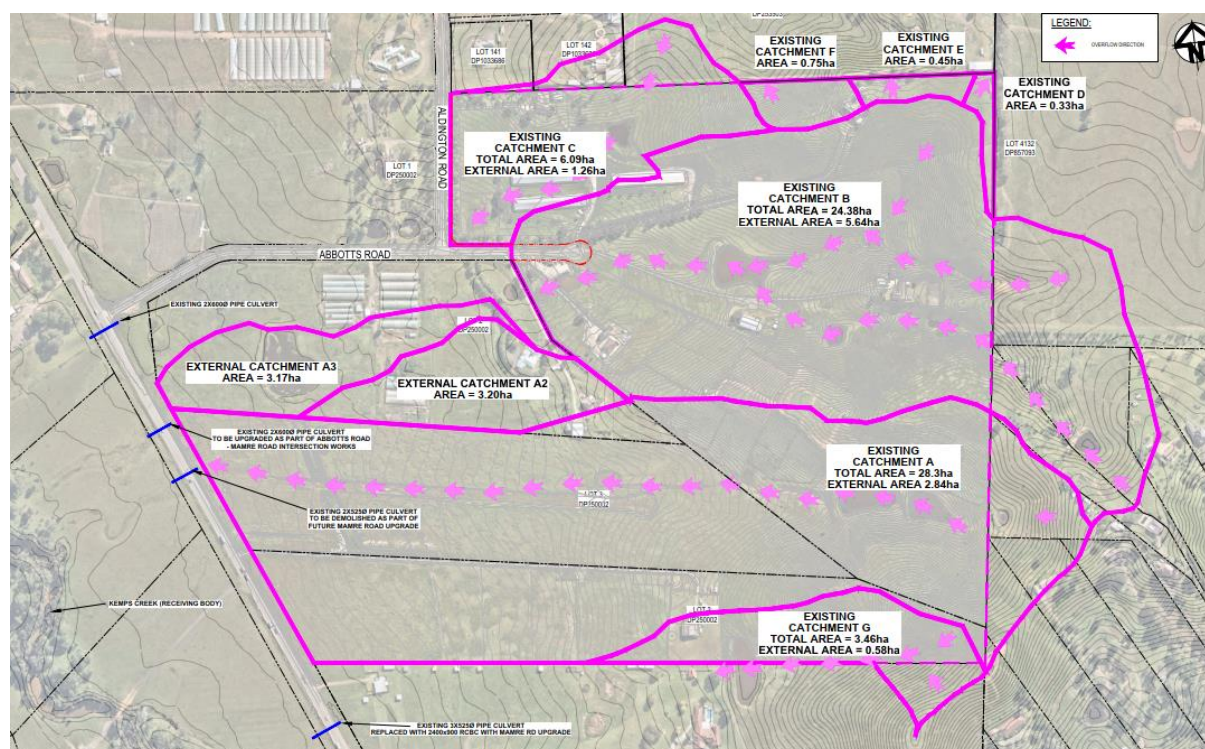


Figure 3: Catchment extents under existing conditions

A summary of the internal catchments under existing conditions is presented in **Table 1**.

Table 1: Description of internal and external catchments under existing conditions

Catchment ID	Area (ha)	Description
A	28.82	Discharges towards Mamre Road via residual land 1030-1064 Mamre Rd.
A2	3.20	Sheet flow into the ESR site, then joining catchment A.
A3	3.17	Sheet flow into the ESR site, and discharge from the existing farm dam, then joining catchment A.
B	24.38	Discharges towards the eastern boundary of 1016-1028 Mamre Road (Lot 2 DP250002) and ultimately into a catch drain that runs along the southern edge of Abbotts Road.
C	6.09	Discharges towards the intersection of Abbotts Road and Aldington Road.
D	0.33	Discharges in a north-easterly direction towards 19-105 Capitol Hill Drive Mount Vernon (Lot 4132 DP857093)
E	0.45	Discharges in a northerly direction towards 272 Aldington Road (Lot 15 DP253053)
F	0.75	
G	3.46	Discharges into a shared existing farm dam, which overflows into the 1066-1074 Mamre Rd property to the south.

There is currently no formal trunk stormwater infrastructure within the site.

2.2. Existing Drainage Lines

Based on large-scale topographic mapping (1:25,000 from NSW Six Maps), there is one mapped overland drainage line within the site, refer to **Figure 4**.

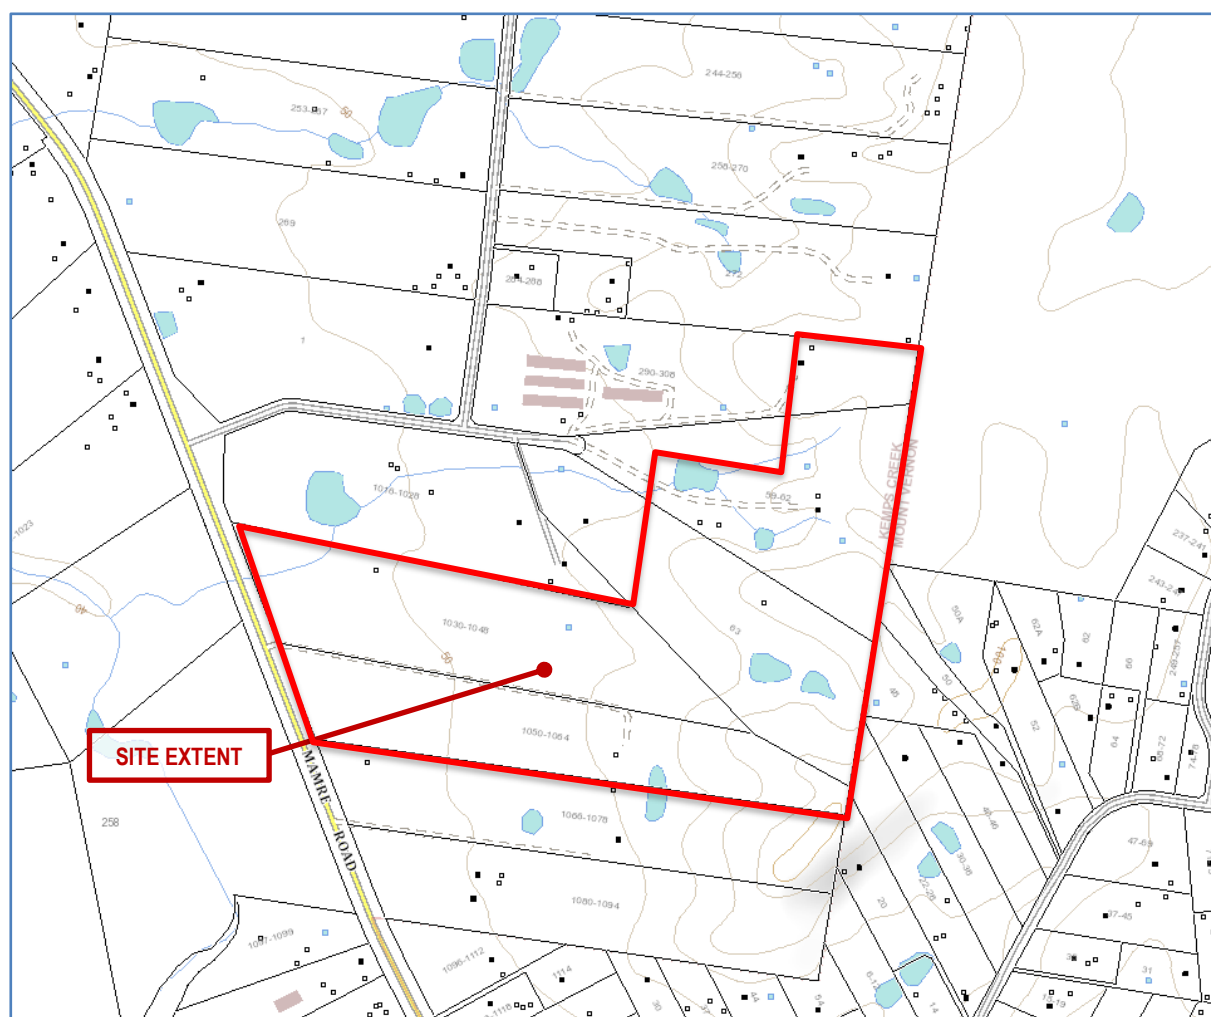


Figure 4: Topographic mapping showing drainage lines in the vicinity of the site (Source: NSW SIX Maps)

The *Mamre Road Precinct Waterway Assessment* (CT Environmental, April 2020), contained in the *Mamre Road Flood, Riparian Corridor, and Integrated Water Cycle Management Strategy* (Sydney Water, October 2020) presents the extents of waterways in the Mamre Road Precinct that have been the subject of a desktop review and field assessment to confirm the presence of mapped and unmapped waterways. An extract of mapping showing the extents of waterways in the Mamre Road Precinct is presented as **Figure 5**. This shows an unnamed tributary of Kemps Creek passing through the site.

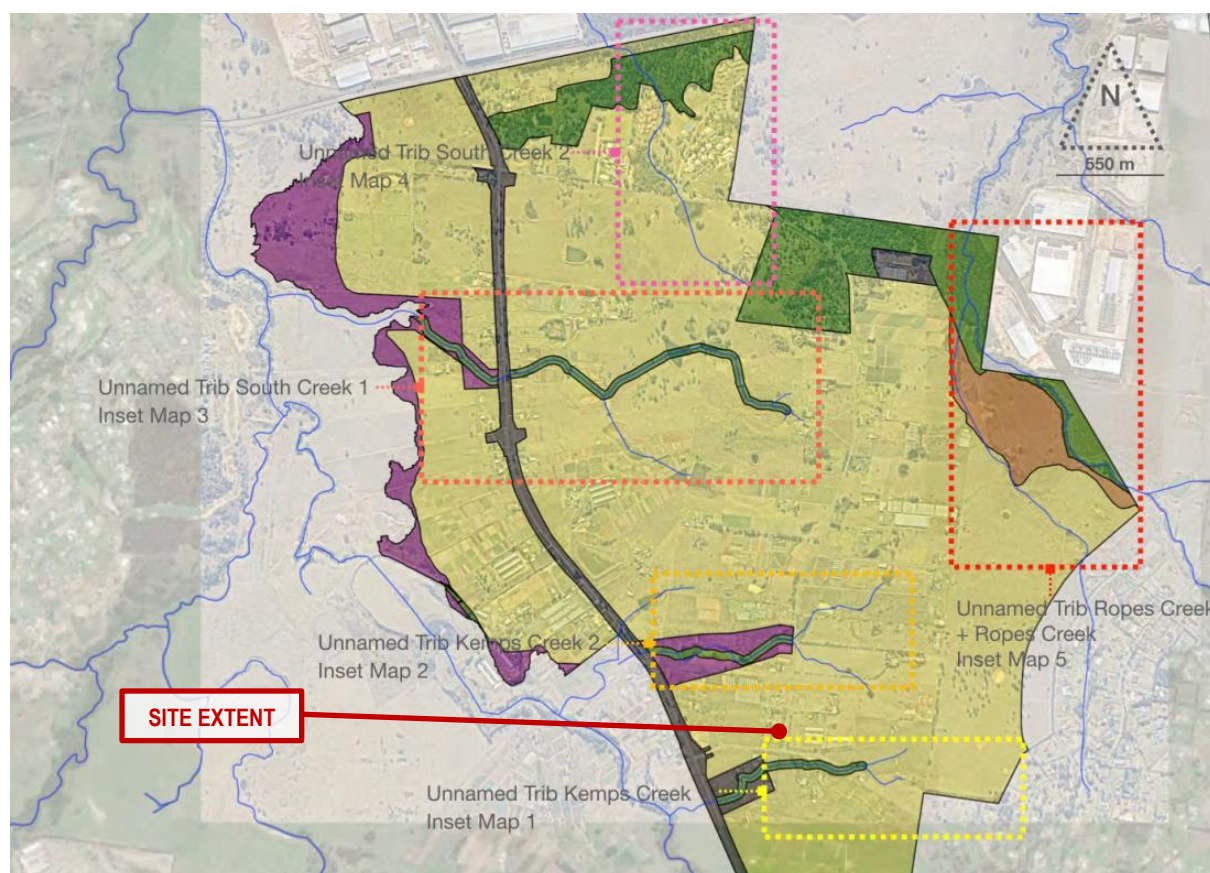


Figure 5: Extract of waterway mapping (CT Environmental, April 2020)

Results of the inspection of the unnamed tributary of Kemps Creek are described in the *Mamre Road Precinct Waterway Assessment* (CT Environmental, April 2020), and are summarised below:

- Two first order watercourses were evident in the headwaters which run to the north and south of the recently demolished house on 59-62 Abbots Road.
- A clear flow path was evident below the confluence of the two first order watercourses, which validated the presence of a second order watercourse.
- The flow path did not have defined bed and banks, likely due to the presence of three upstream farm dams.
- From a point approximately 200 metres downstream (west) of the confluence of the first order watercourses, the flow path was observed to be heavily modified and formed into a drainage channel that runs parallel to and on the southern side of Abbots Road. The flow path continues to Mamre Road.
- The section of mapped watercourse downstream of the Westlink Industrial Estate Stage 1, and passing through Stage 2, was not present, refer to **Figure 6**.
- Due to the lack of vegetation along the upper section of the headwater and significant modification to the drainage channel in the lower section, the watercourse had minimal ecological value.



Figure 6: Field validated flow paths and watercourses within and downstream of the site

2.3. Existing Geology

Based on the Preliminary Geotechnical Investigation undertaken by Douglas Partners (reference: 92352.00, dated August 2019) for 59-63 Abbotts Road and the Geotechnical Investigation Report prepared by Alliance Geotechnical (reference: 9687-GR-1-1, dated October 2019) for 290-308 Aldington Road, the following inferred sub surface soils were encountered across the site:

- TOPSOIL / topsoil filling to depths of 0.1 - 0.6m
- FILL to depths of 2.3m over parts of the site
- Residual Soil – variably stiff to hard silty clay, to depths in the range 2.5-3.5m
- BEDROCK - initially extremely low to very low strength shale or sandstone at first contact at depths of 0.7

2.4. Post-Development Catchment Extents

A post-development catchment plan based on the proposed site grading is presented as **Figure 7**.

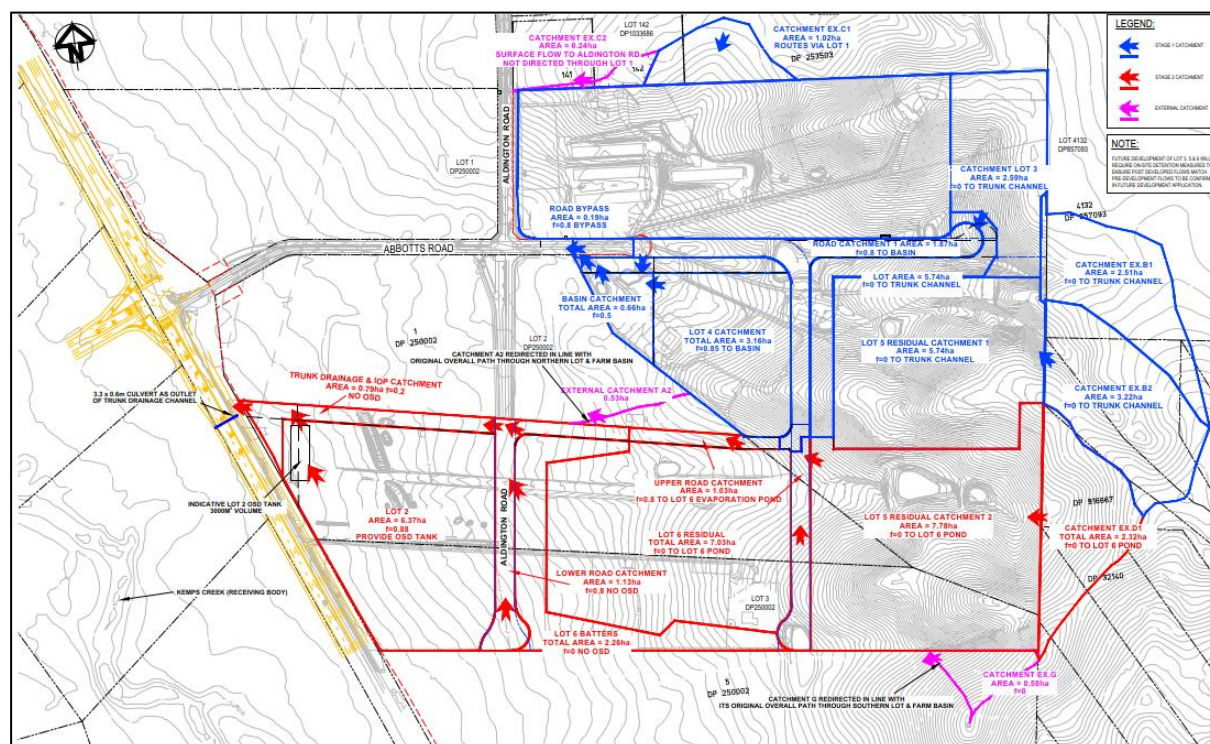


Figure 7: Catchment extents under proposed conditions

The post developed catchment extents are proposed to drain to the existing culvert beneath Mamre Road in the northwest corner of Stage 2 site as per **Figure 7**. It is noted the existing culverts beneath Mamre Road are scheduled to be completed in advance of the Westlink stage 2 development.

Prior to draining through the culvert beneath Mamre Road, the Stage 2 catchment is proposed as such:

- The Trunk Drainage & Sewer IOP easements bypass all OSD and treatment, draining directly into the downstream culvert
- Developed Lot 6 (western Lot) – drains via a proposed underground OSD tank with orifice outlet and proprietary treatment within the western portion of the lot to drain into the 19.2m open trunk drainage channel along the north of Lot 6
- Lots 5 and southern half of Lot 4 (both bulk surface only), and the southern portion of Abbots Road to drain into an evaporation pond on Lot 5, then discharging into the open trunk drainage channel via GPT unit.
- The lower road catchment including Aldington Rd and a number of batters from lot 5 drain into the trunk drainage channel via a GPT unit.
- Lot 2 and northern portion of Lot 4 (both bulk surface only) to drain into the stage 1 trunk drainage channel (as per the Stage 1 stormwater management plan)
- Undeveloped External catchment to east to drain via lot 5 as surface flows.

Once Lot 4 and Lot 5 and the eastern external catchments are developed, detention and gross pollutant treatment measures within each site will be required to be implemented to ensure peak post flows into the open channel do not exceed the pre-developed flows and quality requirements. This will need to be determined as part of the Development Applications on each of these lots. As such the open trunk drainage channel is designed for pre-developed flow rates.

3. Stormwater Drainage

3.1. Stormwater Drainage Design Criteria

Design criteria and requirements for the proposed site stormwater management and stormwater drainage are outlined in the following documents:

- AS 3500.3 – Plumbing and drainage – Stormwater drainage
- Commonwealth of Australia (Geoscience Australia), *Australian Rainfall and Runoff: A guide to flood estimation*, 2019.
- NSW Department of Planning, Industry and Environment (DPIE), *Mamre Road Precinct Development Control Plan 2021*.
- NSW Department of Planning, Industry and Environment (DPIE), *MUSIC Modelling Toolkit – Wianamatta*, 2 August 2021.
- Penrith City Council, *Design Guidelines for Engineering Works for Subdivisions and Developments*, as amended 20 November 2013.
- Penrith City Council, *Water Sensitive Urban Design (WSUD) Policy*, December 2013.
- Penrith City Council, *WSUD Technical Guidelines*, Version 4 – October 2020.

3.2. Proposed Site Stormwater Drainage

The proposed drainage network within the estate has been designed to safely convey major and minor flows prior to discharging to neighbouring properties to the south and west. The following criteria have been adopted for the proposed drainage system:

- Major system (pit and pipe network, overland flow paths and channels): 1% AEP
- Minor system (pit and pipe network): minimum 5% AEP and increased where required to address major system design requirements.
- Flood Impacts from external catchments are to be minimised to an acceptable level for all floods up to the PMF.

The minor system stormwater drainage has been designed to drain towards the culvert crossing beneath Mamre Road in the northwest corner of the site. Limited road overland flow paths discharge into the southern property or Mamre Rd verge when exceeding the minor drainage system capacity.

3.3. Trunk Drainage Infrastructure

The *Mamre Road Precinct DCP* includes indicative locations of trunk drainage infrastructure across the precinct, refer to **Figure 8**. A 25m trunk drainage line is situated within the ESR Westlink Stage 2 site, which would drain in a westerly direction to Mamre Road. J. Wyndham Prince (JWP) has investigated the hydraulics and spatial design of the open trunk drainage channel in stage 2.

Confirmation has been received in discussions with Sydney Water in August 2023 that the naturalized trunk drainage channel within the development can be reduced in width from 25m (as per the Precinct DCP) to 19.2m and length to solely be located along the northern boundary between the Aldington Road extension at the east and Mamre Road to the west.

As such all documentation refers to the naturalized trunk drainage channel being 19.2m wide. This open channel is to form the naturalized trunk drainage network as per the DCP and the Mamre Road Precinct Stormwater Scheme Plan (**Figure 8**). Refer to JWP Channel Drawings for location and extents of open trunk drainage channel.

At the time of writing this report there is no detailed design of this stormwater naturalized trunk drainage channel provided by SWC to the west of Mamre Road and into the proposed Regional Wetland 17 as indicated in **Figure 9 – Mamre Road Precinct Stormwater Scheme Plan**.

It is assumed construction of the open trunk drainage channel within the Westlink Estate will occur prior to construction of the Regional Wetland and associated channel west of Mamre Road. As such outlet flows into the culvert beneath Mamre Road will be modelled to ensure pre-developed peak flows are not exceeded and existing flow paths west of Mamre Road are maintained.

The future downstream culvert as part of the Mamre Road upgrade is understood to be capable of conveying the entire Westlink Estate stage 2 catchment at pre-developed flows (but excludes the external catchments). The culvert requires re-alignment to the updated trunk drainage alignment. This has been formally accepted by Sydney Water. Design of the culvert as part of the Aldington/Abbotts Rd Intersection upgrade is still underway and may be updated prior to construction of Stage 2, however, they will maintain the Sydney Water culvert design including flow rates.

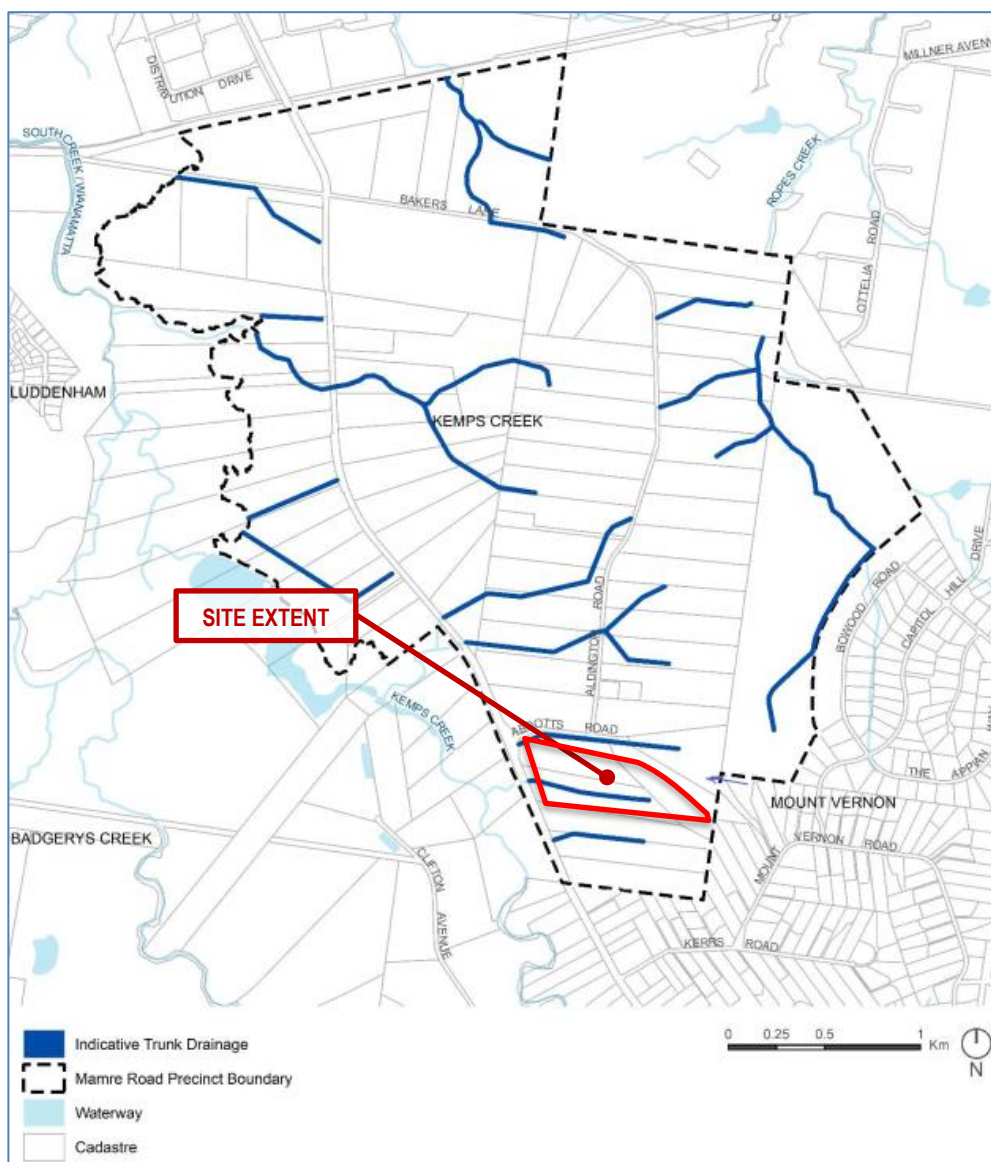


Figure 8: Trunk drainage infrastructure identified in the Mamre Road Precinct DCP

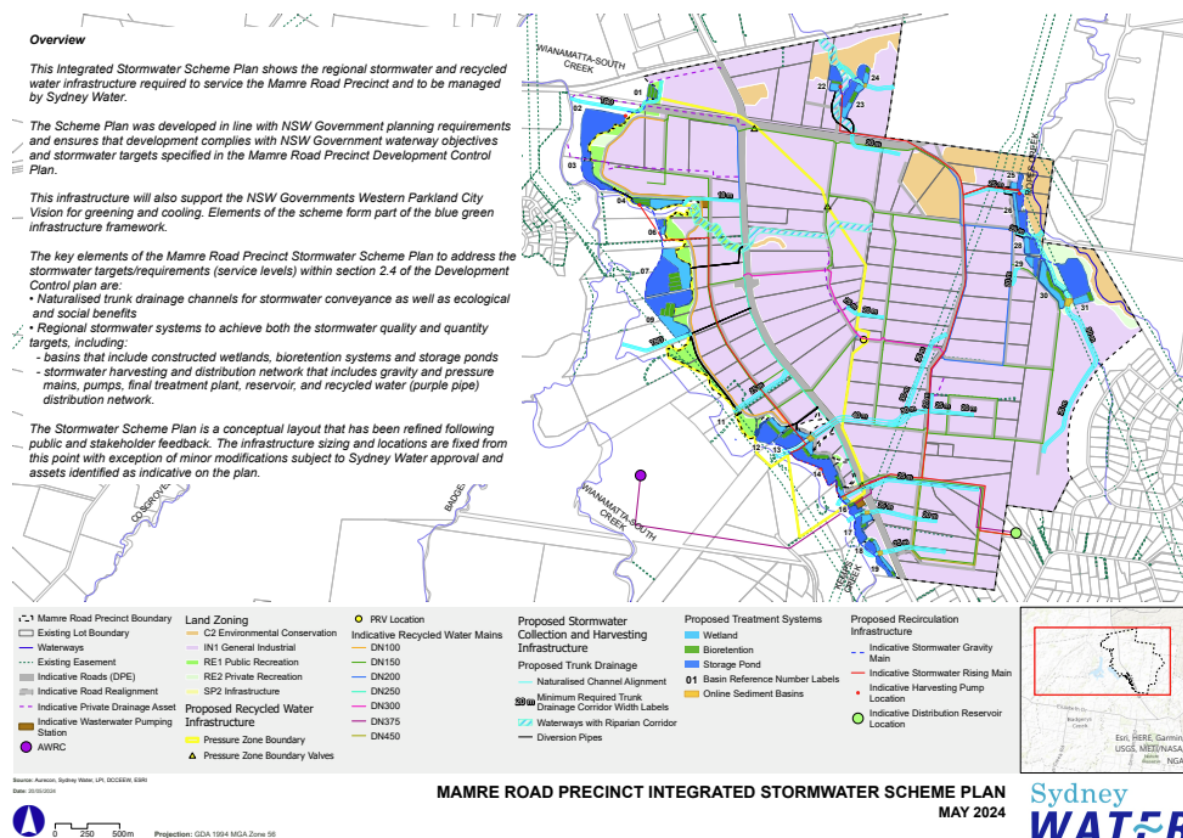


Figure 9 - Mamre Road Precinct Stormwater Scheme Plan (2024)

3.4. Downstream Culvert Hydraulics

As of January 2025, the downstream culvert from the stage 2 open channel (at Mamre Road) is still in the detailed design process with TfNSW. It is understood that the culvert sizing is a 0.75m x 3.3m culvert at IL41.788 has been assumed. This provides a 1% AEP tailwater level for design of RL 43.13 at the Lot 6 outlet (as per JWP flood modelling).

4. Water Management Strategy

This section summarises the proposed water management strategy for the site, including details of the proposed stormwater management measures and characterisation of water quality, quantity and flow volume at the points of discharge at the site boundary against the controls outlined in the Mamre Road Precinct DCP.

4.1. Water Management Strategy Objectives and Controls

The main objectives pertaining to the management of stormwater within the proposed development site are outlined in Section 2.4 of the Mamre Road Precinct DCP. Controls relating to stormwater quantity management and the requirement to attenuate peak flow rates are outlined in Section 2.5 of the DCP.

Specific controls relating to water management, as well as a response to these controls, is summarised below in **Table 2**.

Table 2: Response to DCP controls relating to water management

DCP Controls	Response
Waterway health and Water Sensitive Urban Design	
1) Development applications must demonstrate compliance with the stormwater quality targets in Table 4 (DCP) and the stormwater flow targets during construction and operation phases in Table 5 (DCP) and Table 6 (DCP) at the lot or estate scale to ensure the NSW Government's waterway objectives (flow and water quality) for the Wianamatta-South Creek catchment are achieved (see Appendix D). Where the strategy for waterway management is assessed at an estate level, the approval should include for individual buildings within the estate, which may be the subject of future applications.	<p>Performance of the proposed water management strategy against the stormwater quality targets is presented in Section 4.2.</p> <p>Performance against the construction phase stormwater flow & quality targets is shown indicatively in plan 20-748-C5201 noting that contractors are to create their own plan detail for construction. A CPESC has revised the plan and confirms the detail in the documentation is sufficient for the SSD.</p> <p>Performance of the proposed water management strategy against the operational stormwater flow targets is presented in Table 13, which includes measures for Lot 6 Warehouse under the interim arrangement. The strategy is also demonstrated on plan 20-748-C5220.</p>
2) The stormwater flow targets during operation phase (Table 5) include criteria for a mean annual runoff volume (MARV) flow-related option and a flow duration-related option. Applicants must demonstrate compliance with either option.	<p>Performance of the proposed water management strategy against the operational stormwater flow targets is presented in Table 13. Option 1 has been satisfied.</p>
3) Development applications must include a Water Management Strategy (WMS) detailing the proposed Water Sensitive Urban Design (WSUD) approach, how the WMS complies with stormwater targets (i.e., MUSIC modelling), and how these measures will be implemented, including ongoing management and maintenance responsibilities. Conceptual designs of the stormwater drainage and WSUD system must be provided to illustrate the functional layout and levels of the WSUD systems to ensure the operation has been considered in site levels and layout.	<p>The Water Management Strategy for the site is outlined in Section 4, and includes the approach to WSUD for the site, performance of the proposed stormwater management measures against the DCP targets, and description of delivery, ongoing management and maintenance of each proposed measure.</p> <p>Design drawings showing the layout and levels of the proposed stormwater management elements are included in the AT&L civil package.</p>
4) The design and mix of WSUD infrastructure shall consider ongoing operation and maintenance. Development applications must include a detailed	<p>Ongoing management and maintenance considerations are addressed in Section 4.10.</p>

DCP Controls	Response
<i>lifecycle cost assessment (including capital, operation/maintenance, and renewal costs over 30 years) and Maintenance Plan for WSUD measures.</i>	All costs associated with the delivery, operation and maintenance of the estate-based water management measures will be borne by the proponent.
<i>5) WSUD infrastructure may be adopted at a range of scales (i.e., allotment, street, estate, or sub-precinct scale) to treat stormwater, integrate with the landscape and maximise evaporative losses to reduce development flow runoff. Vegetated WSUD measures, naturalised trunk drainage and rainwater/stormwater reuse are preferred. Acceptable WSUD measures to retain stormwater within the development footprint and subdivision are shown in Table 7 (DCP).</i>	A summary of the proposed WSUD infrastructure adopted in the water management strategy is presented in Table 3 .
<i>6) Development must not adversely impact soil salinity or sodic soils and shall balance the needs of groundwater dependent ecosystems.</i>	Refer to Geotechnical Investigation Reports prepared by Douglas Partners (for 59-63 Abbotts Road) and Alliance Geotechnical (for 290-308 Aldington Road) for details of soil salinity, sodicity and groundwater.
<i>7) Infiltration of collected stormwater is generally not supported due to anticipated soil conditions in the catchment. All WSUD systems must incorporate an impervious liner unless a detailed Salinity and Sodicity Assessment demonstrates infiltration of stormwater will not adversely impact the water table and soil salinity (or other soil conditions).</i>	The proposed water management strategy does not incorporate infiltration of collected stormwater.
<i>8) Where development is not serviced by a recycled water scheme, at least 80% of its non-potable demand is to be supplied through allotment rainwater tanks.</i>	Refer to Section 4.5.5 for details of proposed rainwater tanks and demand statistics.
<p><i>9) Where a recycled water scheme (supplied by stormwater harvesting and/or recycled wastewater) is in place, development shall:</i></p> <ul style="list-style-type: none"> ■ <i>Be designed in a manner that does not compromise waterway objectives, with stormwater harvesting prioritised over reticulated recycled water;</i> ■ <i>Bring a purple pipe for recycled water to the boundary of the site, as required under Clause 33G of the WSEA SEPP. Not top up rainwater tanks with recycled water unless approved by Sydney Water; and</i> ■ <i>Design recycled water reticulation to standards required by the operator of the recycled water scheme.</i> 	<p>Stormwater harvesting in the form of rainwater tanks on proposed Lot 6 will not be incorporated.</p> <p>Refer to Section 4.5.5</p>
Trunk Drainage Infrastructure	

DCP Controls	Response
10) Indicative naturalised trunk drainage paths are shown in Figure 4 (DCP)	Reproduced in this report for context as Figure 8 .
<p>11) Naturalised trunk drainage paths are to be provided when the:</p> <ul style="list-style-type: none"> ■ Contributing catchment exceeds 15ha; or ■ 1% AEP overland flows cannot be safely conveyed overland as described in Australian Rainfall and Runoff – 2019; <p>unless otherwise agreed by the consent authority.</p>	<p>Details of the proposed trunk drainage infrastructure are included in Section 3.3.</p>
12) The design and rehabilitation of naturalised trunk drainage paths is to be generally in accordance with NRAR requirements (refer to Section 2.3) that replicates natural Western Sydney streams. An example of a naturalised trunk drainage path is shown in Figure 3.	<p>Based on discussions with Sydney Water there is no detailed design on the naturalised trunk channel downstream of the Estate. It is proposed at detailed design to coordinate with Sydney Water on the design and rehabilitation of the naturalised trunk drainage channel to match into any downstream open channels. This must also be co-ordinated with TfNSW for the culvert connection across Mamre Road.</p>
<p>13) Naturalised trunk drainage paths shall be designed to:</p> <ul style="list-style-type: none"> ■ Contain the 50% AEP flows from the critical duration event in a low flow natural invert; ■ Convey 1% AEP flows from the critical duration event with a minimum 0.5m freeboard to applicable finished floor levels and road/driveway crossings; and ■ Provide safe conveyance of flows up to the 1% AEP flood event. 	<p>The alignment of the naturalised trunk drainage has been altered with the approval of Sydney Water. The naturalised trunk drainage path is now along the northern boundary of Lot 6 which was deemed to not compromise the objectives of the trunk drainage, while assisting in preferred layouts of the industrial development.</p> <p>As described above, trunk drainage infrastructure in the form of a 19.2m wide open channel along the northern boundary between Aldington Road extension and Mamre Road is proposed as the naturalised trunk drainage path.</p> <p>This system will have sufficient capacity to capture and convey flows up to or exceeding the 1% AEP design event. Refer to JWP drawings for further detail.</p>
<p>14) Where naturalised trunk drainage paths traverse development sites, they may be realigned to suit the development footprint, provided that they:</p> <ul style="list-style-type: none"> ■ Comply with the performance requirements for flow conveyance and freeboard; ■ Are designed to integrate with the formed landscape and permit safe and effective access for maintenance; ■ Do not have adverse flood impacts on neighbouring properties; and ■ Enter and leave the development site at the existing points of flow entry and exit. 	<p>The proposed trunk drainage lines within the site will (as per the J. Wyndham Prince Design):</p> <ul style="list-style-type: none"> ■ Comply with requirements for flow conveyance and freeboard. ■ Incorporate sufficient access points for maintenance – maximum spacing of pits will not exceed 75 metres, which is consistent with Penrith City Council's <i>Design Guidelines for Engineering Works for Subdivisions and Developments</i> (considered an appropriate reference in the absence of any specific Sydney Water guideline or standard). ■ Have sufficient capacity to capture and convey flow from the external catchments to the east of the Westlink Industrial Estate, and

DCP Controls	Response
	will therefore not result in adverse flood impacts on neighbouring properties
<p><i>15) Trunk drainage paths shall remain in private ownership with maintenance covenants placed over them to the satisfaction of Council (standard wording for positive covenants is available from Council). Easements will also be required to benefit upstream land.</i></p>	<p>The proposed trunk drainage channel will be located in private lands considered part of Lot 6 gross land area.</p> <p>Maintenance covenants over the trunk drainage channel and easements over public stormwater infrastructure located within private lands will be incorporated in the deposited plans prepared by a Registered Surveyor.</p>
<p><i>16) Where pipes/ culverts are implemented in lieu of naturalised trunk drainage paths, they must remain on private land and not burden public roads, unless otherwise accepted by Council.</i></p>	<p>Not applicable as pipe/culverts are not proposed as part of the trunk drainage. Open channel drainage is proposed which will be situated within private lands and not within public road reserve. The downstream culvert design is as part of Mamre Rd works.</p>
<p><i>17) High vertical walls and steep batters shall be avoided. Batters shall be vegetated with a maximum batter slope 1V:4H. Where unavoidable, retaining walls shall not exceed 2.0m in cumulative height.</i></p>	<p>Batters at maximum 1:4 slope are incorporated across the Estate however given the existing sloping topography of the site along with proposed “flat” pads for industrial warehouses (as the estate is zoned for) retaining walls are unavoidable. Tiered walls as per the Mamre Rd DCP are proposed when adjacent to public roads. Refer Civil Drawings.</p>
<p><i>18) Raingardens and other temporary water storage facilities may be installed online in naturalised trunk drainage paths to promote runoff volume reductions.</i></p>	<p>Not applicable to the Westlink Industrial Estate as proposed.</p>
<p><i>19) Subdivision and development are to consider the coordinated staging and delivery of naturalised trunk drainage infrastructure. Development consent will only be granted to land serviced by trunk drainage infrastructure where suitable arrangements are in place for the delivery of trunk infrastructure (to the satisfaction of the relevant Water Management Authority).</i></p>	<p>The proposed trunk drainage infrastructure will be staged and delivered commensurate with the staging of earthworks and infrastructure across the estate.</p> <p>The trunk drainage infrastructure will form a critical component of the site water management strategy throughout construction and will be incorporated into the Erosion and Sediment Control Plan and Construction Environmental Management Plan.</p> <p>The final form of the trunk drainage lines, including connections to infrastructure downstream of the Westlink Industrial Estate, will be undertaken at a suitable stage of development and will be subject to further consultation with the Sydney Water (the nominated Waterway Manager).</p>

DCP Controls	Response
20) Stormwater drainage infrastructure, upstream of the trunk drainage, is to be constructed by the developer of the land considered for approval.	All stormwater drainage upstream of the proposed trunk drainage lines will be designed and delivered by the proponent.
21) All land identified by the Water Management Authority as performing a significant drainage function and where not specifically identified in the Contributions Plan, is to be covered by an appropriate "restriction to user" and created free of cost to the Water Management Authority.	Noted – subject to further consultation with Sydney Water (the nominated Waterway Manager).
<p>22) All proposed development submissions must clearly demonstrate via 2-dimensional flood modelling that:</p> <p>1) Overland flow paths are preserved and accommodated through the site;</p> <p>2) Runoff from upstream properties (post development flows) are accommodated in the trunk drainage system design;</p> <p>3) Any proposed change in site levels or drainage works are not to adversely impact and upstream or downstream, or cause a restriction to flows from upstream properties;</p> <p>4) There is no concentration of flows onto an adjoining property; and</p> <p>5) No flows have been diverted from their natural catchment to another.</p>	Refer to Flood Impact & Risk Assessment Report prepared by J Wyndham Prince
Overland Flow Flooding	
10) Development should not obstruct overland flow paths. Development is required to demonstrate that any overland flow is maintained for the 1% AEP overland flow with consideration for failsafe of flows up to the PMF.	The proposed major and minor system drainage has been designed such that development within the estate will not obstruct any overland flow paths. Suitable allowance for overland flow has been made within the design of the major and minor system. Any future development in the external catchments must be attenuated to this flow regime. The flood impact assessment will address storms above the 1% AEP.
11) Where existing natural streams do not exist, naturalised drainage channels are encouraged to ensure overland flows are safely conveyed via vegetated trunk drainage channels with 1% AEP capacity plus 0.5m freeboard. Any increase in peak flow must be offset using on-site stormwater detention (OSD) basins.	<p>Refer to Section 3.3 for details of the proposed trunk drainage infrastructure.</p> <p>While the existing conditions show overland flows primarily as sheet flows, the developed case concentrates into the naturalised trunk drainage system. For stage 2 development, the OSD on Lot 6</p>

DCP Controls	Response
	is overcompensating for bypassing roads such that peak flows are below pre-development levels.
<i>12) OSD is to be accommodated on-lot, within the development site, or at the subdivision or estate level, unless otherwise provided at the catchment level to the satisfaction of the relevant consent authority.</i>	The location of the proposed detention tank within Lot 6 is presented on drawing 20-748-C5071. On site detention is provided on an estate level, not an allotment level, however future lot 4 and lot 5 will require OSD to be provided on-lot.
<i>13) Stormwater basins are to be located above the 1% AEP.</i>	No stormwater basins are proposed as part of this SSD.
<i>14) Post-development flow rates from development sites are to be the same or less than pre-development flow rates for the 50% to 1% AEP events.</i>	The performance of the proposed site post developed flows against the stormwater quantity targets in the Mamre Road Precinct DCP is summarised in Table 12
<i>15) OSD must be sized to ensure no increase in 50% and 1% AEP peak storm flows at the Precinct boundary or at Mamre Road culverts. OSD design shall compensate for any local roads and/or areas within the development site that does not drain to OSD.</i>	As demonstrated in Table 12 , the proposed detention tank and outlet from the open channel has been sized to ensure no increase in peak flows at the discharge point from the estate. J Wyndham Prince flood modelling. The Lot 6 OSD tank overcompensates for bypassing road catchments.

4.2. Water Management Strategy Overview

Since the release of the Draft Mamre Road Precinct DCP in November 2020, AT&L has been working with several landowners in the Mamre Road Precinct, Government, other Industry Bodies, and experts in water management to resolve practical solutions that will address the stormwater flow targets that have been adopted in the final DCP.

The *Mamre Road Flood, Riparian Corridor and Integrated Water Cycle Management Report* (FRCIWCM) (Sydney Water, 2023) addresses links between waterway health, hydrology and water quality targets. The stormwater management objectives outlined in the FRCIWCM Report, which have ultimately been adopted in the Mamre Road Precinct DCP, were developed by applying the *Risk-based Framework for Considering Waterway Health Outcomes in Strategic Land-use Planning Decisions* (NSW OEH, 2017). The effects-based assessment outlined in the FRCIWCM Report addressed three metrics relating to waterway health and stormwater management:

1. *Flow volume – mean annual runoff volume (MARV), measured in ML/ha/year.* The target adopted in the Mamre Road Precinct DCP is 2 ML/ha/year (revised from 1.9 ML/ha/year in the Draft DCP). The outcomes for the Westlink Industrial Estate are summarised in **Section 4.9**.
2. *Seasonal pulses – as shown by flow duration curves.* The targets and outcomes demonstrated by a flow duration curve under post-development conditions is presented in **Section 4.9**.
3. *Water quality – as indicated by stormwater pollution reduction.* The targets and outcomes demonstrated as reduction in average annual pollutant load are summarised in **Section 4.7**. Note that as this design contains significant natural catchment, we have adopted the concentration targets as provided in the 21/09/2022 “Technical guidance for achieving Wianamatta South Creek stormwater management targets” produced by DPE.

In the FRCIWCM, Sydney Water also discussed the potential for regional facilities to be implemented to satisfy the stormwater flow objectives for the Mamre Road Precinct. The FRCIWCM report states:

“It is noted that the most cost-effective way to achieve stormwater volume load reductions is via open water bodies and these have a maintenance implication for developers and a wildlife risk.

Through master planning of the Wianamatta South Creek precinct, it will be possible to integrate regional wetlands and water bodies and offset the need for wetlands and open water to be distributed through the Precinct on private lands.

This centralised management of water is preferable as it provides a more appropriate scale of WSUD assets for more cost-effective maintenance and management outcomes.”

The Water Management Strategy for Stage 2 has been developed to satisfy the flow targets fully without the regional solution being in place, by taking advantage of residual undeveloped land as part of the catchment area. It is important to note that for the full site (i.e. further lots becoming developed) to satisfy the flow duration and MARV requirements, the stage 2 measures may need to be altered. By the time that the future development is under assessment, it may also be the case that the regional scheme is further progressed, and these measures may be reduced or decommissioned instead. This report focuses on the “Estate” level flow duration and MARV strategies.

A summary of the proposed stormwater management measures that would be required to satisfy stormwater quality, quantity and flow controls under both the “Estate” and “Regional” Arrangements is presented in **Table 3**.

Table 3: Proposed water management measures under the Estate and Regional Arrangements

	Estate Arrangement (Stage 2) (prior to implementation of regional stormwater management scheme)		Regional Arrangement (with regional stormwater scheme to be operated by Sydney Water)	
Gross pollutant traps (GPTs) (refer to Section 4.5.1 for further details)	✓	GPTs with capacity for hydrocarbon and sediment removal to be installed upstream of the proposed OSD tank and open drainage channel as a pre-treatment measure for the regional stormwater management scheme. SQIDEP approved Atlan Vortceptor units have been chosen.	✓	GPTs with capacity for hydrocarbon and sediment removal to be installed upstream of the proposed detention basin and open drainage channel as a pre-treatment measure for the regional stormwater management scheme. SQIDEP approved Atlan Vortceptor units have been chosen.
Detention Tank (refer to Section 4.5.2 for further details)	✓	Required to satisfy stormwater quantity controls.	✓	Required to satisfy stormwater quantity controls.
Evaporation / Storage ponds and residual irrigation (refer to Section Error! Reference source not found. for further details)	✓	Required to satisfy interim stormwater flow controls and stormwater quality treatment.	×	Will not be required on the basis that stormwater flow controls and stormwater quality treatment will be incorporated into the regional stormwater management scheme.

4.2.1. Technical Guidance for achieving Wianamatta-South Creek stormwater management targets

In September 2022 The Department of Planning and Environment released a *Technical guidance for achieving Wianamatta-South Creek stormwater management targets*. This guideline was prepared to give advice on modelling to undertake, assumptions to make and which data is to be used to demonstrate that the water targets are being achieved. It also provided a range of example WSUD strategies that could be utilised to meet the water quantity targets.

Refer to **Figure 10** below for extract from the Technical Guidelines (page 14) which indicates typical WSUD measures which could be implemented to meet the required water quantity targets.

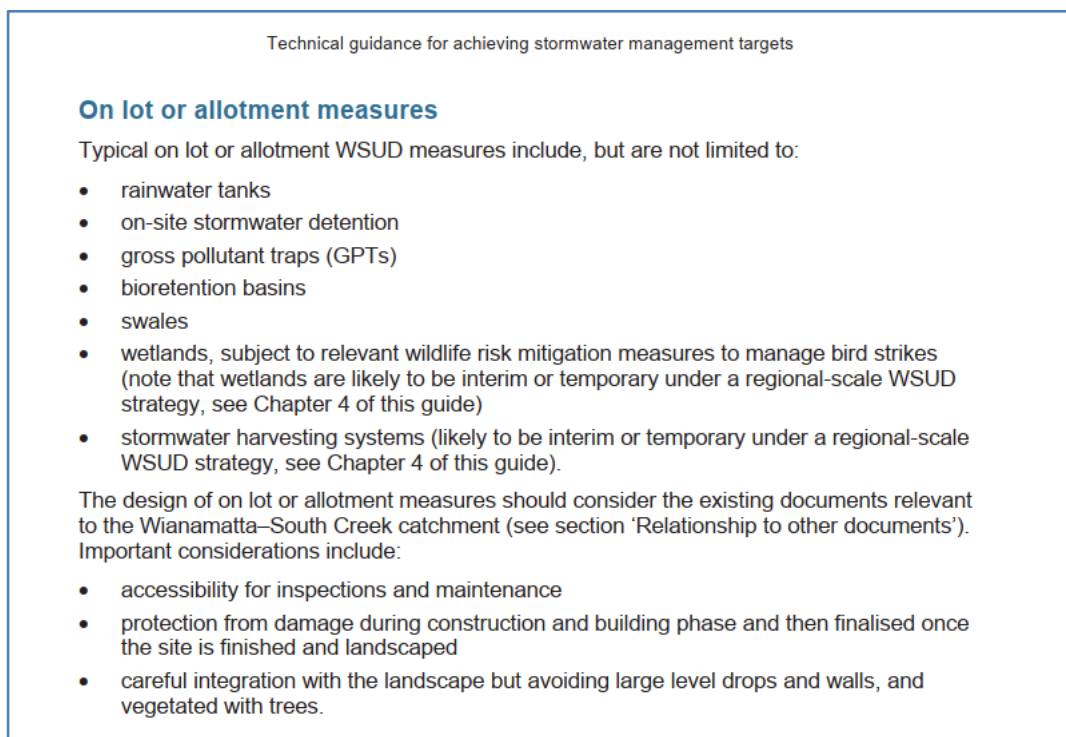


Figure 10 - Extract from Technical Guidance

For this SSD all the dot points as noted within **Figure 10** aside from wetlands and bioretention basins are being incorporated into the civil design to ensure the water quantity targets are met. Refer to **Section 4.5** for additional details.

4.3. Hydrological and Hydraulic Modelling

DRAINS modelling software has been used to calculate the Hydraulic Grade Line (HGL) of the proposed estate-wide stormwater network, including pits, pipes, overland flow paths and detention basins. DRAINS is a software package used for designing and analysing urban stormwater drainage systems and catchments. It is widely accepted by Council's across NSW as the basis for stormwater design and has been confirmed by Penrith City Council as the preferred stormwater software analysis package.

A summary of the key hydrological and hydraulic design parameters adopted in DRAINS to develop a major and minor system drainage design for the proposed development are as follows:

- Minor system (pit and pipe) drainage has been designed to accommodate the 5% AEP storm event.
- The combined pit and pipe drainage and overland flow paths have been designed to accommodate the 1% AEP storm event.
- Where trapped low points are unavoidable and potential for flooding private property is a concern, an overland flow path capable of carrying the total 1% AEP storm event has been provided. Alternatively, the pipe and inlet system has been upgraded to accommodate the 1% AEP storm event.
- Rainfall intensities have been adopted using the Bureau of Meteorology Design Rainfall Data System (2016).
- Times of concentration for each sub catchment have been determined using the kinematic wave equation.
- The width of flow in the gutter does not exceed 2.5 metres and pits are spaced no further than 75 metres apart.
- Velocity x depth product shall not exceed 0.4 m²/s for all storms up to and including the 1% AEP event.
- Bypass from any pit on grade shall not exceed 15% of the total flow at the pit.
- Blockage factors of 20% and 50% shall be adopted for on-grade and sag pits respectively.
- A hydraulic grade line HGL design method shall be adopted for all road pipe drainage design.
- Pipelines in roadways shall have a minimum diameter of 375mm.
- A desirable minimum grade of 1% for all pipelines is preferred for self-cleansing under low flow velocities. An absolute minimum grade of 0.5% has been adopted.
- The minimum cover over pipes shall be 450mm in grassed areas and 600mm within carriageways.
- Where minimum cover cannot be achieved due to physical constraints the pipe class shall be suitably increased.
- All pipes in trafficable areas will be Reinforced Concrete Pipes (RCP) or Fibre Reinforced Cement (FRC) equivalent.
- Pipes discharging to an overland flow path shall adopt a minimum tailwater level equivalent to respective overland flow level.
- Pit Loss coefficients have been calculated in accordance with the Hare Charts as documented in the Queensland Urban Drainage Manual.
- A minimum 150mm freeboard has been maintained between pit HGL and pit surface levels for the minor design storm event (5% AEP).
- Overland flow paths maintain a minimum of 300mm freeboard to all habitable floor levels.

4.4. Stormwater Quality Modelling

The proposed stormwater treatment train has been modelled using the MUSICX software package (Version 1.1.0). Modelling has been undertaken in accordance with the *MUSIC Modelling Toolkit – Wianamatta* (NSW DPIE, 2021).

Rainfall and evaporation data

Penrith City Council's MUSIC-link climate data (rainfall and evapotranspiration) was adopted in the MUSIC model, as well as some evapotranspiration data from the MUSIC Modelling toolkit. The meteorological data includes:

- Pluviometer data (six-minute rainfall intensity and evapotranspiration) for Penrith Lakes AWS (Station 67113) for the period between 1999 and 2008 inclusive (average annual rainfall over this period = 691mm).
- Monthly potential evapotranspiration (PET) as per the *MUSIC Modelling Toolkit - Wianamatta*.

Rainfall-runoff parameters

The rainfall-runoff parameters adopted in the MUSIC model are consistent with the parameters adopted in *MUSIC Modelling Toolkit – Wianamatta*, refer to **Table 4**.

Table 4: Rainfall-runoff parameters adopted in MUSIC

Parameter	Unit	Value
<i>Impervious area parameters</i>		
Rainfall Threshold	mm/day	1.0
<i>Pervious area parameter</i>		
Soil Storage Capacity	mm	150
Initial Storage	% of Capacity	30
Field Capacity	mm	130
Infiltration Capacity Coefficient α	-	175
Infiltration Capacity Coefficient β	-	2.5
<i>Groundwater properties</i>		
Initial Depth (groundwater)	mm	10
Daily Recharge Rate	%	25
Daily Baseflow Rate	%	1.4
Daily Seepage Rate	%	0.0

Source nodes and pollutant generation

Pollutant events mean concentrations (EMCs) for base flow and storm flow scenarios have been adopted from Table 6 of Blacktown City Council's WSUD developer handbook (consistent with the *MUSIC Modelling Toolkit - Wianamatta*). The EMC values are applied to source nodes in the MUSIC model to estimate annual pollutant loads exported from the site under the proposed ultimate development scenario. The adopted pollutant EMCs for various catchment types are summarised in **Table 5**.

Table 5: Stormwater quality parameters for MUSIC source nodes

Landuse category		log10 TSS (mg/l)		log10 TP (mg/l)		log10 TN (mg/l)	
		Base flow	Storm flow	Base flow	Storm flow	Base flow	Storm flow
Roof areas	Mean	1.20	1.30	-0.85	-0.89	0.11	0.30
	Std dev	0.17	0.32	0.19	0.25	0.12	0.19
Road areas	Mean	1.20	2.43	-0.85	-0.30	0.11	0.34
	Std dev	0.17	0.32	0.19	0.25	0.12	0.19
Pervious areas	Mean	1.20	2.15	-0.85	-0.60	0.11	0.30
	Std dev	0.17	0.32	0.19	0.25	0.12	0.19

4.5. Proposed Stormwater Management Measures

A series of stormwater quantity and quality control measures are proposed to be adopted within the site to satisfy the stormwater management strategy objectives listed in **Section 4.1**. A general description of the proposed stormwater treatment train components is presented in the following sections.

4.5.1. Gross Pollutant Traps

The proposed stormwater treatment train under the Interim Arrangement would consist of gross pollutant traps (GPT) upstream of the proposed OSD tank on Lot 6 and connection into open trunk drainage channel as a means of primary stormwater treatment. GPTs are designed to capture litter, debris, coarse sediment, as well as some oils and greases. All GPT's are proposed to be located within private lands with two located within Lot 6 and the other upstream (east) of the open trunk drainage channel.

A high-flow bypass for the GPTs would nominally be equivalent to the 4 EY (3-month ARI) peak flow rate discharging to the GPT. Design flows for the GPTs and their final configuration would be confirmed at the detailed design phase. Atlan Vortceptor units have been uniformly chosen, as they are SQIDEP approved and providing sufficient treatment for the interim phase. Potential alternative products must be SQIDEP approved, and requires re-running of the estate wide MUSIC modelling to ensure estate level compliance.

4.5.2. Detention Tanks

Stormwater runoff from the developed Lot 6 is proposed to be collected via pits and pipes and discharge into the proposed detention tank within the north west corner of the lot. This underground tank will provide storage and with a controlled outlet structure detain all storm events up to and including the 1% AEP event. Proprietary treatment devices will be installed within the tank to ensure the stormwater nutrient targets as met to comply with the Mamre Road DCP. Part of the tank volume (excluded from OSD volume) is to be used as stormwater storage for reuse purposes. This is discussed further in **section 4.5.4**.

A summary of the key detention tank parameters and DRAINS model results for the major and minor system flow is presented in **Table 6**.

Table 6 : Key Lot 6 Detention Tank & Reuse tank parameters and Drains model results

Parameter	Unit	Lot 6 Tank
Base level	mAHD	42.44
Reuse Tank max Still Water Level	mAHD	42.94
Low Flow orifice level	mAHD	42.94
Low Flow orifice diameter	mm	310
Mid Flow orifice level	mAHD	44.30
Mid flow orifice diameter	mm	700
High flow weir crest level	mAHD	44.75
High flow weir length	mm	500
Outlet pipe diameter	mm	900dia
Outlet pipe upstream IL	mAHD	42.94
Outlet pipe downstream IL (at channel)	mAHD	42.30
Outlet pipe length	m	46m
Tank Roof Level	mAHD	45.05
Total Tank Volume	m ³	2530
Total Tank Reuse Volume	m ³	150
Total Tank OSD Volume	m ³	2380
5% AEP		
Peak Inflow	m ³ /s	2.11
Peak Outflow total	m ³ /s	0.737
Peak tank water level	mAHD	44.78
Peak tank storage	m ³	2050
1% AEP		
Peak Inflow	m ³ /s	2.87
Peak Outflow total	m ³ /s	1.31
Peak OSD water level	mAHD	45.05
Peak tank storage (excluding long term storage)	m ³	2380

4.5.3. Erosion and Sediment Basins (acting as evaporation ponds)

Ponds provide an effective means of reducing runoff volume from the site as water would be lost via evaporation over a large area. A pond can capture large quantities of stormwater runoff, while also being relatively easy to maintain.

Large-scale MUSIC modelling undertaken by AT&L indicates that, in combination with other measures, ponds can achieve a relatively high reduction of stormwater runoff volume and are generally more efficient than irrigation.

This Water Management Strategy under the Estate Arrangement (in the absence of the regional stormwater management scheme), which addresses the stormwater flow targets adopted in the Mamre Road Precinct DCP, incorporates an erosion and sediment pond within the residual pads of Lot 5, Lot 2 and the northern part of lot 4.

Table 7: Adopted estate-wide pond parameters

Parameter	Lot 5 Pad	Lot 4 Northern Pad	Lot 2 Pad
Contributing Catchment (ha)	15.86	5.75	2.72
Surface Area (m ²)	3093	1250	1258
Permanent pool volume (m ³)	5082	1881	1090
Exfiltration rate (mm/hr)	0	0	0
Evaporative loss (% of PET)	100	100	100

4.5.4. Stormwater Harvesting for Irrigation

As per the Technical guidance for achieving Wianamatta-South Creek stormwater management targets stormwater harvesting and reuse is another effective way to reduce stormwater flow volumes from frequent flows events to achieve the water quantity targets.

Water runoff from the developed Lot 6 is proposed to be stored in tank volume underneath the OSD tank volume (refer Section 4.5.2) within Lot 6 carpark. Refer to Drawing 20-748 C6121 for early layout. Water from this reuse tank will be stored and used as irrigation in the residual lot 6 pads. Refer to Table 8 for re-use details.

Refer to Drawing 20-748 C5220 for extent of residual lands to be irrigated via this basin. It is noted this basin arrangement is interim only, to be used only before the regional basins are constructed (and decommissioned when instructed by DPIE).

Table 8: Summary of reuse tank parameters under the Stage 2 Arrangement

Lot	Total Lot Area (ha)	Catchment Area of Tank (ha)	Estimated annual irrigation demand (kL/yr)	Total re-use volume required (within OSD tank) m ³
6 (Storage tank)	7.16	6.42	4000 (On Lot 6)	200

4.5.5. Rainwater Tanks

Recent discourse from Sydney Water and DPIE indicate that rainwater tanks under interim conditions, where the estate is to be connected to the future recycled mains scheme, are not desired. As such no rainwater tanks collecting runoff from the roof areas are proposed for Lot 6. It is proposed this lot with be connected to the recycled water network within Adlington Road when constructed.


4.5.6. Passively Irrigated Street Trees

Advice received from Sydney Water are that passively irrigated street trees are an important component of their Regional stormwater drainage scheme. These street trees need to be designed to the Sydney Water Stormwater Scheme Infrastructure and Council's approval.

As the time of writing this report (August 2024) it is our understanding SWC and Penrith City Council have prepared a draft design for the passively irrigated street tree (PIST) which is on exhibition for comments. Whilst no design of the PIST are including within street infrastructure of Westlink Estate as yet these trees will be incorporated into the street infrastructure design once finalised. These trees will be included within all public road reserves as per Sydney Water's requirements. The street trees are excluded from the MUSIC modelling.

4.5.7. Atlan Vortceptor Gross Pollutant Traps

Atlan Vortceptor units are specified within Lot 6 at both inlets to the OSD tank, as well as upstream of the trunk drain to treat road drainage. The Atlan Vortceptor is a SQIDEP approved GPT, so it is permitted to provide treatment in the MUSIC modelling for TN, TP, and TSS, as well as for Gross pollutants. This is sufficient to provide treatment within stage 2 without any tertiary treatment to the concentration based targets for the estate.

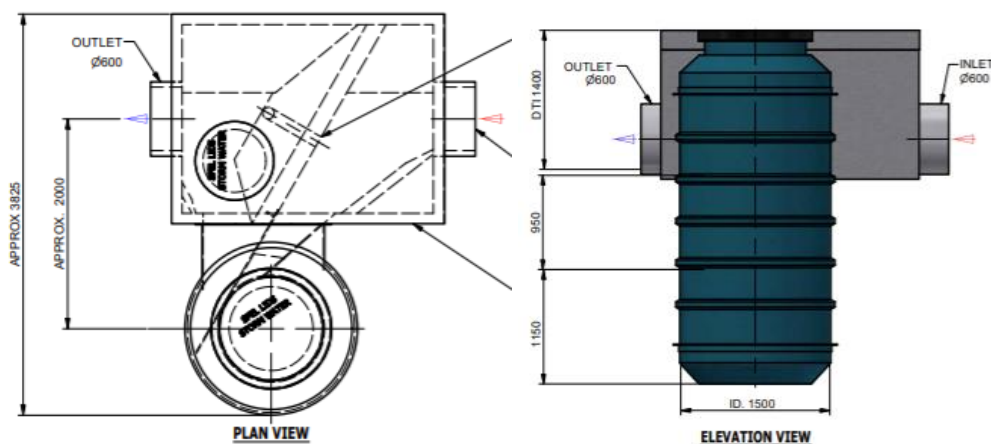

Each GPT provides a weir pit to divert low flows into the Vortceptor, with excessive flows overtopping the internal weir. The low flows are then filtered with a sump and a screen to remove the pollutants, before returning to the weir pit downstream of the weir.

The treatable flow is treated at SQIDEP approved removal rates: 100% for Gross Pollutants (GP), 93% for Total Suspended Solids (TSS), 86% for Total Phosphorous (TP) and 49% of Total Nitrogen. Each of the 3 Vortceptor units specified are the SVO.096 unit, with 96L/s of treatable flow rate.

Table 9: Music Modelling Catchments

Catchment	Total Area (ha)	Impervious Area (ha)	Pervious Area (ha)
LOT 6 70% ROOF	3.14	3.14	-
LOT 6 HARDSTAND	1.13	1.13	-
LOT 6 PERVIOUS & LANDSCAPE	0.75	-	0.75
LOT 6 30% ROOF	1.35	1.35	-
ALDINGTON RD	1.13	0.90	0.23
LOT 5 BATTER	2.28	-	2.28
RESIDUAL LOT 5 PAD	7.03	-	7.03
RESIDUAL LOT 4 SOUTH	7.83	-	7.83
ABBOTS & ACCESS RD	1.03	0.82	0.21
TRUNK DRAINAGE RESERVE + IOP	0.79	0.16	0.64
STAGE 1 AREA (APPROVED UNDER PREVIOUS SSD)	27.2		
EXTERNAL CATCHMENT D1	2.30	0.23	2.07
TOTAL INTERNAL	55.96	22.34	33.62

Table 10: Post-development scenario land use breakdown under the Interim Arrangement

Catchment	Total Area (ha)	Roof area to rainwater tanks (ha)	Other impervious area (ha)	Pervious area (ha)	% Pervious area
Lot 6 (including drainage reserve)	7.16	1.35	4.43	1.39	19.4
Access Roads to Southern Trunk	2.16	-	1.73	0.43	20
Stage 2 Developed Areas	9.32	1.35	6.16	1.82	19.5
Residual catchments draining through stage 2	19.39	-	-	19.39	100

Pond area is considered impervious area.

Note: Residual and External catchments are assumed to represent existing greenfield flows and not included within the Music modelling for flow duration or stormwater quality management, as agreed with CPHR (previously EH&G) in the consultation period – with the exception of catchment EX.C1 (as part of stage 1) and EX.D1 as requested by CPHR.

The post-development scenario model under the Interim Arrangement incorporates the following stormwater management measures:

- Pervious landscape target of 15% as per Clause 4.2.3 (4) of the Mamre Road DCP s achieved as the total % pervious area for the developed portion of Stage 2 equates to 19.5% (refer Table 10).
- Rainwater tanks, as per the parameters presented in Section 4.5.5.
- GPTs, as per the parameters described in Section 4.5.1.
- Detention tank, as per the parameters described in Section 4.5.2.
- Stormwater reuse tank for irrigation, as per the parameters presented in Section 4.5.4
- Erosion and Sediment Basin for CPESC compliance, but improving flow reduction targets,

- Landscape irrigation, at 3.0ML/ha of pervious space (600mm/year with 50% of area irrigated).
- Residual land irrigation at 6.0ML/ha (600mm/year with 100% of area irrigated)
- Baseflow from pervious residual land surfaces is assumed to drain directly to the receiving node over time (red dashed arrows in **Figure 11**).

The attributes for each of the proposed stormwater management measures have been determined such that they will satisfy the stormwater quality, quantity and flow targets outlined in **Section 4.1**.

4.7. Performance against stormwater quality targets

The “MUSIC MODELLING TOOLKIT – WIANAMATTA” Published on 20/04/2022 by DPE, supplied to “support assessments and development of proposals for State Significant Development”, provides two options for operational phase stormwater quality targets. The first option is the traditional “reduction in mean annual load from unmitigated development”, while the new Option 2 provides an allowable mean annual load. For this development, due to the high amount of residual land, the allowable mean annual load target has been selected.

MUSIC model results presented as mean annual loads per hectare per year at the receiving node indicate that the adopted stormwater quality target reductions are achieved, as shown in **Table 11**.

Table 11: Summary of MUSIC modelling results against stormwater quality targets (kg/ha/year)

Parameter	Proposed Layout Source Load (kg/ha/yr)	Proposed Layout Residual Load for Stage 2 (kg/ha/yr)	Target allowable Mean Annual Load (kg/ha/yr)
TSS (kg/ha/yr)	422.1	71.24	80.00
TP (kg/ha/yr)	0.86	0.198	0.30
TN (kg/ha/yr)	6.00	2.37	3.50
Gross Pollutants (kg/ha/yr)	72.96	2.36	16.00

The MUSIC model results presenting treatment train effectiveness shows that while the adequately satisfies the allowable mean annual loads (Option 2). Due to the large proportion of un-developed land contributing to the treatment train, the reduction targets are less feasible than in a fully developed estate assessment.

Under the Sydney Water Regional strategy, stormwater quality management measures would be incorporated into the regional stormwater management scheme to be designed, delivered and operated by Sydney Water. In this case, the Stage 1 filter cartridges, Stage 2 Trunk Drainage GPT, residual irrigation, rainwater tanks, and storage ponds or tank volumes are expected to become redundant, with treatment targets met by Sydney Water centralised assets.

Additionally, as per the RTS comment, the MUSIC model has been run inclusive of external catchments for treatment rates only, to confirm that the treatable flow rates and water balance are not negatively affected by the additional volumes of water. Note that the “per hectare” target has not been adjusted to increase with the additional external areas. The results are still within the limits required – this is a “check only” and added as an additional MUSIC model for submission. Note that these catchments have not been used in assessing the flow duration curve as per previous stage 1 advice.

4.8. Performance against stormwater quantity targets

Table 12 presents the pre-development and post development flow rates, generated by hydrologic and hydraulic modelling in DRAINS, for a range of events between and including the 50% AEP and 1% AEP design storm events at the discharge points from the site. Note that the DRAINS model incorporates the future lot 4 and lot 5 developments as 85% impervious catchments, such that the OSD is designed appropriately for the ultimate design of the development.

Table 12: Pre-development and post-development peak flow rates (Interim and Ultimate Arrangements)

Design Storm Event	Pre-Development Peak Flow Rate (m ³ /s)	Post-Development Peak Flow Rate (m ³ /s)
50% AEP	1.37	1.20
20% AEP	2.09	2.09
10% AEP	3.00	2.80
5% AEP	4.01	4.01
2% AEP	6.13	5.80
1% AEP	7.42	7.42

The DRAINS model results demonstrate that the post-development peak flow rates would be less than or equal to pre-development peak flow rates for a range of storm events between (and including) the 50% AEP and 1% AEP design events. Therefore, the stormwater drainage system and detention basins as proposed would satisfy the development controls relating to stormwater quantity management.

The Westlink Estate design flows have been derived using IL-CL methods and post development flows use ILSAX modelling to these limits. It is understood that the higher level modelling undertaken by Sydney Water uses RAFTS modelling, resulting in significantly lower pre-development peak flow rates (5.1m³/s for the 1% AEP). RAFTS is not practical or accurate for finely modelling urban catchments to the level of detail the civil design must reach. Our understanding is that while using ILSAX and IL-CL results in higher flow rates, as long as we are consistent with our internal modelling of pre-development and post-development this will be acceptable to Sydney Water. The flood modelling by J Wyndham Prince provides a like for like analysis against Sydney Water modelling showing that the development does not negatively impact the downstream catchments, regardless of the modelling method used for the urban catchments.

4.9. Performance against stormwater runoff volume targets

MUSIC model results demonstrating performance of the proposed stormwater management measures in the Interim Arrangement against the stormwater flow targets are presented below in **Table 13**. The resultant flow duration curve is presented as **Figure 12**.

Table 13: Summary of MUSIC model results against stormwater flow targets (Interim Arrangement)

Parameter	Result	DCP Target	Complies with DCP target	
			DCP Option 1 (MARV approach)	DCP Option 2 (Flow Duration Curve approach)
Mean annual runoff volume (ML/ha/yr)	1.95	2.0	Yes	n/a
95%ile flow (L/ha/day)	24,241	3000 to 15000	n/a	No
90%ile flow (L/ha/day)	4,656	1000 to 5000	Yes	Yes
75%ile flow (L/ha/day)	336	100 to 1000	n/a	Yes
50%ile flow (L/ha/day)	49	5 to 100	Yes	Yes
10%ile flow (L/ha/day)	0	0	Yes	n/a
Cease to flow	11%	10% to 30%	n/a	Yes

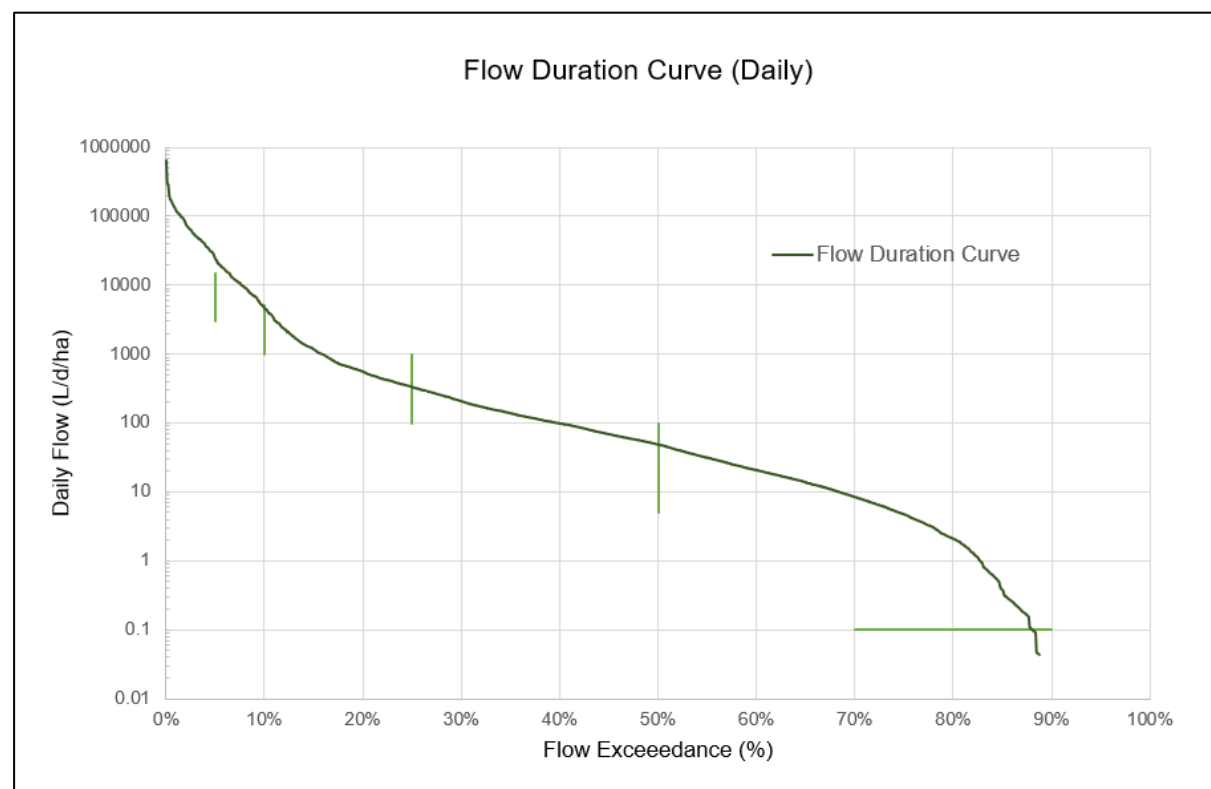


Figure 12: Flow duration curve for the proposed stormwater management measures

The results presented in **Table 13** demonstrate the proposed stormwater management measures that will be implemented under the Interim Arrangement satisfy the Option 1 DCP stormwater flow targets for the site.

4.10. Ongoing Management and Maintenance

All proposed water management measures that make up the Interim Arrangement of the water management strategy would be managed and maintained by the proponent. An Inspection and Maintenance Plan will be prepared and lodged with the construction certificate for the subdivision works once final design details and the extent and layout of all proposed water management measures is confirmed. It is anticipated that the Inspection and Maintenance Plan would be prepared using current best practice guidance such as *Water sensitive urban design inspection and maintenance guidelines* (Blacktown City Council, 2019) and would describe:

- Each of the functional components of each water management measure.
- Expertise required to inspect, maintain and (where necessary) repair or replace components.
- Minimum required frequency of inspection, repair or replacement activities.
- Inspection and maintenance forms that list all necessary activities and contain a record of activities completed.

The Estate Arrangement would incorporate some estate-based measures such as on-lot rainwater tanks, GPTs and an estate-wide detention basin. These measures would be managed and maintained by the proponent, with inspection and maintenance requirements consistent with those described above. The planned regional stormwater management scheme, which would incorporate measures to manage stormwater quality and volume across the Mamre Road Precinct, would be managed and maintained by Sydney Water.

5. Site Water Balance

5.1. Water Balance Overview

Potable water supplies in the Sydney area are in recognised short supply with projected population increases, potential climate change and periods of extended drought. It is acknowledged that any development in the Sydney region places greater demand on an already limited water supply. As a result, government bodies, together with Sydney Water have encouraged sustainable development by the implementation of an integrated approach to water cycle management (potable water, sewerage, stormwater and rainwater) to minimise potable water demand and maximise the potential for non-potable water sources to replace potable water demand where possible.

With the appointment of Sydney Water as the regional Waterway Manager and the announcement of a regional stormwater management scheme, opportunities for water reuse within the Mamre Road Precinct will include regional stormwater harvesting and reticulated recycled water.

5.2. Water Requirements

Water requirements within the Westlink Industrial Estate will be typical of large format warehouses and distribution centres. Sources of demand for water within the proposed allotments and public domain will include:

- Office amenities (kitchen, bathrooms)
- Landscape irrigation
- Dust suppression (depending on end user requirements)

5.3. Water Sources

The primary source of water to the Westlink Industrial Estate will be Sydney Water's potable water reticulation network.

A "third-pipe" reticulated recycled water network will supply non-potable water throughout the Mamre Road Precinct. Non-potable water will be supplied from two sources:

- Stormwater harvested within precinct-wide wetlands / ponds, to be delivered and operated by Sydney Water as part of a regional stormwater management scheme.
- Recycled water from the planned Upper South Creek Advanced Recycled Water Centre.
- Recycled roof runoff water treated and pumped on site.

5.4. Water Use Minimisation

Sydney Water provides a wide range of advice and guidance relating to water use minimisation and water efficiency. Whilst warehouses and distribution centres are relatively low water users in comparison to other industrial users, the following water use minimisation principles will apply to development within the Westlink Industrial Estate:

- **Avoid using water** where possible, such as sweeping hard surfaces instead of washing them.
- **Reduce water use** by installing water-efficient appliances and equipment (e.g., toilets, urinals, shower heads).
- **Reuse water** from manufacturing or cooling processes to toilet flushing, landscape irrigation and dust suppression.

6. Overland Flow Flooding

The site is located outside the extent of the Flood Planning Area identified in the *Penrith Local Environment Plan 2010*, refer to **Figure 13**.

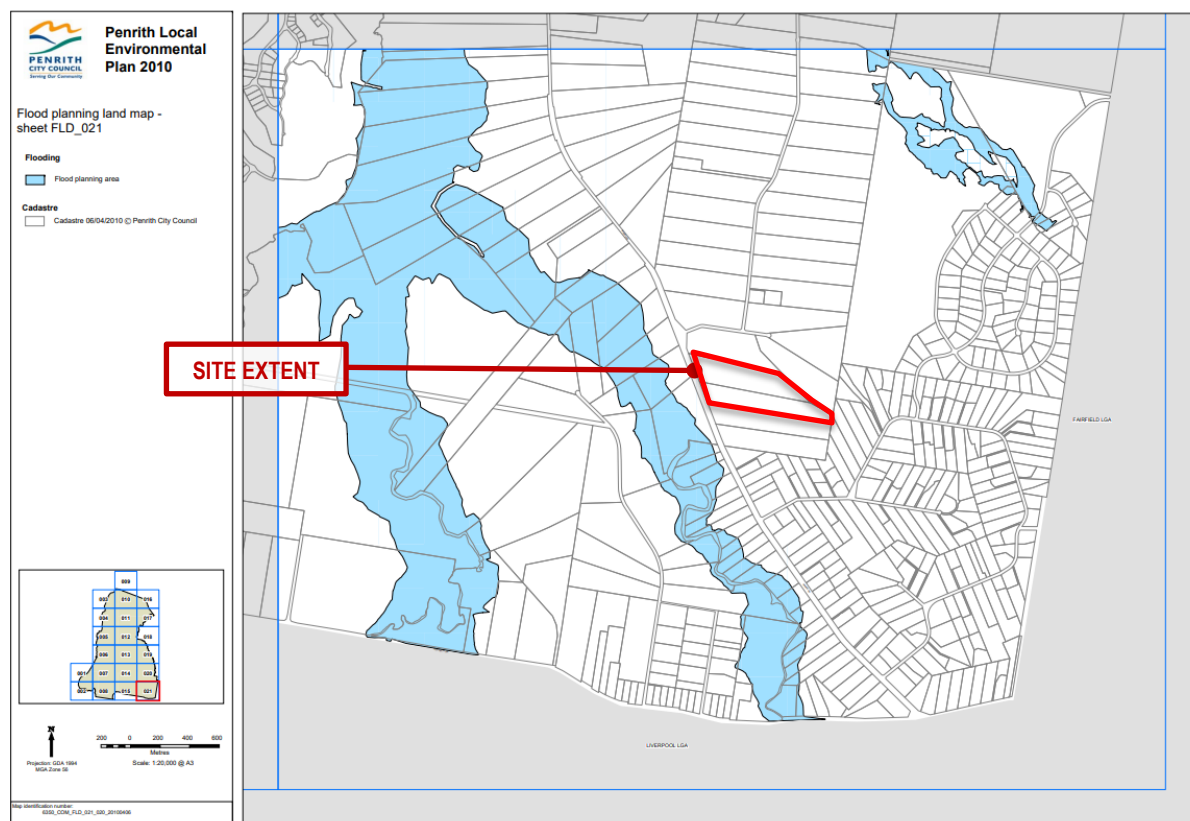


Figure 13 : Extract of flood planning land map (Penrith LEP 2010)

Mapping of the 1% AEP flood extent from local catchments within the Mamre Road Precinct is presented in the *Mamre Road Flood, Riparian Corridor and Integrated Water Cycle Management Strategy* (Sydney Water, October 2020), and is reproduced as Error! Reference source not found. This mapping shows the extent and depth of overland flow from local catchments within the site.

The proposed development of the site, including bulk earthworks, construction of a major and minor drainage system and construction of the proposed detention basin, will satisfy the development controls related to flood prone land outlined in Section 2.5 of the Mamre Road Precinct DCP.

The design of major system drainage elements is consistent with the principles of the NSW Government *Floodplain Development Manual* and Penrith City Council's *Stormwater Drainage Specification for Building Developments*. Under the post-development scenario, overland flow will be safely contained within the proposed road reserve and within trunk drainage infrastructure that has been incorporated into the design of the subdivision works.

As presented in **Table 12**, the post-development peak flow rates will be less than the pre-development peak flow rates at each of the discharge points for all design storm events between (and including) the 50% AEP and the 1% AEP event. Therefore, there will be no flood impact on adjacent properties associated with the proposed development of the site.

Refer to "**Westlink Industrial Estate, Kemps Creek – Stage 2 Flood Impact & Risk Assessment Report**" January 2025 by J Wyndham Prince for further details including 2D flood modelling of downstream impacts.

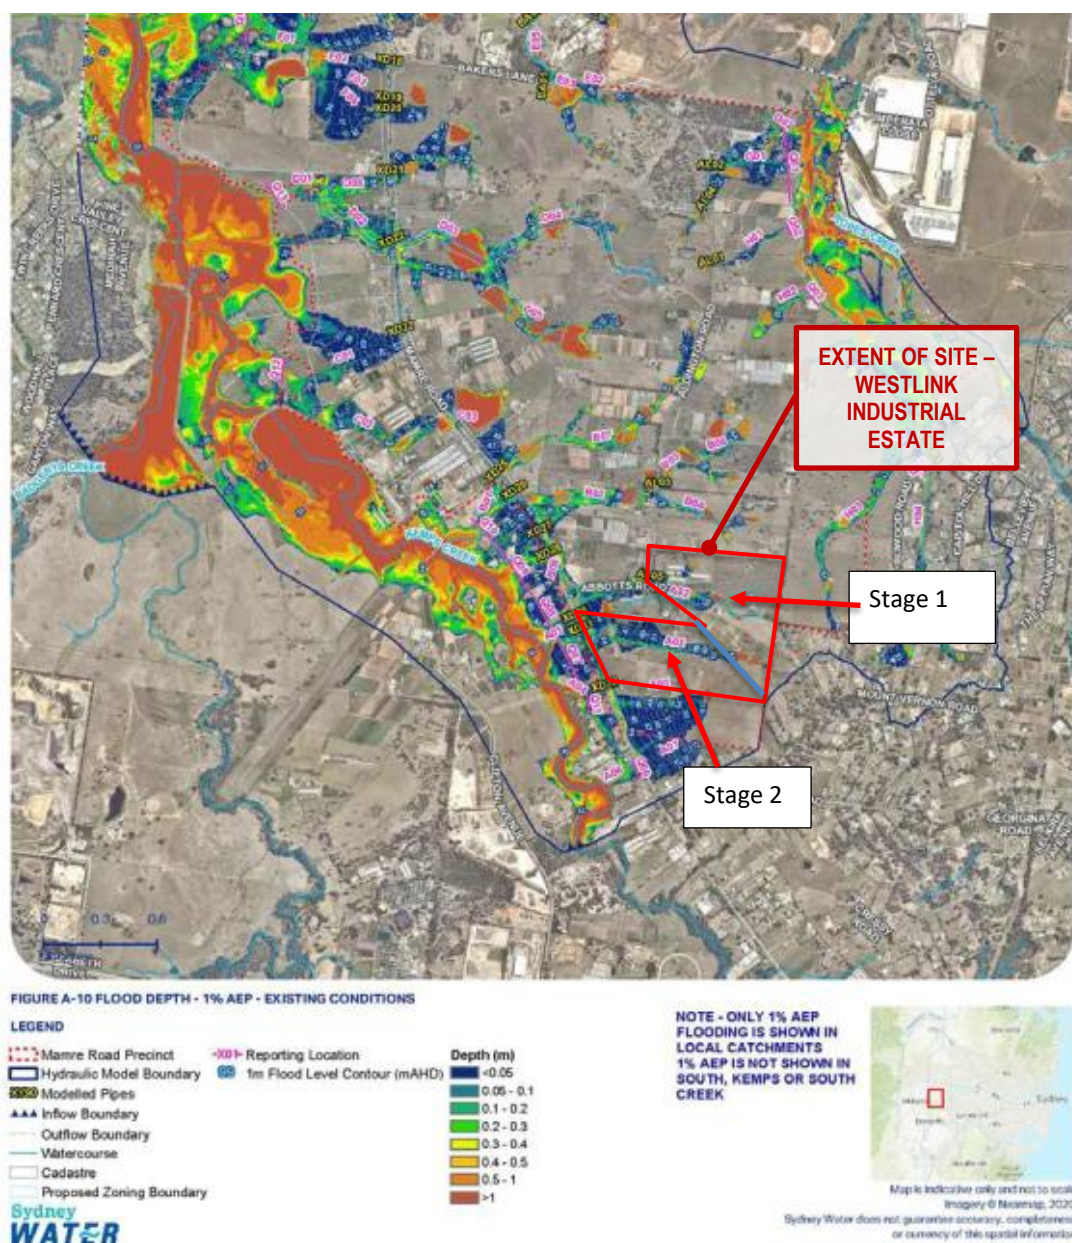


Figure 14: 1% AEP flood depth from local catchments under existing conditions (Sydney Water, 2020)

Figure 14 above shows that there are some flood impacts under the existing conditions within the stage 2 site.

The J Wyndham Prince modelling indicates the development of Westlink Stage 2 and Lot 4 and 5 will not result in adverse flood impacts on surrounding properties and does not adversely increase the flood hazard categories in the site. While the site is impacted by overland flows flood hazards for local floods have been assessed and are managed within acceptable levels.

7. Inspection and Maintenance Plan

7.1. Maintenance and Operations

Inspection and maintenance of the stormwater management measures that will be implemented under Stage 2 Phase 1 conditions shall be undertaken at the minimum frequency as outlined in Error! Reference source not found. The majority of these requirements have been derived from the Penrith City Council guideline titled [*Water sensitive urban design \(WSUD\) inspection and maintenance guidelines*](#) (Version 1.0, 2022).

Refer to **Appendix 3** for Inspection and Maintenance Sheets for each of the stormwater management elements that will be owned, operated and maintained by the Property Owner (or representatives), including:

- Rainwater tanks
- On-lot stormwater drainage
- Gross pollutant traps
- OSD Tank

Table 14 - Inspection and monitoring requirements

Inspection / Monitoring Requirement	Responsibility	Timing / Frequency	References / Notes
1. On-lot stormwater drainage (including rainwater tanks)			
Eaves / box guttering system and downpipes	ESR as current property manager	At least once every six months	Refer to Inspection and Maintenance Sheets for rainwater tanks in Appendix 3 .
On-lot stormwater drainage – grates and pits	ESR as current property manager	At least once every year	
On-lot stormwater pits and pipes (by CCTV)	ESR as current property manager	At least once every three years	
Rainwater tank (first flush device, external inspection of tank and fittings)	ESR as current property manager	At least once every six months	Refer to Inspection and Maintenance Sheets for rainwater tanks and Maintenance Manual (Appendix 3).
Rainwater tank – internal inspection and cleaning of tank, pumps, pipework and fittings	ESR as current property manager	At least once every year	
2. Gross pollutant traps			
GPT components (lids and surrounds, inlet, outlet, sump, screens, oil baffles)	ESR as current property manager	At least once every six months	Refer to Atlan Vortceptor Operation and Maintenance Manual
3. Estate-wide stormwater drainage (within road reserve)			
Stormwater drainage elements visible at ground level (grates, lintels, headwalls)	Penrith City Council	To be determined by Penrith City Council	Assets to be incorporated into Council’s asset management system
Stormwater pits and pipes (by CCTV)	Penrith City Council	To be determined by Penrith City Council	

Inspection / Monitoring Requirement	Responsibility	Timing / Frequency	References / Notes
4. OSD Tank			
Tank inlet and outlet	ESR as current property manager	At least once every six months	Refer to Inspection and Maintenance Sheets for OSD Tank in Appendix 3 .
Tank discharge control pit (grates, orifices, screens)	ESR as current property manager	At least once every six months	
5. Stormwater Pump Station and Irrigation Rising Main			
Pre-packaged pump station	ESR as current property manager	At least once every six months	To be confirmed with Pump Manufacturers
Rising Main	ESR as current property manager	At least once every six months	
Irrigation sprinkler system	ESR as current property manager	At least once every six months	
6. Open Trunk Drainage Channel			
Irrigation of landscaped elements	Sydney Water and ESR as current property manager	Monthly during establishment. TBC with Sydney Water	Assumed SWC will maintain open trunk drainage channel. To be confirmed with ESR as current property manager how hand over process works
Visual inspections after more than 5mm of rainfall	Sydney Water and ESR as current property manager	Monthly and/or after 5mm of rainfall during establishment	
Debris/Blockage removal	Sydney Water and ESR as current property manager	Monthly during establishment. TBC with Sydney Water	
Weed Management and Plant replacement	Sydney Water and ESR as current property manager	Monthly during establishment. TBC with Sydney Water	
Soil / Rock Protection inspections	Sydney Water and ESR as current property manager	Monthly during establishment. TBC with Sydney Water	

7.2. Monitoring

Elements of the stormwater management measures that will be monitored will be limited to general condition of each of the measures, which will be recorded on the Inspection and Maintenance Sheets for each measure (refer to **Appendix 3**).

7.3. Reporting and Auditing

Reporting and auditing of the stormwater management measures that will be incorporated under Stage 1 Phase 1 conditions will require completion of Inspection Sheets and Maintenance Sheets at the minimum interval recommended in Error! Reference source not found.. Inspection and Maintenance Sheets for each of the measures are included in **Appendix 3** and have been either:

- Reproduced from the Penrith City Council WSUD inspection and maintenance guideline; or
- Produced using a similar format to the sheets incorporated in Council's guideline.

Completed Inspection Sheets and Maintenance Sheets for all stormwater management measures that will be owned, monitored and implemented by the Property Owner will be incorporated in an asset register and retained for the purpose of monitoring and environmental audit reporting that is required under [Division 9.4 of Part 9 of the Environmental Planning and Assessment Act 1979](#).

8. Contingency Management

In the event that this SMP is not effective in managing potential environmental impacts, specific contingency actions will be implemented. **Table 15** lists actions to be implemented if inspections, monitoring or auditing indicate that the stormwater management measures listed in **Section 5** and any specialist management plans are not effective in managing environmental impacts.

The Contingency Plan categorises conditions as follows:

- **Condition Green** – considered to be normal operating condition.
- **Condition Amber** – minor non-compliance that should be rectified as soon as practical.
- **Condition Red** – non-compliance that should be rectified as a matter of urgency.

Table 15 - Contingency measures relating to operational stormwater management

Element	Trigger / Response	Condition Green	Condition Amber	Condition Red
Water quality monitoring	Trigger	No visible indicators within the Westlink Estate (oil / grease, turbidity). No complaints from property owners downstream of the Westlink Estate	Visible indicators within the Westlink Estate. Complaints from property owners downstream of the Westlink Estate	Prolonged poor water quality within ponds and downstream of the Westlink Estate.
	Response by ESR as current property manager	Continue SMP / OEMP implementation	Water quality sampling and testing to be undertaken to ensure results are just an anomaly and not a trend.	Appropriate rectification measures are implemented (e.g., aeration, additional filtration). Follow up water quality monitoring is undertaken to ensure parameters meet the ambient water quality objectives for the Wianamatta-South Creek catchment.
Flooding (inundation of lots, surcharge of stormwater drainage)	Trigger	Stormwater drainage system and riparian corridor functioning as per design intent (no exceedance of capacity, no surcharge in road network or inundation of lots)	N/A	Inundation of lots. Surcharge of stormwater drainage within road reserve.
	Response by ESR as current	Continue SMP / OEMP implementation	N/A	Check for blockages within stormwater drainage network

Element	Trigger / Response	Condition Green	Condition Amber	Condition Red
	property manager			(sediment, debris, OSD Basin inlet and outlet structures). Rectify when required.
OSD Tank-Safety	Trigger	OSD tank functioning as intended – no visible damage to tank structure	Minor defects within OSD tank (e.g., blockage at discharge control pit).	Major defects within OSD Tank (e.g., failure of the discharge control pit)
	Response by ESR as current property manager	Continue SMP / OEMP implementation	Undertake short-term rectification works to address defects.	Undertake urgent works to address defects.
Pumped Irrigation System	Trigger	Pumped Irrigation system functions as intended- no visible damage to pumps or pressure mains.	Minor defects to Pump and pressure main but pump still operating	Major defects with pump and pressure main. Pump broken and not operating
	Response by ESR as current property manager	Continue SMP/OEMP implementation	Undertake minor repairs	Undertake urgent works to address defects

9. Lifecycle Costs

9.1. OSD Basin

Lifecycle costs associated with the OSD basin will be in accordance with Landcom Water Sensitive Urban Design Book 4 – Maintenance as indicated in **Figure 15**.

The costs within **Figure 15** are based off 2003-2004 rates so would need to be indexed off 2023 prices (According to Rawlinsons 2022, 2003 to 2021 indexation is + 93% is a conservative estimate) and based off current rates provided by Civil and Landscape contractors for all associated WSUD works. These prices would be confirmed during Detailed Design and civil/landscaping tendering periods.

LIFE CYCLE COST ELEMENT	BIORETENTION	WETLANDS	PONDS & SEDIMENTATION BASINS
Life cycle	25 to 50 years	15 to 80 years (with 50 years used as the default in MUSIC) Wetlands are designed to have an infinite life span. However, to determine a life cycle cost, a finite number needs to be set	5 year (sedimentation basins) 50 years (ponds)
Total acquisition cost (TAC) (per m ²)	387.4 x (A) ^{0.7673} \$1000/m ² for first 20 m ² (\$200/m ² for remaining area)	1911 x (A) ^{0.6435} The treatment area used in defining the total acquisition cost is the combined inlet and macrophyte zone area	685.1 x (A) ^{0.7893}
Total annual maintenance (TAM) (%TAC)	48.87 x (TAC) ^{0.4410}	6.831 x (A) ^{0.8634}	185.4 x (A) ^{0.4780} The annual maintenance cost considers the volume of material likely to be removed from the basin per year (referred in MUSIC as the size attribute, V). The size attribute is the sum of gross pollutants, coarse sediment and total suspended solids (TSS) that are trapped in the basin / pond per year
Renewal period (years)	25	20 Renewal considerations include replanting and recontouring of the macrophyte zone	1 year (default in MUSIC due to lack of evidence). 10 years based on available data
Renewal costs (%TAC p.a.)	2.0%	0.52%	1.4% Costs associated with access ramps and contouring Limited data available
Decommissioning costs (% TAC)			38% - only applicable to sedimentation basins

Figure 15 - Lifecycle Costs from Landcom

9.2. Proprietary Stormwater Treatment Devices

Proprietary stormwater treatment device specifications and life cycle costs will be confirmed by the Manufacturer. Ocean Protect & Atlan as manufacturers will provide these specifications at the detailed design stage.

9.3. Pumping and Landscape Irrigation System

Pumping spec and life cycle cost will be confirmed by the Hydraulic Engineer.

APPENDIX 1 – CIVIL DRAWINGS

- 20-748-C5000 SERIES (INFRASTRUCTURE)
- 20-748-C6000 SERIES (ON-LOT)

APPENDIX 2 – STORMWATER HYDROLOGY SUMMARY

APPENDIX 3 – INSPECTION, MAINTANCE AND OPERATIONS GUIDELINES
