


STEP DETAIL
(NTS)

NOTE: MAINTAIN REQUIRED RUNNING BOND IN WELDED WIRE FORMS AT STEPS IN FOUNDATION.

NOTES:


1. FACING TO CONSIST OF PREFABRICATED STEEL WWF, 4 IN x 4 IN, W4.0 x W4.0 FORMS.
2. WIRE FOR FORMS AND STRUTS SHALL COMPLY WITH ASTM A82. FABRICATION SHALL COMPLY WITH ASTM A185.
3. OVERALL LENGTH OF WIRE FORMS IS 10.00 FT. EFFECTIVE CONSTRUCTED LENGTH IS 9.67 FT WITH 0.33 FT OVERLAP AT ENDS.

WELDED WIRE FORM DETAIL

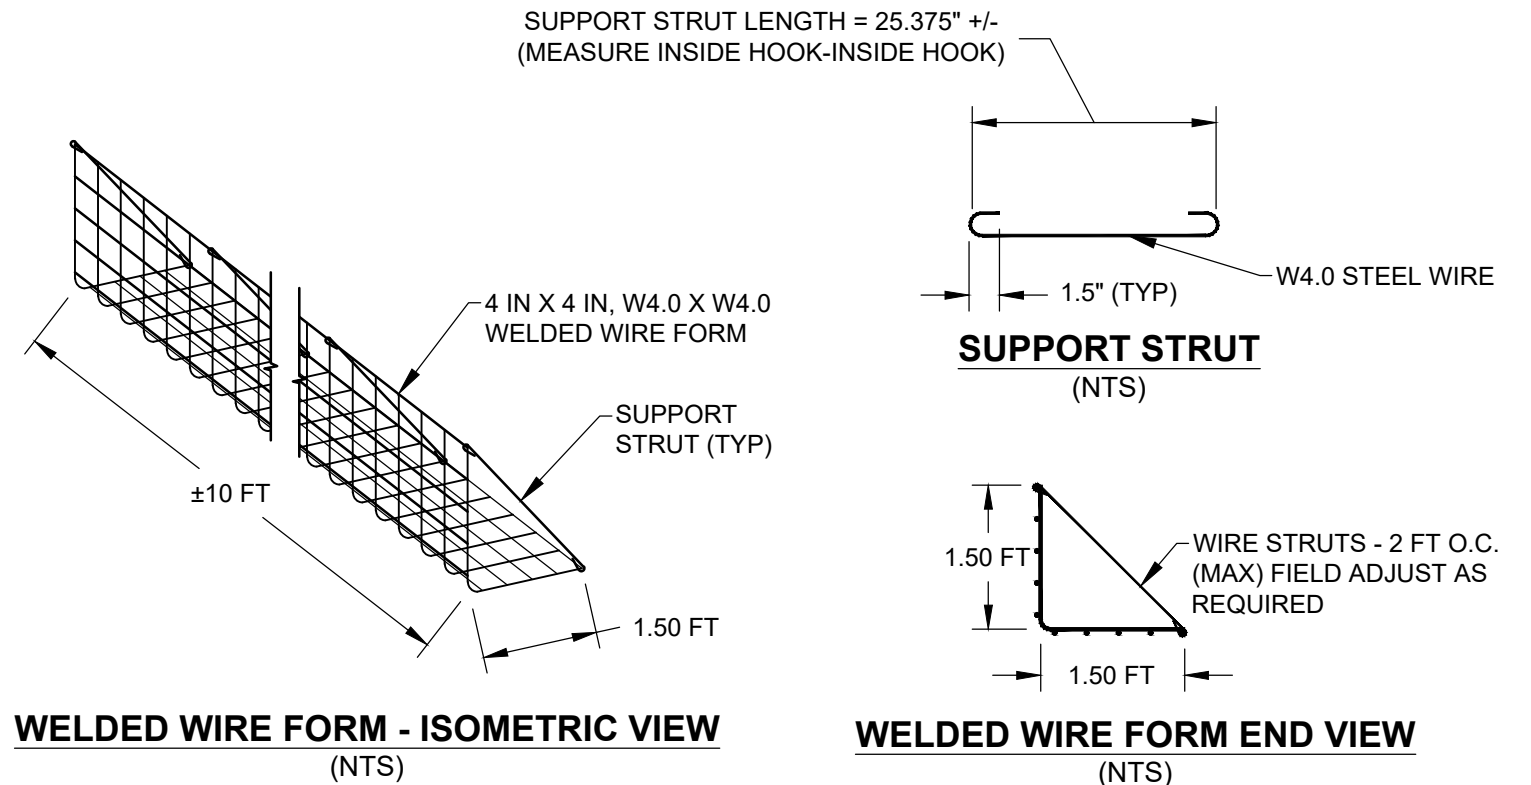

WELDED WIRE FORM - ISOMETRIC VIEW
(NTS)

WELDED WIRE FORM END VIEW
(NTS)

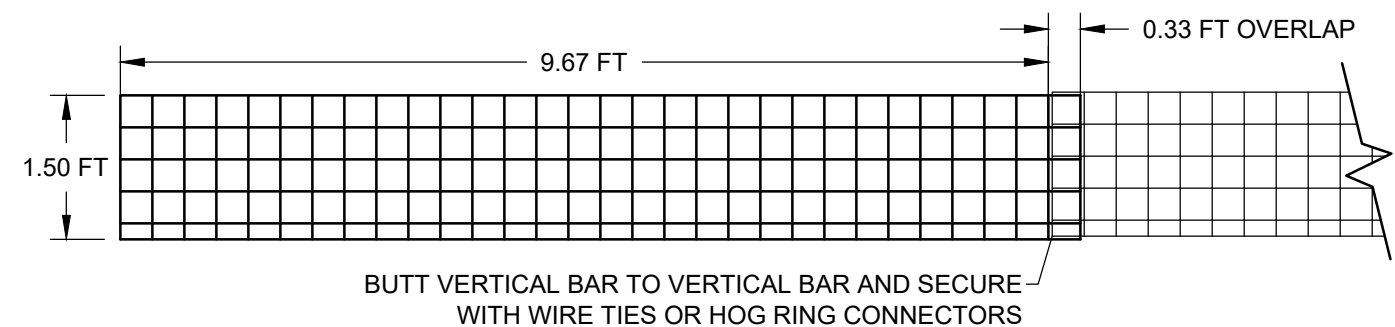

WELDED WIRE FORM OVERLAP - PLAN VIEW