


SPECIFICATIONS


Light Source	LED	
Spectrum	Standard (S), Hybrid (H), White (W)	NOS2427V (S), NOH2427V (H), NOW2427V (W)
PPF	610, 580, 590 $\mu\text{mol/s}$	(S), (H), (W)
Input Power	240 W	Tolerance +/- 2%
Efficacy	2.54, 2.42, 2.46 $\mu\text{mol/J}$	(S), (H), (W)
Input Voltage	277/480 VAC	
Input Frequency	60 Hz	
Inrush current	480 VAC: 1.3 A ² s, 1.43 ms	
Fixture Dimensions	11.7" W x 6.5" L x 3.2" H	
Weight	4.3 kg	
Input connector	Wieland RST20I3S S1 ZR1	
Mounting Height	Trellis mounted	
Enclosure material	Tempered AR-glass, Powder coated steel enclosure	
Heat sink material	Anodized aluminum	
Thermal Management	Passive	
Dimming	0 – 10V, PWM*	*on request
Dimming connector	M8	
Automation interface	Netled lighting automation	Greenhouse automation compatible (0-10 V)
Beam angle	80 °	
Lifetime (L90)	40 000 h	
Power Factor	96 %	277 VAC
Operating temperature	0 – 40 °C	
Storage temperature	-20 – 40 °C	
Ingress Protection Rating	IP55, suitable for wet locations	
Certifications	CE, RoHs, cETLus	
C16 Installation quantity	11, 4	277 VAC, 480 VAC



Hybrid

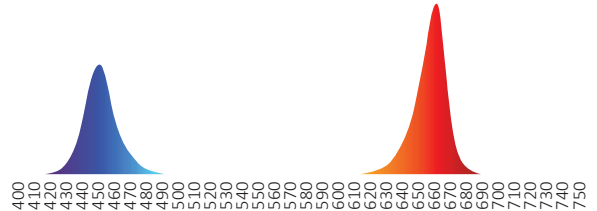

White

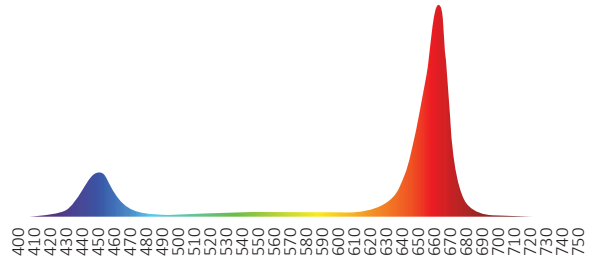

Standard

