



**PACKAGE CONTENTS**

- Power Bank
- AC Power Adaptor
- Car Power Adaptor
- Jumper Cable
- Storage Case
- User Manual

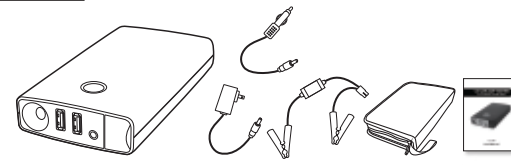

**PRODUCT SPECIFICATIONS**

Product Dimensions: 5.35 x 2.99 x 0.98 inch (136 x 76 x 25 mm)  
 Product Weight: 0.65 lbs (295g)  
 Capacity: 8000 mAh (3.7V),  
 Input: 15V 1A  
 Output: USB; 5V 3.1A total; 12V for car jump starter  
 Charging Time: 3 hours  
 Starting Current: 200A-350A  
 Operating Temperature: -4°F ~ 140°F (-20°C ~ 60°C)

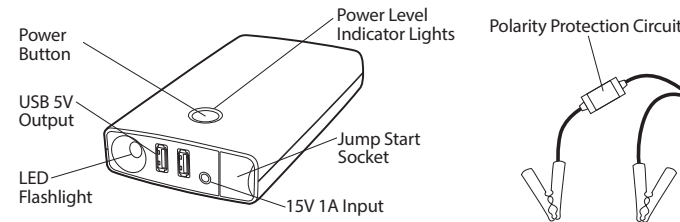

**Power Level Indicator Lights**

Press the power button to check the capacity of the Power Bank

Indicator Lights	1 Flashing	1 Solid	2 Solid	3 Solid	4 Solid
Battery Capacity	Below 5%	5-25%	26-50%	51-75%	76% - full


When charging, the indicator lights will flash one by one. The number of solid lights indicates the battery capacity. When all the indicator lights are solid then the Power Bank is fully charged.

**OPERATION**

**To charge your Power Bank**

- At home:**
1. Plug the AC Power Adaptor into any 120V outlet.
  2. Connect the DC plug into the 15V 1A input port on the Power Bank.


- In Car:**
1. Plug the car adaptor into the socket of cigarette lighter.
  2. Connect the DC plug into the 15V 1A input port on the Power Bank.

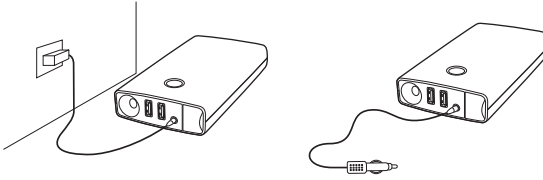

**To power your mobile devices**

Use the original manufacturer's USB cable that came with your device and plug into one of the USB output ports. You can charge two devices at the same time. One of the ports has a maximum output of 2.1A while the other is 1.0A (total combined output is 3.1A). Once you charge your mobile, the power level indicator will show the battery level. The power indicator will turn off after 30 seconds. To check the power capacity again, simply press the power button on once.

The power bank will identify and charge the electronic device automatically.



**To use flashlight**

Press the power button for 3 seconds to start the LED illumination. You can then select from 3 modes (On/Strobe/SOS) by pressing the power button lightly in sequence.



**NOTE:** This equipment has been tested and found to comply with the limits for Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and the receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received, including interference that may cause undesired operation.

**PROP 65 WARNING:** This product contains lead, a chemical known to the state of California to cause cancer, birth defects or other reproductive harm.

Have a comment or question? Email us at [customer@winplus.com](mailto:customer@winplus.com) or visit us online at [www.winplus.com](http://www.winplus.com)

**WINPLUS**

820 South Wamaker Avenue, Ontario, CA 91761 | Tel: 866-294-9244

© 2016 Winplus North America Inc. All Rights Reserved.

ML-55386\_V3

**12V CAR JUMP STARTER & Portable Power Bank**



AC55386  
User Manual

**To jump start the vehicle battery, proceed as follows:**

Jumper cables are color coded, RED for POSITIVE (+) and BLACK for NEGATIVE (-). DO NOT mix up the cables or allow the metal ends to touch together because this may damage the battery, charging system and/or electronics on a vehicle.

1. Press power button on the power bank once and check that the power level indicator is 3 lights or higher.
2. Take the BLUE end of the jumper cable and plug it into the power bank jump start socket which is located underneath the black cover.
3. Clamp the RED jumper cable to the POSITIVE (+) post on the car battery. The POSITIVE battery post will be slightly larger than the NEGATIVE post, and will be marked with a PLUS (+) sign. There may also be a RED plastic protective cover over the positive battery post.
4. Clamp the BLACK jumper cable to the NEGATIVE (-) post on the car battery. The NEGATIVE will be marked with a MINUS (-) sign. There may also be a BLACK plastic protective cover over the negative battery post.

**NOTE:** Do not connect the red clamp (+) and the black clamp (-) at the same time.

**CAUTION:** DO NOT lean directly over the battery while making jumper connections.

5. Check the LED status on the indicator box located on the BLACK jumper cable. Unless the light is flashing RED and BEEPING, proceed to the next step. Please reference the LED status chart on the next page if needed.
6. You now have 30 seconds to start your vehicle. If it does not crank or cranks very slowly, wiggle the jumper connections to make sure they are making good contact. Then try again. The engine should start if there are no other problems (such as a bad starter or ignition circuit problem). Do not attempt to jump start the vehicle more than 3 times from the Power Bank. If the vehicle fails to start then it is likely that there is an alternative reason.
7. As soon as the engine starts, the indicator box on the BLACK jump cable will blink red and beep to let you know it is ok to disconnect. Please disconnect the jumper cables from your car within 30 seconds.
  - First remove the RED/POSTIVE end and then the BLACK/NEGATIVE clamp.

Do not allow the metal ends of the jumper cables to touch each other or the RED cables to touch anything metal on the car.

- Now unplug the BLUE end of the jumper cable from the power bank. This will reset the jumper cable. In 10 seconds the power bank will power off automatically.
- 8. Keep the engine running 20 to 30 minutes, or drive the car to recharge the battery.

**NOTE:** If the engine dies shortly after it has been jump started, or as soon as the jumper cables are disconnected, it probably means the vehicle charging system is not working (bad alternator, voltage regulator, wiring problem or loose/dirty battery cables). Please seek professional help.

Power Bank Jump Starter may not work correctly for vehicles that require remote battery jumper locations (ie: battery located in trunk or other location). Please consult vehicle owners manual

**Polarity Protection Circuit Status**

Status (Light & Sound Indicator)			Mode
Red Light	Green Light	Sound	
○	●	None	The car battery is ready for jump start.
●	○	None	The Power Bank needs to be charged.
●	●	None	The car battery is ready for jump start. If the indicator doesn't turn solid Green, the car battery voltage is higher than the power bank. You can still jump start your battery, but may need to charge your power bank.
●	○	Beeping	Disconnect the jumper cable from the car battery and power bank. Either the car jump start is complete or there is a connection problem.
●	●	None	Disconnect the jumper cable from the car battery and power bank to reset. This status shows after 30 second time out.
○	○	None	Please contact Winplus for troubleshooting

● On ● Flashing ○ Off

**WARNING:**

- Always wear safety glasses when jump starting a battery (to protect your eyes), and gloves when handling a battery (to protect your hands).
- When jump starting a vehicle please ensure that the blue plug is securely fitted into the jump start socket on the Power Bank.
- Ensure the battery clamps are connected correctly, and the connectors are free from rust and dirt.
- Do not allow this product to become wet.
- Do not immerse the product in water.
- Do not operate the product in explosive atmospheres, such as in the presence of flammable liquid, gas or dust.

- Do not modify or disassemble this product.
- Do not store in locations where the temperature may exceed 140°F (60°C).
- Charge only using the charger provided.
- Under extreme heat conditions, battery leakage may occur. Avoid contact with your skin. In case of skin or eye contact, rinse immediately with clean water and seek medical attention.

**BATTERY DISPOSAL**

The battery is self-contained and not consumer replaceable. The battery must be disposed of properly when it no longer holds a charge. Proper charging practices will increase the life of the product. For information on battery recycling, call toll-free 800-822-8837.

For information regarding air travel safety with batteries please reference this website by the U.S. Department of Transportation: <http://phmsa.dot.gov/safetravel/batteries>

**Note:** This 12V Car jump starter and portable power bank contains the equivalent of 2.4g of lithium and gives 29.6 watt hours of power.

**WARRANTY**

**WINPLUS NORTH AMERICA LIMITED WARRANTY**

Winplus North America warrants, to the original purchaser, that its products are free from defects in material and workmanship for 1 year from the date of original purchase. Where permitted by law, Winplus North America's liability shall be limited to that set forth in this limited express warranty. This limited express warranty shall be the exclusive remedy of the purchaser and Winplus North America makes no other warranty of any kind aside from the limited express warranty stated above.

**NOTE:** Warranty only applies for North American customers of purchases made in North America.

**CONDITIONS OF WARRANTY**  
 If during the 1 year warranty period your new product is found to be defective, Winplus North America will repair such defect, or replace the product, without charge for parts or labor subject to the following conditions:

1. All repairs must be performed by Winplus North America.
2. All warranty claims must be accompanied by a copy of the sales receipt or bill of sale.
3. The equipment must not have been altered or damaged through

negligence, accident, improper operation, or failure to follow the product instructions for installation, use, or care.

4. The replacement of parts is excluded from the warranty when replacement is necessary due to normal wear and tear.
5. Repair or replacement parts supplied by Winplus North America under this warranty are protected only for the unexpired portion of the original warranty.
6. This is a "repair or replace" warranty only, and does not cover the costs incurred for the installation, removal or reinstallation of the product, or damage to any mobile phone, electronic device or vehicle.

**OWNER'S RESPONSIBILITIES:**

Winplus North America will make every effort to provide warranty service within a reasonable period of time. SHOULD YOU HAVE ANY QUESTIONS ABOUT SERVICE RECEIVED OR IF YOU WOULD LIKE ASSISTANCE IN OBTAINING SERVICE, PLEASE CALL TOLL FREE 1.866.294.9244 DURING REGULAR BUSINESS HOURS MONDAY THROUGH FRIDAY 9:00 AM TO 5:00PM (Pacific Standard Time). For customer service and technical support, please call us at 1.866.294.9244 or email us at [customer@winplus.com](mailto:customer@winplus.com). If at that time it is determined that a replacement unit is needed, the support representative will issue a Return Authorization and instruct on how to get a new unit. Winplus North America makes no other warranty of any kind aside from the limited express warranty stated herein.

**DISCLAIMER OF WARRANTIES, INCLUDING WARRANTY OF MERCHANTABILITY AND WARRANTY OF FITNESS FOR PARTICULAR PURPOSE: EXCEPT AS SPECIFICALLY SET FORTH HEREIN, NO WARRANTY OR REPRESENTATION, EXPRESS OR IMPLIED, IS MADE AS TO THE CAR JUMP STARTER EXCEPT AS EXPRESSLY SET FORTH HEREIN, WINPLUS NORTH AMERICA AND/OR ITS AFFILIATES EXPRESSLY DISCLAIMS, WITHOUT LIMITATION, ANY STATUTORY WARRANTIES AND ALL IMPLIED WARRANTIES, INCLUDING ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.**

Winplus North America and/or its affiliates are not responsible for a user's intended or actual use of the Car Jump Starter. In no event shall Winplus North America and/or its affiliates have any liability for any losses (whether direct or indirect, in contract, tort or otherwise) incurred in connection with the Car Jump Starter, including but not limited to damaged property, personal injury and/or loss of life. Neither shall Winplus North America and/or its affiliates have any liability for any decision, action taken based on relying on the stability or performance of the Car Jump Starter. Winplus North America and/or its affiliates, the manufacturer, distributor and seller shall not be liable for any injury, loss or damage, incidental or consequential, arising out of the use or intended use of the product.