

LED PERIMETER LIGHTS

DIRECTIONAL WARNING FOR ANY FIRE OR EMS APPARATUS




REPLACE " _ " with A = Amber, B = Blue, G = Green, R = Red, W = White

WITH BEZEL	WITHOUT BEZEL	TYPE	LENS	ILLUMINATION COLORS
65BZ_	65_	Single	*	A, B, R, W
65BZ__	65__	Split	*	RA, RB, RW
65BZC_	65C_	Single	C	A, B, R
65BZRS	65RS	Steady Burn	*	R
65BZRV	65RV	Reverse	*	W
45BZ_	45_	Single	*	A, B, G, R, W
45BZ__	45__	Split	*	RA, RB, RW
45BZC_	45C_	Single	C	A, B, R
45STBZR	-	STT	*	R
45BZRV	45RV	Reverse		W
85BZ_	85_	Single	*	A, B, R, W
85BZC_	-	Single	C	A, B, R
-	85C_	Single	C	A, R
85BZ__	85__	Split	*	RA


These high-output LED perimeter lights are available in three sizes to accommodate any application in the fleet. They are available in five single colors with split-color options as well. The perimeter lights feature 20 attention-grabbing flash patterns, field-replaceable outer lenses, a shock-resistant design and an extended 100,000-hour lifespan.

VOLTS	12V / 24V
DIMS	5.0" H x 9.2" L x 1.6" D 127mm H x 233mm L x 41mm D (45) (with bezel) 6.0" H x 8.4" L x 1.7" D 152mm H x 214mm L x 42mm (65) (with bezel) 9.1" H x 11.1" L x 1.8" D 231mm H x 282mm L x 45mm D (85) (with bezel)
FLASH PATTERNS	20
CERTS	CLASS I (SAE J595) A & R only, CLASS II (SAE J595) B & W only, CA T13, NFPA, KKK-A 1822F
DETAILS	<ul style="list-style-type: none"> • Surface mount • Sealed waterproof power supply • Shock resistant • Rated 100,000 hour life • Illumination Colors dictates lens color*

45BZ

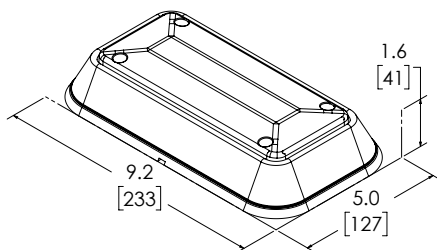

65BZ

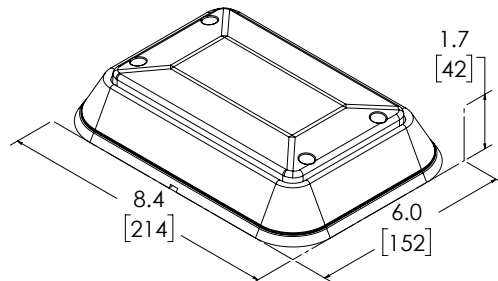

85BZ

