

PRIZM™II PERIMETER LIGHTS

DIRECTIONAL WARNING FOR ANY FIRE OR EMS APPARATUS



WITH BEZEL	WITHOUT BEZEL	TYPE	LENS	ILLUMINATION COLORS
378_BZ-75	378_-75	Single-Color	*	A, B, R, W
378C_BZ-75	378C_-75	Single-Color	Clear	A, B, R
378SCRBZ	-	Steady Burn	Clear	R
3712_BZ-75	3712_-75	Single-Color	*	A, B, R, W
3712C_BZ-75	3712C_-75	Single-Color	Clear	A, B, G, R, W
3712C__BZ-75	3712C__-75	Split-Color	Clear	AW, RA, RB, RW
3712SCABZ	-	Steady Burn	Clear	A
3722C__BZ	3722C__	Steady Burn, Dual-Color	Clear	AW, BA, BW, RA, RB, RW
468_BZ-75	468_-75	Single-Color,	*	A, B, R, W
468C_BZ-75	468C_-75	Single-Color	Clear	A, B, R
4612_BZ-75	4612_-75	Single-Color	*	A, B, G, R, W
4612C_BZ-75	4612C_-75	Single-Color	Clear	A, B, G, R
4612C__BZ-75	4612C__-75	Split-Color	Clear	AW, RA, RB, RW
4612FSR	-	Steady Burn - Headlight	Clear	R
4612SCWBZ	-	Steady Burn	Clear	W
4622C__BZ	4622C__	Steady Burn, Dual-Color	Clear	AW, BA, BW, RA, RB, RW
798_BZ-75	798_-75	Single-Color	*	A, B, R, W
798C_BZ-75	798C_-75	Single-Color	Clear	A, B, R
798SCBZ	-	Steady burn	Clear	W
798SCRBZ	-	Steady Burn	Clear	R
798S_BZ	-	Steady Burn	*	A, R
7912_BZ-75	7912_-75	Single-Color	*	A, B, R, W
7912C_BZ-75	7912C_-75	Single-Color	Clear	A, B, G, R, W
7912C__BZ-75	7912C__-75	Split-Color	Clear	AW, RA, RB, RW
7912SCRBZ	-	Steady Burn	Clear	RB
7922C__BZ	7922C__	Steady Burn, Dual-Color	Clear	AW, BA, BW, RA, RB, RW


These perimeter warning lights offer advanced dual reflector LED technology that delivers brighter and more focused output for superior visibility. The optional, multi-color and vertically-split lightheads provide maximum versatility to accommodate any application. Choose from single or a triple row of intense LEDs powered by PriZm™II technology. Features include synchronization between multiple lightheads, easy install or retrofit as well as dimming and steady burn functions. Water resistant seals included.

VOLTS	12V
DIMS	5.0" H x 9.2" L x 1.6" D 127mm H x 233mm L x 39mm D (378, 3712, 3722) (with bezel) 6.0" H x 8.4" L x 1.6" D 152mm H x 214mm L x 39mm D (468, 4612, 4622) (with bezel) 9.1" H x 11.1" L x 1.6" D 231mm H x 282mm L x 39mm D (798, 7912, 7922) (with bezel)
LEDS	468, 4612, 4622 - 1 row of LEDs 378, 3712, 3722 - 1 row of LEDs 98, 7912, 7922 - 3 rows of LEDs
FLASH PATTERNS	30
CERTS	CLASS I (SAE J595), CA T13, NFPA, KKK-A 1822F
DETAILS	<ul style="list-style-type: none"> • Surface mount • Low amp draw • Dimming • Sync-capable between multiple lighthead assemblies provides a full range of flash capabilities ever required • Water resistant seals • Illumination Colors dictates lens color*
REPLACE	"_" with A = Amber, B = Blue, G = Green, R = Red, W = White


PRIZM™ II PERIMETER LIGHTS

DIRECTIONAL WARNING FOR ANY FIRE OR EMS APPARATUS

378, 3712, 3722

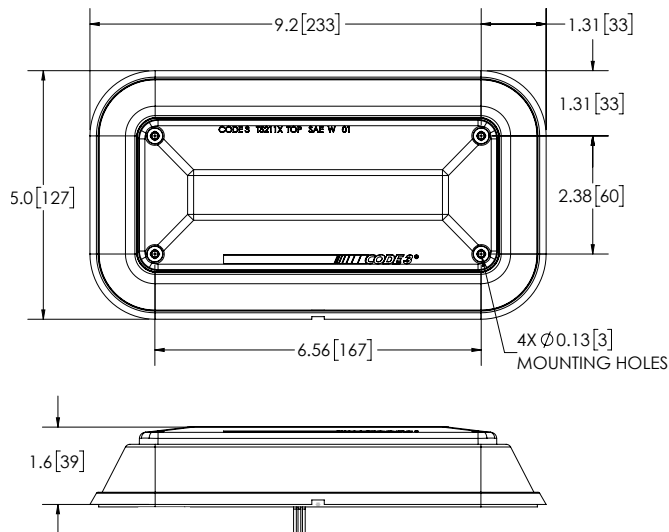

468, 4612 4622

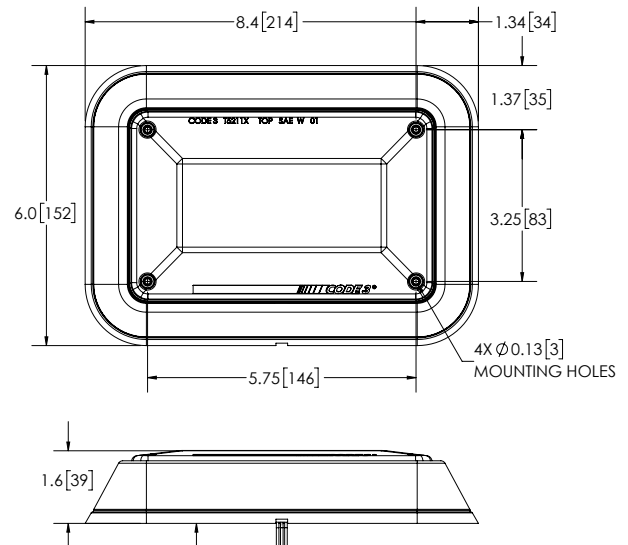

798, 7912, 7922

