
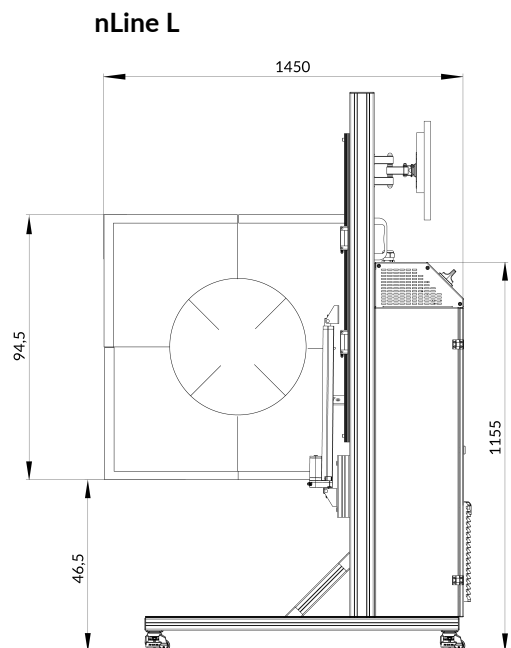


| Model Name | 3-Cam-System | | 4-Cam-System |
|--------------------------------------|-------------------------------|-------------------------------|--------------------------------|
| | nLine S | nLine M | nLine L |
| Physical Attributes | | | |
| Dimensions (L x W x H) | 978 mm x 520 mm* x 1820 mm | 978 mm x 520 mm* x 1820 mm | 1450 mm x 550 mm* x 1850 mm |
| Weight | ~ 125 kg | ~ 125 kg | ~ 200 kg |
| Product Inspection | | | |
| Speed max. | up to 300 m/min | up to 500 m/min | up to 100 m/min |
| Product Diameter min. | 0,5 mm | 2,0 mm | 30 mm** |
| Product Diameter max. | 2,0 mm | 30 mm | 165 mm |
| Electrical | | | |
| Lenses | motorized | motorized | motorized |
| Operating Ambient Temperature | 5°C - 45°C | 5°C - 45°C | 5°C - 45°C |
| Operating Voltage | 230 VAC (50/60 Hz) | 230 VAC (50/60 Hz) | 230 VAC (50/60 Hz) |
| Power typical | 800 W | 800 W | 1000 W |
| Power max. | 3220 W | 3220 W | 3600 W |
| Ingress Protection | IP20 | IP20 | IP20 |
| Device Fuse | C16A | C16A | C16A |

*The width of 520 mm of the nLine device is measured without PowerCON plug.
This requires an additional 10 cm (approx.).

**20 mm for product lines with low to no product vibrations.

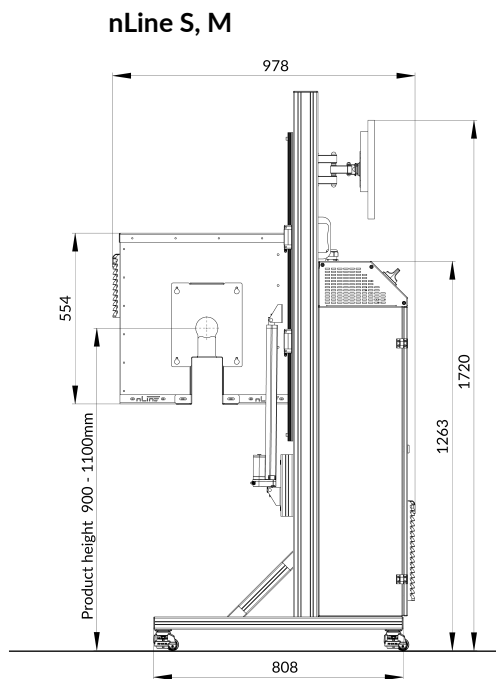

Approximate measurements
Drawing is not in scale