
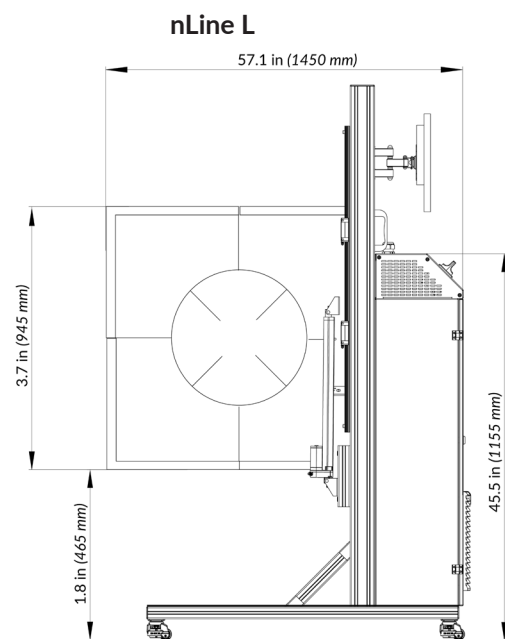


Technical Specifications

	3-Cam-System		4-Cam-System
Model Name	nLine S	nLine M	nLine L
Physical Attributes			
Dimensions (L x W x H)	38.5 x 20.5* x 71.7 in 978 x 520* x 1820 mm	38.5 x 20.5* x 71.7 in 978 x 520* x 1820 mm	57.1 x 21.65* x 72.83 in 1450 x 550* x 1850 mm
Weight	275.6 lbs / ~125 kg	275.6 lbs / ~125 kg	440.9 lbs / ~200 kg
Product Inspection			
Speed max.	Speed up to 984 ft/min. / 300m/min.	Speed up to 1,640 ft/min. / 500m/min.	Speed up to 328 ft/min. / 100m/min.
Product Diameter min.	0.020 in / 0,5 mm	0.079 in / 2,0 mm	1.18 in / 30 mm
Product Diameter max.	0.079 in / 2,0 mm	1.18 in / 30 mm	6.50 in / 165 mm
Electrical Attributes			
Lenses	motorized	motorized	motorized
Operating Temperature (Ambient)	5°C - 45°C	5°C - 45°C	5°C - 45°C
Operating Voltage	230/240VAC (50/60Hz)**	230/240VAC (50/60Hz)**	230/240VAC (50/60Hz)**
Power	800 W	800 W	1000 W
Power max.	3220 W	3220 W	3600 W
Ingress Protection	IP20	IP20	IP20
Device Fuse	C16A	C16A	C16A

*The width of 20.5 in (520 mm) / 21.65 in (550 mm) of the nLine device is measured without PowerCON plug. This requires an additional 3.9 in (10 cm) (approx.).
 **110/120V (60Hz) possible upon request.

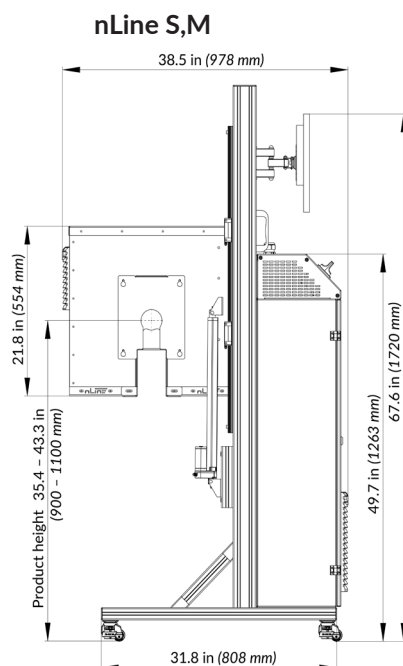

Approximate measurements. Drawing is not in scale.

Contact

nLine GmbH
 Muenchener Str. 14 | 85540 Haar (Munich), Germany
 Phone: +49 89 21 2000 | E-Mail: info@nline.ai | Web: www.nline.ai

Contact US

nLine USA Office | Warehouse & Service
 1201 Wesemann Dr. | West Dundee | IL 60118
 Phone: +1 224 449 2546 | E-Mail: info-US@nline.ai