




R2

Cargo Crossbars Guide

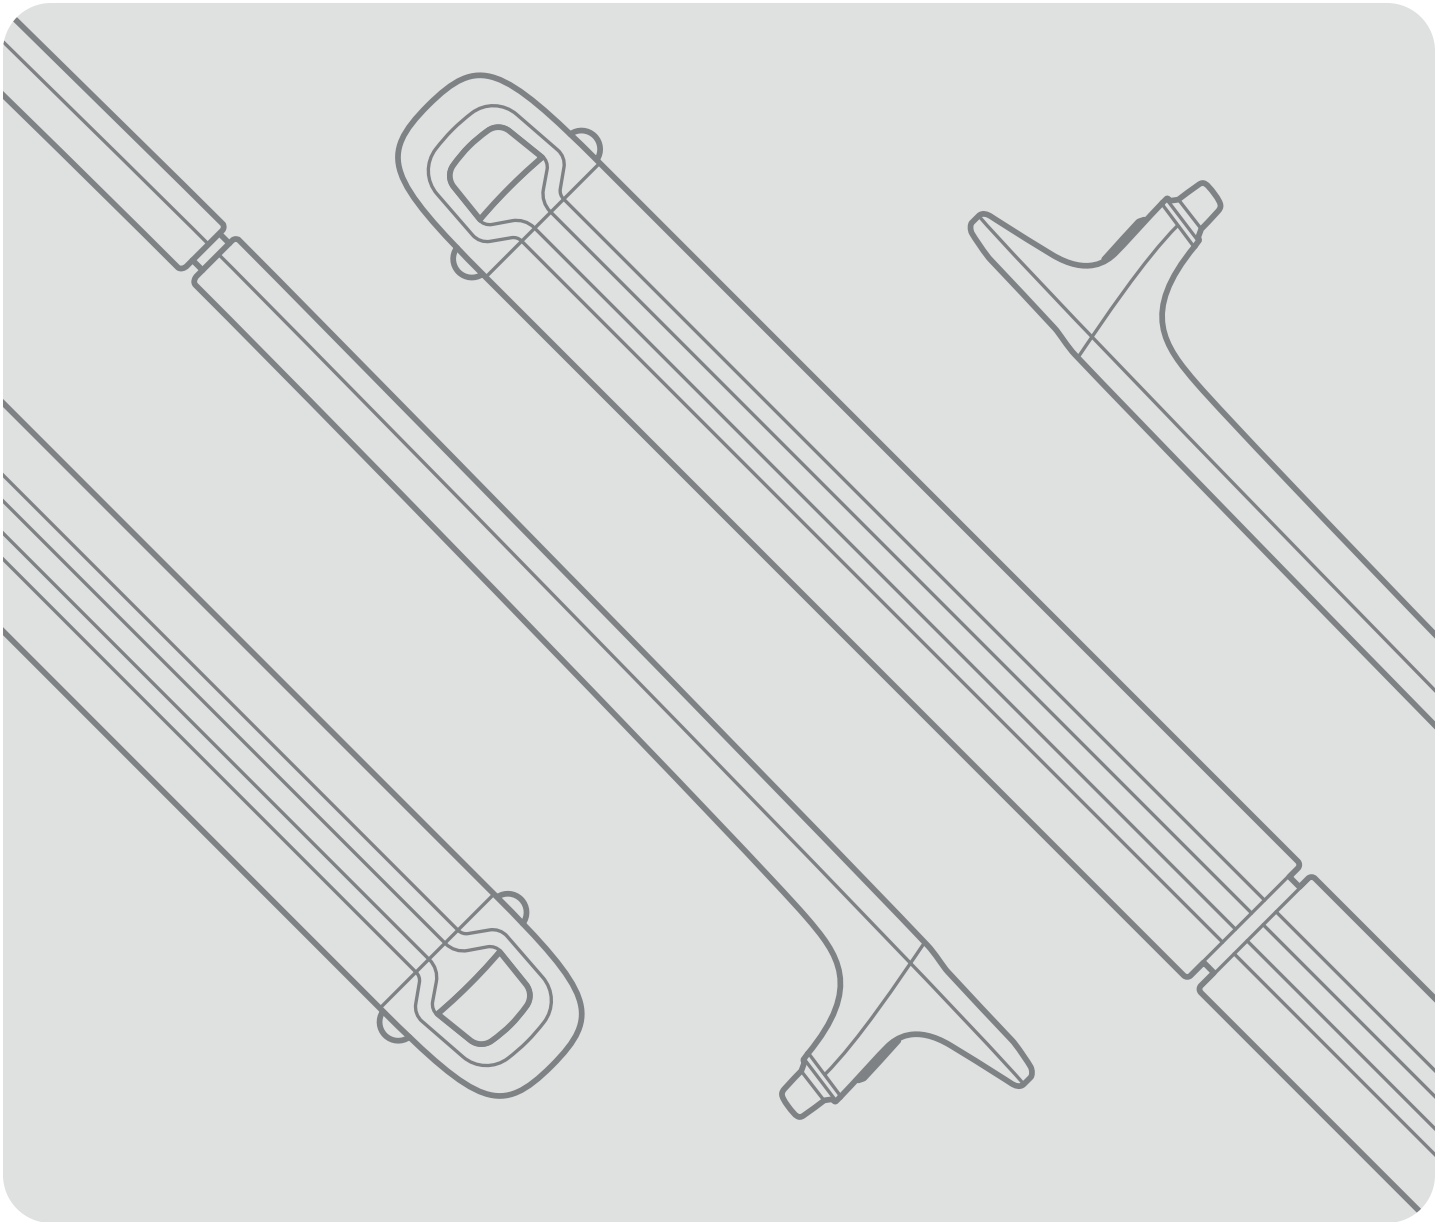

RIVIAN

© 2026 Rivian Automotive, LLC. All rights reserved.

All information in this document and all Rivian software is subject to copyright and other intellectual property rights of Rivian Automotive, LLC, its affiliates, or its licensors. This material may not be modified, reproduced, or copied, in whole or in part, without the prior written permission of Rivian Automotive, LLC, its affiliates, or its licensors. Unless indicated otherwise, all trademarks are owned and registered by Rivian Automotive, LLC, its affiliates, or its licensors in the United States and/or other countries. Please visit <https://www.rivian.com/legal/brand> for Rivian's trademarks and service marks.

The images provided in this document are for illustrative purposes only. Depending on the product details and market region, the information in this document may appear slightly different from your product.

Contents

Symbols Used in This Guide	4
About the R2 Cargo Crossbars	5
Install the R2 Cargo Crossbars	5
Lock the R2 Cargo Crossbars	7
R2 Cargo Crossbar Loading	8
Remove the R2 Cargo Crossbars	8
R2 Cargo Crossbar Maintenance	9
R2 Cargo Crossbar Latch Tuning	9
Adventure Gear Limited Warranty	9
Contact Rivian	10

Symbols Used in This Guide

The following are the meanings of symbols used in this guide:



DANGER

Risk of major injury such as

- fire
- chemical or poison
- crushing
- maiming
- death



WARNING

Risk of minor injury



CAUTION

Risk of

- damage to vehicle or property
- voiding warranty

IMPORTANT

Instructions to successfully complete a task

About the R2 Cargo Crossbars

The R2 cargo crossbars are only compatible for use with R2 vehicles. The set includes:


- 2 cargo crossbars
- 2 locking keys

Install the R2 Cargo Crossbars



CAUTION

- Carefully handle the cargo crossbars and heavy accessories to avoid breaking or damaging the glass roof panels.
- Two people are recommended for this procedure.
- Remove accessories from the cargo crossbars before you mount the crossbars on the vehicle.

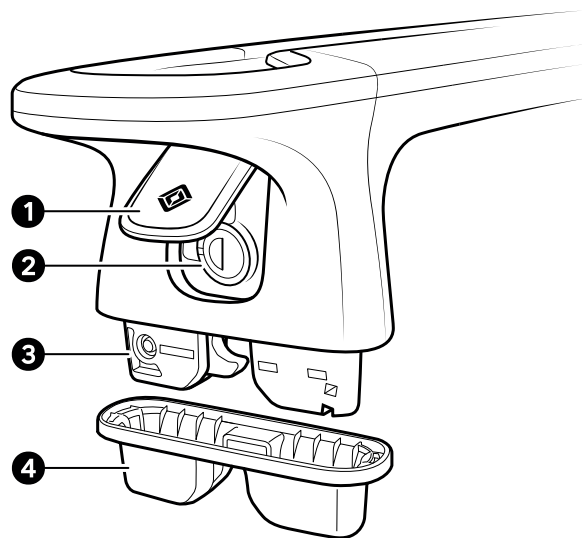


Item	Description
1	Paddle
2	Lock
3	Latch
4	Rubber boot




To adjust the width of one of the cargo crossbars:

1. Align the cargo crossbar by extending it over the accessory ports on the roof of the vehicle.

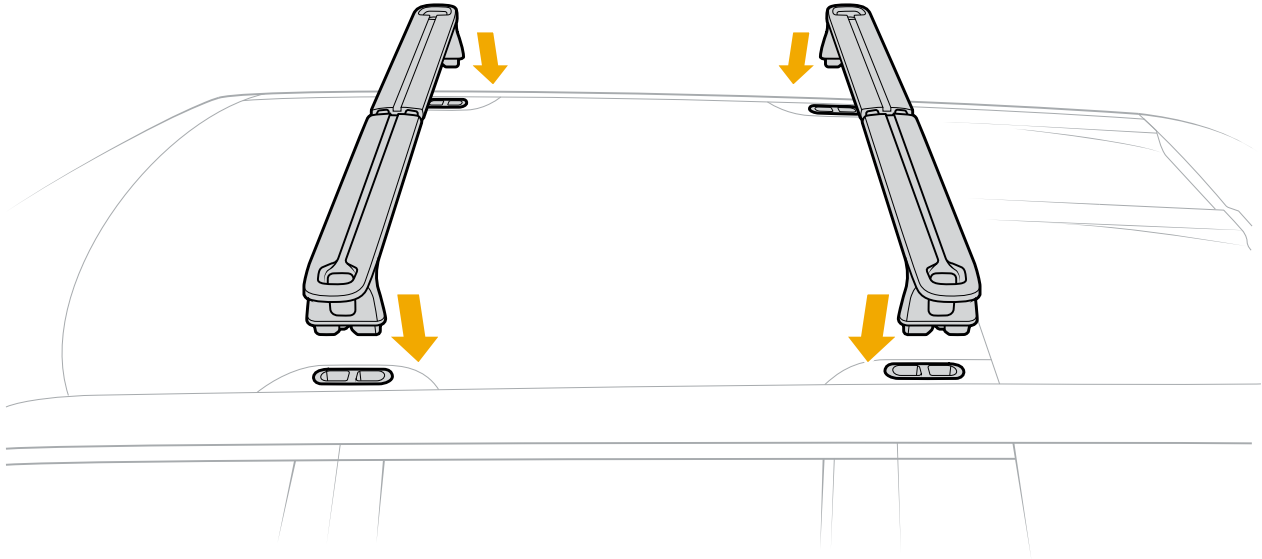

2. Lift up the cargo crossbar paddle while setting the cargo crossbar into the accessory ports.

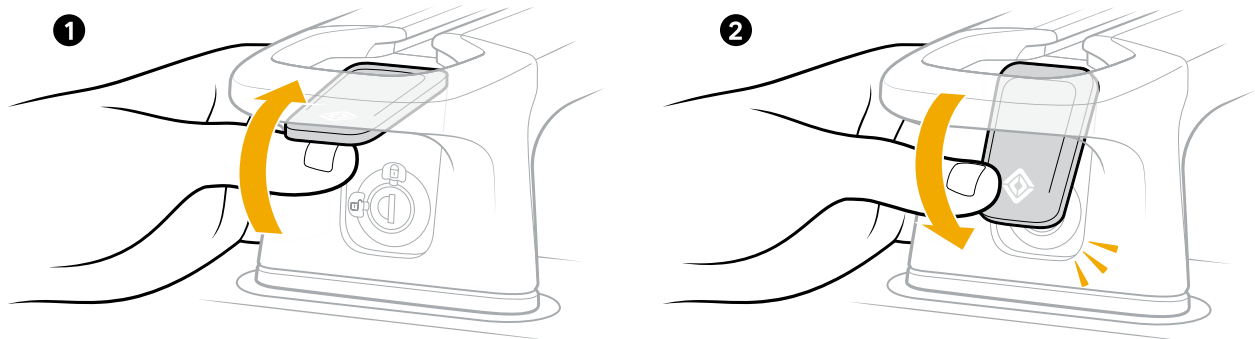

3. Center the cargo crossbar in the accessory port, then push the paddle down and in towards the crossbar tower.

You should hear an audible click indicating that the cargo crossbar is properly secured. You may need to apply some additional downward force to fully connect the latch into the accessory port.

**WARNING**

If you don't hear an audible click, the cargo crossbars may not be latched which could result in damage to your vehicle or injury to others while driving. Reinstall the cargo crossbars in the accessory port and confirm that you hear a click to verify the cargo crossbar is secure. If you are unable to achieve a latched position, contact Rivian for assistance.

4. Push firmly upwards on the grab handle at the end of the cargo crossbar to ensure your cargo crossbar is fully latched onto the vehicle.
5. Repeat steps 2-4 to latch the remaining crossbar ends into the accessory ports.


Lock the R2 Cargo Crossbars

1. Beginning with one end of the cargo crossbar, lift the paddle to access the lock.

IMPORTANT

Lift the paddle only to the point of resistance. Opening the cargo crossbar paddle further might unlatch the crossbar before its locked.

2. Lock the cargo crossbars with the key by turning clockwise (1).
3. Push the cargo crossbar paddle all the way down to cover the lock (2).

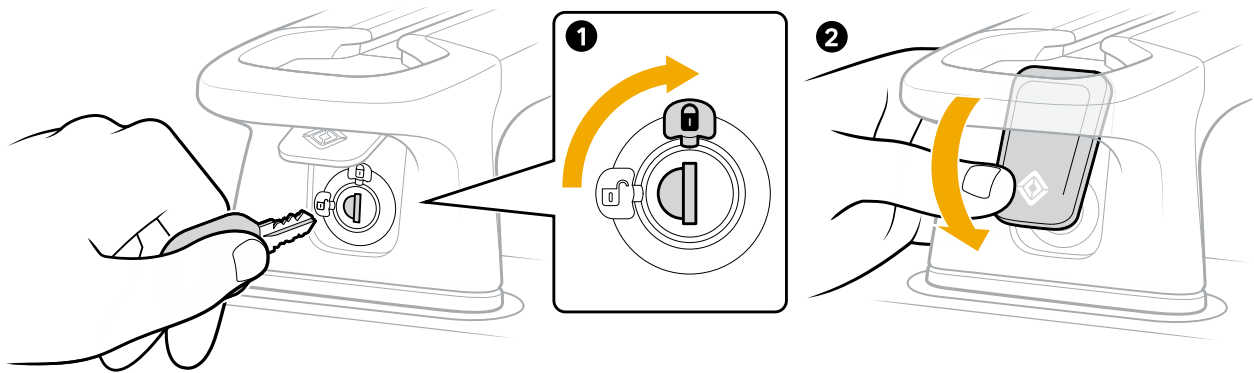

4. Repeat steps 1-3 on the remaining cargo crossbar ends to ensure the crossbars are fully locked.



WARNING

- Secure cargo crossbars and loads before and after driving, especially when you travel through rough terrain. Loose cargo crossbars and unsecured loads could cause a serious crash.
- Don't drill holes in the cargo crossbars. Only use manufacturer recommended parts and accessories.
- Modifications or accessories not provided by the manufacturer will void the manufacturer's warranty. The owner assumes liability for any damage or crashes caused by unauthorized modifications.

R2 Cargo Crossbar Loading

When using the R2 cargo crossbars be aware of the following:



DANGER

- Don't exceed the maximum specified load for the cargo crossbars.
- Be aware of overall vehicle payload capacities when you load the cargo crossbars.
- Refer to the Tire and Loading Information label and Load Carrying Capacity Modification label (if included) on the driver's door pillar for the maximum allowable vehicle payload.

The maximum dynamic (driving) load is 187 lbs (85 kg) per cargo crossbar pair.

The maximum static (parked) load is 600 lbs (272 kg) per cargo crossbar pair.

Evenly distribute the load on the cargo crossbars. Maintain a low center of gravity for the load.



DANGER

Any load that extends over the windshield must be secured to the front and rear of the vehicle, in addition to the cargo crossbars. Failure to do so can result in property damage, personal injury, or death.

Remove the R2 Cargo Crossbars

1. Beginning with one end of the cargo crossbar, lift the cargo crossbar paddle to access the lock.
2. Turn the key counterclockwise to unlock the cargo crossbar.
3. Lift the paddle while you raise the cargo crossbar to remove the cargo crossbar from the accessory port.



4. Repeat steps 1-3 for the remaining cargo crossbar ends. Carefully remove the crossbars from your vehicle.

R2 Cargo Crossbar Maintenance

Remove the crossbars when not in use. Clean the crossbars with a solution of water and standard car wash liquid.



CAUTION

Don't use cleaners that contain bleach, ammonium, or alcohol on the R2 Cargo Crossbars.

R2 Cargo Crossbar Latch Tuning

Over time, the crossbar latching mechanism may need adjustment. Contact Rivian if the crossbar doesn't securely latch in the accessory ports.

Adventure Gear Limited Warranty

Refer to the [Adventure Gear Limited Warranty Guide](#) for warranty information.

Contact Rivian

Still need help? Connect with us.

RIVIAN

Rivian Support

(888) RIVIAN1 / (888) 748-4261
rivian.com/support/contact