



# First responder - Quick guide




Always wear insulated rubber gloves.

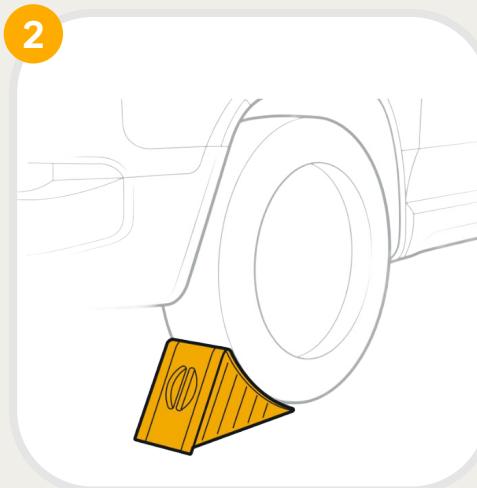


Secure the vehicle with wheel chocks/cribbing.

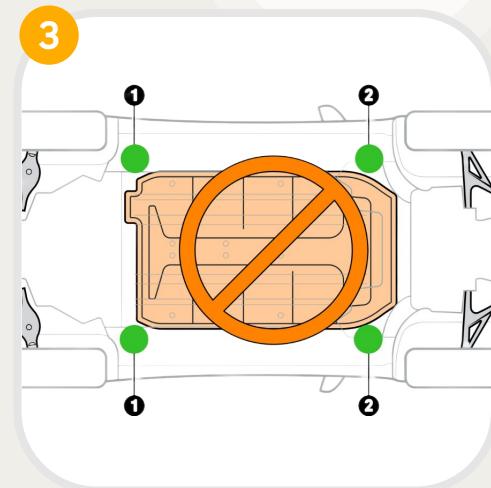


Only lift from the designated lifting points (green circles).

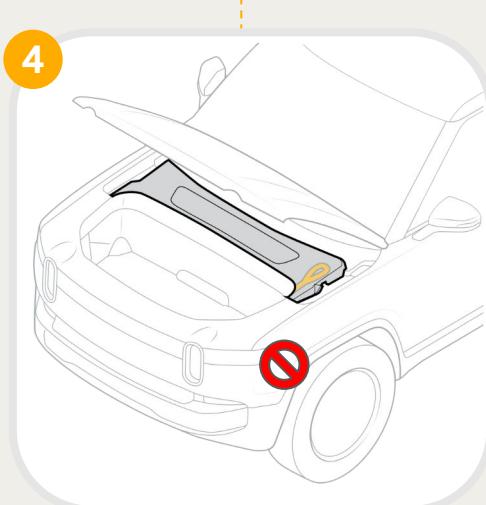

Open the hood (avoid cutting near the charge port).

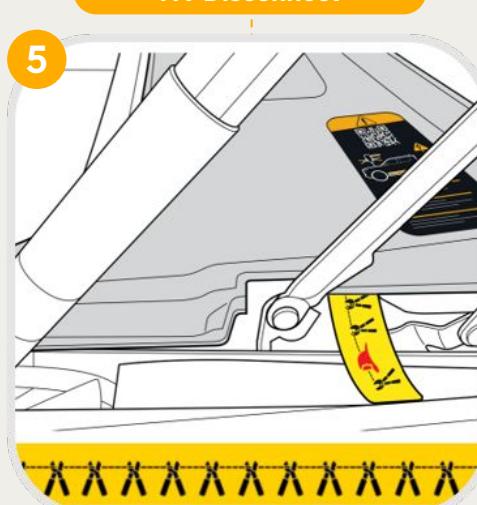

Locate the cutout loop near the windshield on the driver's side.

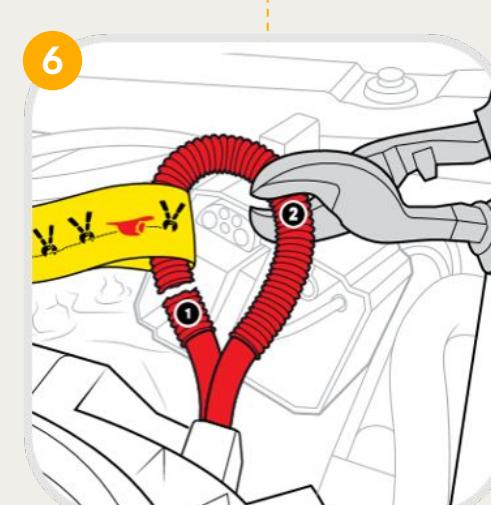

Cut the loop in two places and remove the cut section.

## Important notes & precautions

1. Do not cut the loop if the vehicle is on fire, submerged, or shows signs of potential fire.
2. Use a thermal imaging or infrared camera to locate fires and elevated temperatures.
3. If using a ram, do not use the floor of the vehicle inward of the sills.
4. Use a hydraulic cutter or reciprocating saw with a diamond blade to cut the high-strength steel around the doors.



**You could be injured, electrocuted, or die if you cut, pierce or damage the highlighted areas.**

**Always use a flatbed** to transport a disabled Rivian. If necessary, puncture all 4 tires to prevent a towing service from towing a Rivian with wheels on the ground.