

Genelec Document BBAGE081, Copyright Genelec Oy, 8-2008. All data subject to change without prior notice.



6020A LOUDSPEAKER SPECIFICATION

Maximum sound pressure level ¹	95 dB
Free field frequency response	66 Hz - 20 kHz (± 2.5 dB)
Drivers	Bass 105 mm (4") cone, Treble 19 mm (3/4") metal dome with DCW™
Amplifier power	Bass 20 W + Treble 20 W
Signal input connectors	XLR, RCA
Weight	3.7 kg (8.1 lb)
Dimensions (H x W x D)	242 mm (9 1/2") x 151 mm (6") x 142 mm (5 1/2") with Iso-Pod™
Controls	Volume Control, Bass Tilt, Treble Tilt, Autostart
Enclosure material and finish	Genelec MDE™ die cast aluminium enclosure available in Black, White or Silver finish

1) Maximum short term sine wave acoustic output on axis in half space, averaged from 100 Hz to 3 kHz @ 1 meter



5050A SUBWOOFER SPECIFICATION

Maximum sound pressure level ²	99 dB
Free field frequency response (± 3 dB)	Main 26 Hz - 85 Hz LFE 26 Hz - 120 Hz
Drivers	8" Active, magnetically shielded + 2 x 8" Passive radiators
Amplifier power	70 W
Signal input connectors	1 x XLR (LFE), 4 x RCA (L, C, R, LFE)
Signal output connectors	4 x RCA (L, C, R, LINK OUT)
Weight	15 kg (33 lb)
Dimensions (H x W x D)	332 mm (13 1/16") x 325 mm (12 7/16") x 330 mm (13")
Controls	Input sensitivity, Autostart, Bass Roll-Off, Phase
Enclosure finish	MDF with black paint finish

2) Maximum short term sine wave SPL output averaged from 30 to 85 Hz, measured in half space at 1 meter




www.genelec.com



GENELEC®

6020A Active Loudspeaker
5050A Active Subwoofer

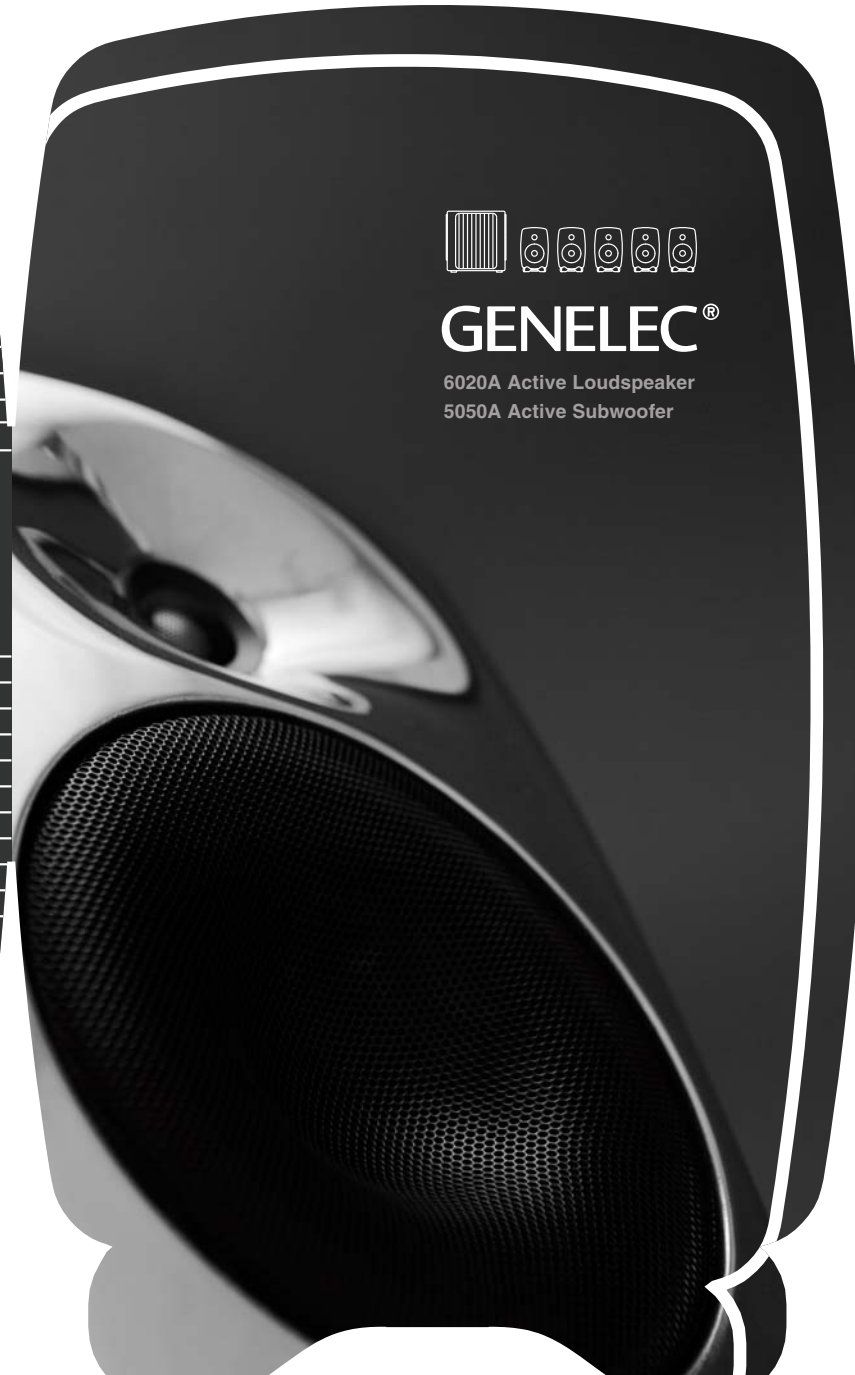



Designed for Audio Pleasure

For more than 30 years Genelec's active loudspeakers have been trusted by top recording studios and broadcasting facilities all over the world. Genelec products are designed to reproduce audio with astounding precision in the most demanding applications.

Active loudspeaker design is also a perfect solution for home use, where high quality audio components have to blend smoothly with interior design. Active loudspeakers have their own integrated amplifiers so they can be connected directly to many types of audio players making separate amplifiers redundant.

Genelec 6020A – Small and Sensational

Compact and discrete, the Genelec 6020A active loudspeaker is capable of creating a natural and sensational soundstage. The elegantly curved aluminum enclosure designed by famous Finnish industrial designer Harri Koskinen eliminates edge diffraction, thereby improving sound quality one step further. With both RCA and XLR connectors this small and powerful loudspeaker is easy to integrate into your home audio system.

Genelec 5050A – The Bottom End

The Genelec 5050A active subwoofer is designed to complement the low frequency response of the Genelec 6020A loudspeaker. The 6020A and 5050A package offers a dynamic, detailed and refined sound field with a flat and wide frequency response extending from 26 Hz up to 20 kHz. Because the 5050A is designed to work with the 6020A as a complete system, installation and set-up is very quick and easy for any stereo or multichannel application.

>> Visit www.genelec.com for more information <<

