

Drill-Tec™ RhinoBond® TPO XHD Plate

PRODUCT DESCRIPTION

Drill-Tec™ RhinoBond® TPO XHD Plate is designed for use as the key element to the RhinoBond® single-ply membrane roofing attachment system. Drill-Tec™ RhinoBond® TPO XHD Plate is a 3" (76 mm) diameter Galvalume® steel plate with a special thermoplastic polyolefin (TPO) coating. When used with the RhinoBond® magnetic induction welding tool and appropriate Drill-Tec™ fasteners, The Drill-Tec™ RhinoBond® TPO XHD Plate will attach both insulation (or other substrate) and the EverGuard® TPO membrane to a structure's roof deck system. FM 1-90 or higher rating can be obtained with appropriate fasteners.

APPLICATION INSTRUCTIONS

Application

Drill-Tec™ RhinoBond® TPO XHD Plate is used to attach rigid insulation to roof decks. The special TPO coating on the plates allows for EverGuard® TPO membrane to be welded to each plate using the RhinoBond® Magnetic Induction Welding Tool. Insulation and membrane are attached using one fastener to create a durable roofing system. Typical application to steel or wood deck will use a Drill-Tec™ XHD # 15 Roofing Fastener or Drill-Tec™ SXHD # 21 Roofing Fastener. Fastener must be sized to penetrate steel decks a minimum of 3/4" (19.1 mm). Drive the fastener until the screw head is seated securely.


TreadSafe® is a tube fastening system designed for compressible insulation. When used in conjunction with a specially designed RhinoBond® plate, TreadSafe® provides an insulation and membrane attachment system for securing TPO roofing membranes.* For best results, the minimum insulation thickness should be 2 in. (51 mm) to accommodate deflection.

Note: Be careful not to overdrive the fastener and fracture the skin of the insulation. Fastener must be tight enough so that plate does not turn or move.

CODE APPROVALS



MONIER MALAYSIA SDN. BHD. (19163-M)
 Suite 12W, 12th Floor, Wisma FGV, Jalan Raja Laut, 50350 Kuala Lumpur
 T (+60) (3) 21760600 F (+60) (3) 26040335 Toll Free: 1800 88 0865
 roofing-malaysia@bmigroup.com
bmigroup.com/my

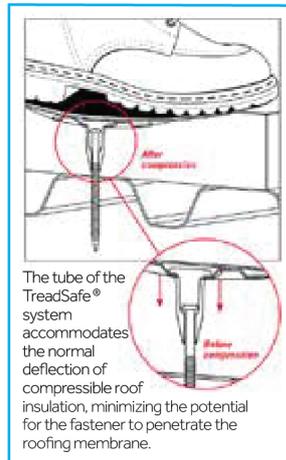

ADVANTAGES

- Drill-Tec™ RhinoBond® TPO XHD Plate reduces overall installation time for a single-ply roofing system.
 - The Drill-Tec™ RhinoBond® TPO XHD Plate is a 3" (76 mm) diameter Galvalume® steel plate with a special thermoplastic polyolefin (TPO) coating.
 - Use to attach insulation using conventional techniques. For best results, use a variable speed 0-2500 rpm screw gun.
 - Plate sits flat on EnergyGuard™ Polyiso, Securock® Roof Board, and other high-density insulations.
- * For use with approved TPO membranes only.

PRODUCT INFORMATION

SKU #	Size	Bucket	Weight	Description
4574	3" (76 mm)	500	43 lbs (19.5 kg)	TPO Coated Plate
4537	3" (76 mm)	500	43 lbs (19.5 kg)	TPO Coated Plate for #21 Fastener
4574TSTPO	3" (76 mm)	500	43 lbs (19.5 kg)	TreadSafe® TPO Coated Plate

Note: RhinoBond® is a registered trademark of OMG. Securock® is a registered trademark of USG.