

Drill-Tec™ Steel Plates

PRODUCT DESCRIPTION

Drill-Tec™ Steel Plates are made of Galvalume® coated steel. The round design provides an even distribution of loads and eliminates sharp corners that can damage the insulation or membrane. Drill-Tec™ 2 3/8" and 2 3/4" plates should be used for lap seam fastening. Drill-Tec™ 3" plates should be used when fastening insulation. These plates are designed to be used with Drill-Tec™ fasteners.

CODE APPROVALS



PHYSICAL DATA

2" Barbed Plate

Application: Attaches EverGuard® membrane to the substrate.

Fastener: Drill-Tec™ HD #14 Fasteners, XHD #15 Fasteners and Drill-Tec™ CD-10 Fasteners.

2" Double-Barbed Plate

Application: Attaches EverGuard® membrane to the substrate.

Fastener: Drill-Tec™ XHD #15 Fasteners, SXHD #21 Fasteners and Drill-Tec™ CD-10 Fasteners.

2 3/8" XHD Barbed Seam Plate

Application: Attaches EverGuard® membrane to the substrate.

Fastener: Drill-Tec™ XHD #15 Fasteners and Drill-Tec™ CD-10 Fasteners.

2 3/4" Super XHD Double-Barbed Seam Plate

Application: Attaches EverGuard® membrane to the substrate.

Fastener: Drill-Tec™ SXHD #21 Fasteners and Drill-Tec™ CD-10 Fasteners.

3" Galvalume® Plate

Application: Attaches insulation to the substrate.

Fastener: Drill-Tec™ Standard, #12 Fasteners, HD #14 Fasteners, CD-10 Fasteners, Fluted Nail.

Lite-Deck Plate


Application: Attaches insulation to gypsum, Tectum® and lightweight concrete decks.

Fastener: Drill-Tec™ Lite-Deck Fastener.

Base Sheet Plate

Application: Attaches base sheets to lightweight insulating concrete and various gypsums.

Fastener: Drill-Tec™ Standard or 1.2 Base Sheet Fastener.

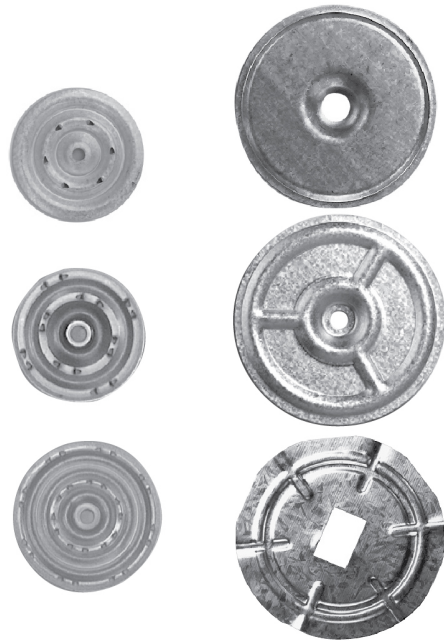

PRODUCT INFORMATION

SKU #	Plate	Diameter	Packaging	Weight
8676	2" Barbed Plate	2"	1000	29 lbs
46DB	2" Double-Barbed Plate	2 1/8"	1000	34 lbs
8678	2 3/8" XHD Barbed Seam Plate	2 3/8"	1000	45 lbs
8679	2 3/4" Super XHD Plate	2 3/4"	500	37 lbs
4577	3" Galvalume® Plate	2 7/8"	1000	37 lbs
457B	3" Lite-Deck Plate	3"	500	19 lbs
45JJ	3" Base Sheet Plate	3"	1000	46 lbs

In view of innovation, the specifications are subject to change without any prior notice and in the event of such changes, BMI shall ensure that the new specifications are equivalent if not better.

MONIER MALAYSIA SDN. BHD. (19163-M)

Suite 12W, 12th Floor, Wisma FGV, Jalan Raja Laut, 50350 Kuala Lumpur
 T (+60) (3) 21760600 F (+60) (3) 26040335 Toll Free: 1800 88 0865
 roofing-malaysia@bmgigroup.com
bmgigroup.com/my

Drill-Tec™ Plastic Plates

PRODUCT DESCRIPTION

Drill-Tec™ 3" plates should be used when fastening insulation. All Drill-Tec™ plates are round and designed to be used with Drill-Tec™ fasteners.

CODE APPROVALS



PHYSICAL DATA

3" Polypropylene Plastic Plate

Application: Attaches insulation to the substrate.

Fastener: Drill-Tec Standard, Heavy Duty, CD-10, Fluted Nail or Toggle Bolt fastener.

3" Polypropylene Locking Plastic Plate

Application: Attaches insulation to the substrate.

Fastener: Drill-Tec Standard, Heavy Duty or Toggle Bolt fastener.

PRODUCT INFORMATION

SKU #	Plate	Diameter	Packaging	Weight
4578	3" Plastic Plate	3 1/16"	1000	25 lbs
45JK	3" Locking Plastic Plate	3 1/16"	1000	25 lbs

In view of innovation, the specifications are subject to change without any prior notice and in the event of such changes, BMI shall ensure that the new specifications are equivalent if not better.

MONIER MALAYSIA SDN. BHD. (19163-M)

Suite 12W, 12th Floor, Wisma FGV, Jalan Raja Laut, 50350 Kuala Lumpur

T (+60) (3) 21760600 F (+60) (3) 26040335 Toll Free: 1800 88 0865

roofing-malaysia@bmigroup.com

bmigroup.com/my