



MATERIAL COMPOSITION

Wakaflex®

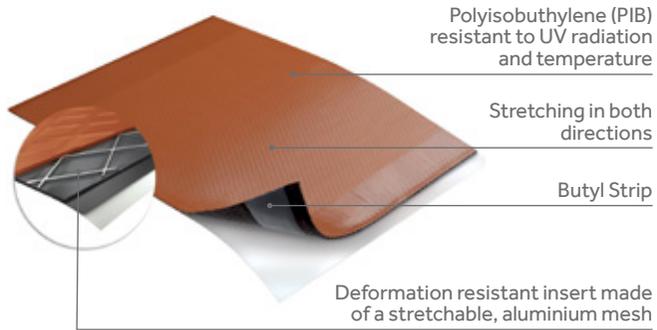

Connection Strip

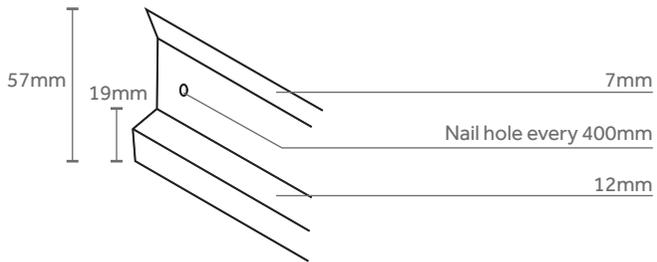

- Easy to use, DIY solution
- 100% leak-proof for long lasting water tightness
- Highly stretchable coated aluminium

APPLICATIONS ON TILED ROOFS

- Side and horizontal wall connections
- Dormers
- Chimneys*

**Not suitable for metal chimney applications due to rising temperatures of above 80°C and no surface area to apply Connection Strip.*



BRANCHES

Bloemfontein

051 492 0210

Brits

010 492 8800

Cape Town

021 492 2230

Durban

031 565 3260

East London

043 492 0041/2

Germiston

010 492 8780

Nelspruit

013 492 1930

Pietermaritzburg

031 489 9880

Polokwane

015 495 0070

Port Elizabeth

041 492 0130

Richards Bay

035 797 2160

BMI Coverland (Pty) Ltd

Block 6
Constantia View Office Estate
2 Hogsback Avenue
Quellerina
011 222 7300
info.sa@bmigroup.com

www.bmigroup.com/za

www.coverland.co.za

Wakaflex®




BMI Coverland

**A premium quality, easy to
install wall flashing solution**


www.bmigroup.com/za

Premium grade dry-fix wall flashing solution that ensures waterproofing on critical areas of the roof.

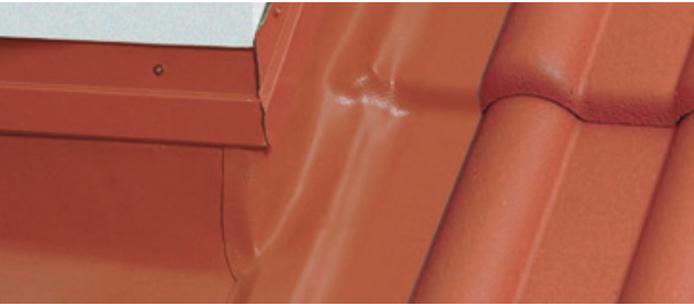

Wakaflex® is the practical approved universal product for professional abutments at chimneys, walls and other rising structures. The surface of Wakaflex® is dirt-repelling and smooth, making it an excellent choice to increase the aesthetic value of your roof. Its rollable 5-sheet laminate has a unique self-welding feature that allows for easier and better finishing around any roof tiles and even complicated areas, which saves up to 50% time during installation compared with other products.

Connection Strip is nailed/screwed onto the Wakaflex® and the wall to provide additional sealing against water ingress.

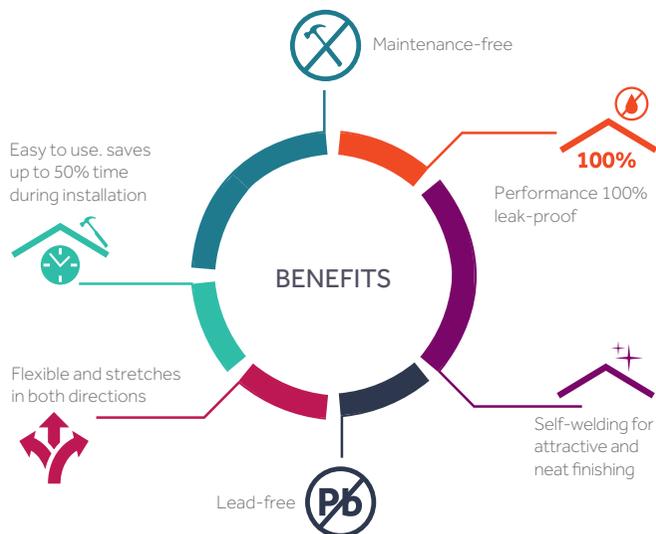

PRODUCT DATA




WAKAFLEX®

Material	Polysobuthylene (PIB) with aluminium grid and butyl strip
Roll dimensions (m)	0.28 (W) x 5 (L)
Stretch factor	approx. 50% (lengthwise) approx. 15% (crosswise)
Weight (kg/m²)	approx. 3,24
Fire resistance	Class E
Min. roof pitch	10°
Surface Colours	Terracotta, brown and black

Recommended to seal with Connection Strip in accordance with application instructions

CONNECTION STRIP

Material	Clean colourbond steel
Dimensions (m)	2.4 (L) x 0.6 (W)
Colour	Double-sided brown and terracotta

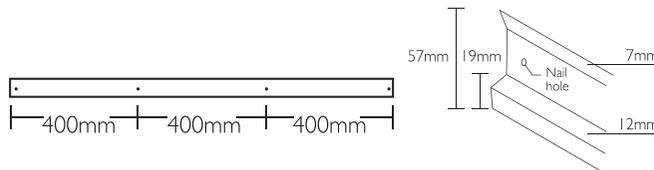

APPLICATION

Preparation

Ensure that the tile surface is dry, free from dirt and dust. Plastered walls must first be primed and painted.



Dormer treatment



Chimney treatment



Using ordinary tools, measure the appropriate width required to seal the abutment



Release the butyl strip against the wall first ensuring a straight line along the wall



Then release the butyl strip on the tile side and mould onto the clean tile surface



Where the corners intersect ensure sufficient overlap



Apply a Connection Strip securely with non-corrosive screws to the upper edge of Wakaflex, sealing off with Coverfill between the wall and Connection Strip



Wakaflex as a wall connection with pre-assembled elements