INSTALLATION GUIDELINES
LP® MULTI-USE PANELS (Primed Gray)

GENERAL:

- At the time of manufacture, Multi-Use Panels meet or exceed the performance standards set forth in the current version of Voluntary Product Standard PS 2 for the APA 11/32 Performance Category, 0/24 Span Rating, Exposure 1.
- Multi-Use Panels are a utility panel intended for a variety of interior and exterior applications.
- Multi-Use Panels are NOT intended to be used as siding on residential or accessory structures governed by building codes.
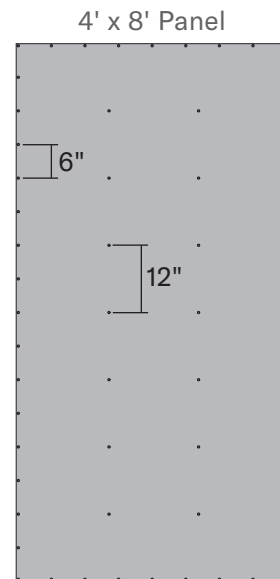
STORAGE:

- Store off ground, well supported on a flat surface under a roof or separate waterproof covering.
- Keep panels clean and dry. Inspect prior to application.

4' x 8' Panel

NAILING INSTRUCTIONS:

- Recommend a 2 inch long by 0.113 inch shank diameter nail to fasten panels to studs.
- Penetrate studs a minimum of 1-1/2 inches (38 mm).
- Do not install Multi-Use Panels on studs spaced more than 24 inches o.c. (610 mm).
- Recommend nailing 6 inches o.c. (152 mm) around perimeter and 12 inches o.c. (305 mm) in the field.
  - ○ For panels installed in an exterior application, a hot-dip galvanized nail is recommended.

FINISHING INSTRUCTIONS:

- Paint all panel ends, edges, and field cuts during installation.
- Apply paint as soon as possible.
  - ○ Follow the paint manufacturer's application and maintenance instructions.
- For best results use a high-quality 100% acrylic paint, specially formulated for use on wood and engineered wood substrates is highly recommended; oil paint is acceptable.
  - ○ Follow the paint manufacturer's application and maintenance instructions.
  - ○ Do not use stain or vinyl-based paint (like vinyl acetate, or PVA).

LP
BUILDING SOLUTIONS

LPZB0851   8/2020