


DURABLE SOLUTIONS FOR BETTER SHEDS.

LP Outdoor Building
Solutions®

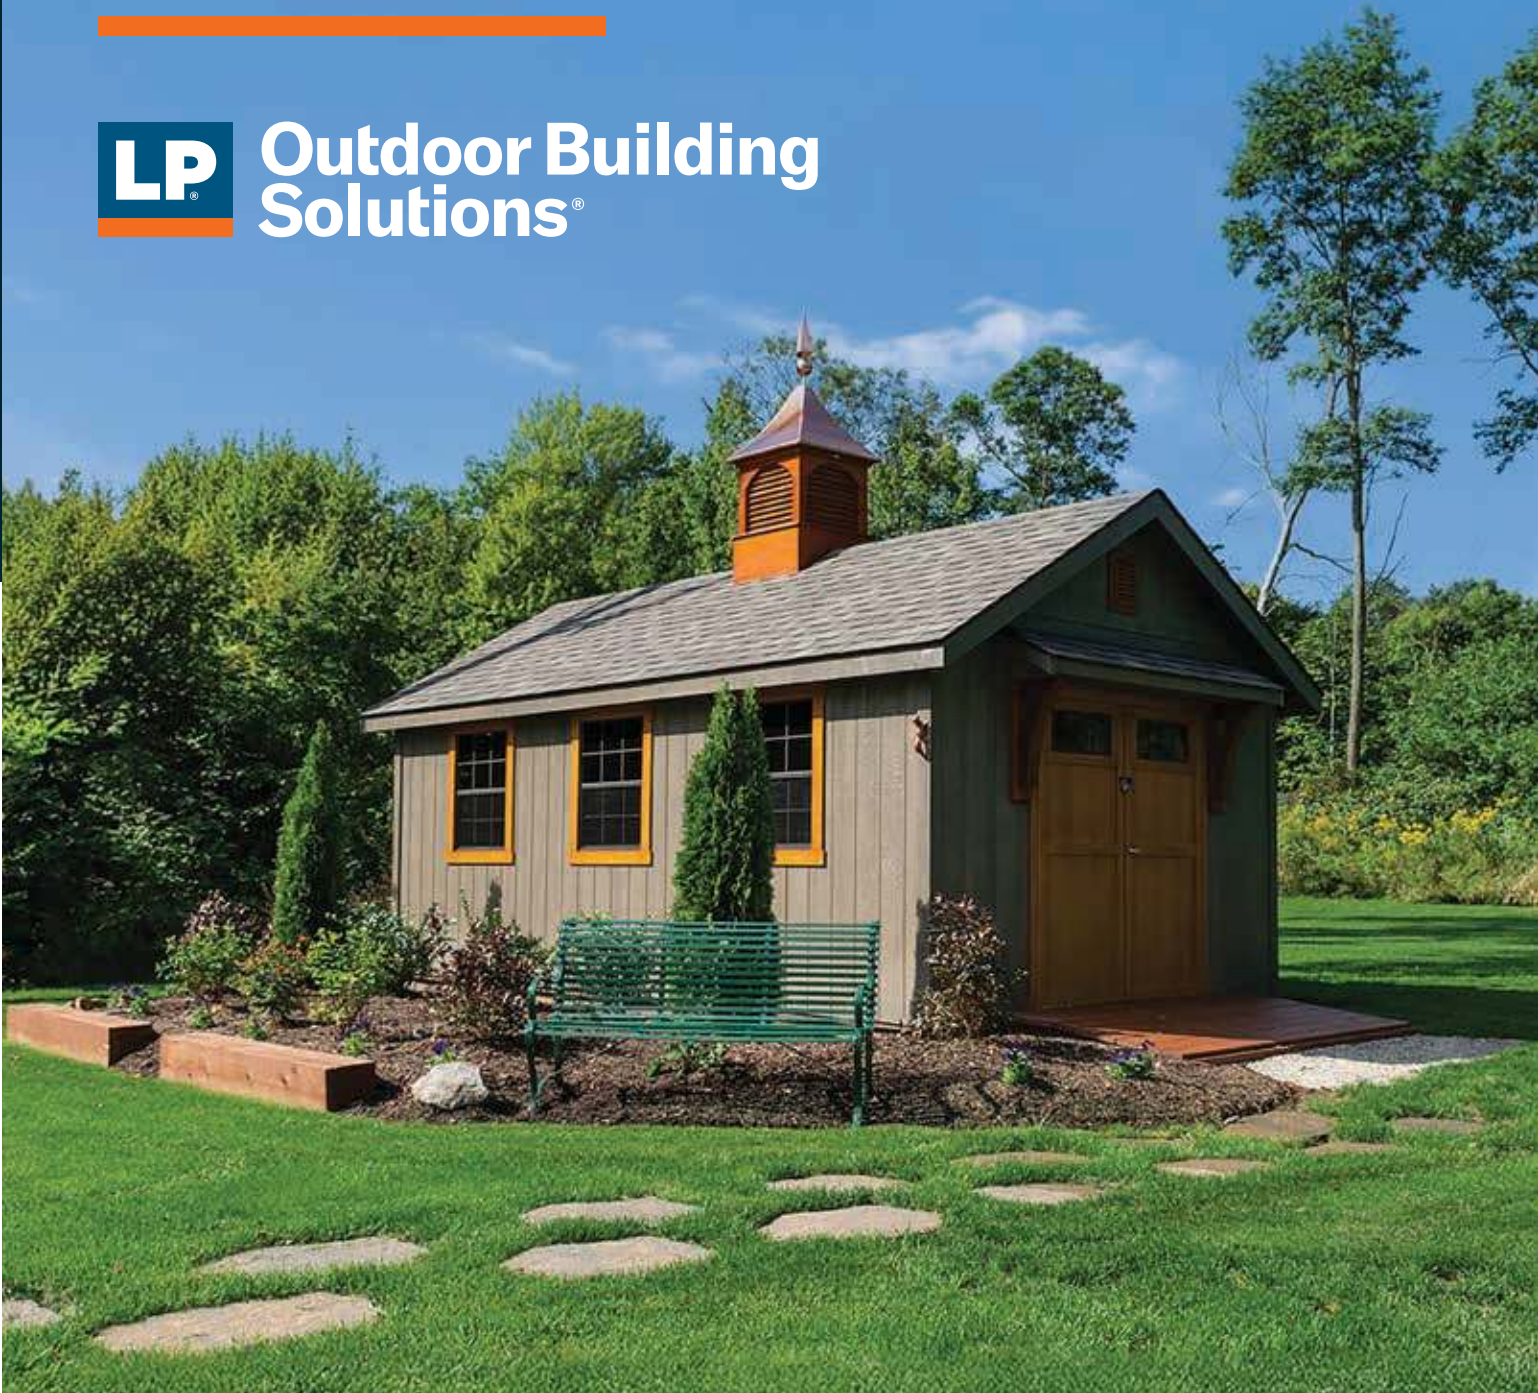

LP® Outdoor Building Solutions®
Product Guide & Specifications

LPShed.com



LP® SmartSide® Lap and Trim

A better shed
begins here.

LP® OUTDOOR BUILDING SOLUTIONS®

Engineered to Impress	04
Portfolio Solutions	06
Your Complete Shed System	08

LP® SMARTSIDE® TRIM & SIDING

The LP® SmartSide® Brand	10
Durability	12
Warranty	15
Efficiency	16
Sustainability	18
Options	20
Products:	
Panel Siding	22
Shed Panels with Interior Finishes	24
Vertical Siding	26
Lap Siding	28
Nickel Gap Siding	30
Shake Lap Siding	32
Soffit	34
Trim	36
Accessories	38

LP® PROSTRUCT® FLOORING

The LP® ProStruct® Brand	40
Everyday Flooring	42
Premium Flooring	44

LP® SILVERTECH® ROOF SHEATHING

The LP® SilverTech® Brand	46
Everyday Roofing	48
Premium Roofing	50

SPECIFICATIONS

LP® SmartSide® Trim & Siding	
4" o.c. and 8" o.c. Panel Siding	54
Shed Panels with Interior Finishes	56
No Groove Panels	58
Vertical Siding	60
Lap Siding	61
Nickel Gap Siding	62
Shake Lap Siding	63
Closed Soffit	64
Vented Soffit	66
Trim	68
Accessories	70
LP® ProStruct® Flooring	
Everyday Flooring	72
Premium Flooring	75
LP® SilverTech® Roof Sheathing	
Everyday Roofing	76
Premium Roofing	77
Support	78

ENGINEERED TO IMPRESS

BUILT TO STAND OUT AND STAND STRONG

LP® Outdoor Building Solutions® offers one of the industry's most comprehensive portfolios of siding, flooring, and roofing solutions for sheds — engineered to work together for long-lasting durability. Our engineered wood products are designed to help you build beautiful, resilient outdoor structures, while offering installation efficiencies that can add value to your business.



From everyday builds to premium projects,
we've got a solution to match your needs.



ONE PORTFOLIO. THREE SOLUTIONS.

A complete system of
siding, flooring, and roofing
solutions engineered to
work together for efficiency
and lasting performance.

LP Outdoor Building
Solutions®



LP® SmartSide® Trim & Siding

Durable trim and siding products
engineered for long-lasting performance

Shed-specific panels feature SmartFinish®
or SilverTech® interior overlays



LP® SmartSide® Panel Siding



LP® SmartSide® Panel with SmartFinish® Overlay



LP® SmartSide® Panel with SilverTech® Overlay



LP® Everyday Series™ Shed Flooring & Roofing

Dependable, economical flooring and roofing
products made for everyday shed builds

A value-added step up from
commodity OSB or plywood



LP® ProStruct® Everyday Series™ Flooring: Dark Brown, Two-Tone, Gray



LP® SilverTech® Everyday Series™ Roof Sheathing



LP® Premium Series Shed Flooring & Roofing

High-performance shed flooring
and roofing products with enhanced
durability and premium aesthetics

Engineered for elevated build quality



LP® ProStruct® Flooring with SmartFinish® Overlay



LP® SilverTech® Premium Roof Sheathing

YOUR COMPLETE SHED SYSTEM



Engineered performance, from floor to roof.

Radiant Barrier Shed Roof Sheathing

Everyday and premium roofing solutions for cooler, brighter sheds



Shed Flooring

Everyday and premium flooring solutions for durable performance and a clean interior look



Available in Dark Brown, Gray, and Two-Toned



An LP® Premium Series product



Trim & Fascia

Durable trim solutions for adding finishing detail



Siding

A comprehensive lineup of durable siding solutions in a variety of styles and profiles

Offerings include shed-specific panels with integrated SmartFinish® or SilverTech® overlays



TRIM & SIDING

A REPUTATION OF PERFORMANCE

For more than 25 years, the LP® SmartSide® brand has earned a reputation as one of the highest-performing and most preferred trim and siding brands due to its Advanced Durability for Longer Lasting Beauty®.

Ideal for homes and outdoor buildings alike, LP® SmartSide® Trim & Siding products are engineered for lasting performance, designed for efficient installation, and inherently sustainable.



Read on to learn more about the impressive durability of LP SmartSide products



DURABILITY

LP® SmartSide® products help deliver superior resistance against:

- Moisture intrusion from many weather conditions
- Impacts from hail
- Damage from freeze/thaw cycles
- Damage from termites
- Damage from fungal decay



Refer to limited warranty at LPCorp.com/literature for complete details, including important limitations and exclusions.

Image edited for dramatization



DURABLE SIDING. SMART TECHNOLOGY.

The exceptional durability of LP® SmartSide® Trim & Siding is built on engineered wood strand technology and LP's proprietary SmartGuard® manufacturing process.

Made using precisely-sized, shaped, and layered wood strands from responsibly-sourced logs, every LP SmartSide product is treated to the core with an advanced formula of adhesive resins, water-resistant waxes, and zinc borate. Then, a water-resistant, resin-saturated overlay is permanently bonded to the product.

Our SmartGuard process takes durability to the next level, arming LP SmartSide products to help protect the beauty and integrity of your shed's exterior.

See how LP SmartSide products are made at [YouTube.com/LPSmartSide](https://www.youtube.com/LPSmartSide)

THE DURABILITY DIFFERENCE




Resists Impacts from Hail

Results of third-party testing commissioned by LP demonstrate that LP® SmartSide® cedar texture lap siding resists hail damage better than fiber cement siding and vinyl siding. In fact, the LP SmartSide limited warranty covers impacts from hail up to 1.75" in diameter.



Stays Put in High Winds

LP SmartSide Lap Siding is designed to withstand tough storms with wind gusts of up to 200 miles per hour. Refer to ESR-1301 or PR-N124.



Resists Cracking from Heat and Sun Exposure

Thanks to industrial-grade binders and resins and a durable primed overlay, LP SmartSide siding has been shown to remain strong when well maintained, even after prolonged exposure to intense sunlight.



Resists Damage Through Freeze-Thaw Cycles

Many substrates delaminate when water is absorbed, then freezes and expands. LP SmartSide products, made with the SmartGuard® process, resist water and therefore are less subject to freeze-thaw cycle damage.



Resists Fungal Decay

LP has conducted testing since 1996 on LP SmartSide Trim & Siding near Hilo, Hawaii. The climate's high average temperature, high levels of humidity, and heavy annual rainfall make it a perfect breeding ground for termites, moisture, and fungal decay. Yet, our exterior exposure testing continues to validate that LP SmartSide siding performs over time.




Resists Termite Damage

To put LP SmartSide products to the test, we exposed samples to Formosan termites, widely recognized as one of the world's most destructive pests. Each sample was placed on a grid, surrounded by untreated bait samples, then laid directly on top of termite colonies. The bait samples were damaged within three months — but even after a number of years, the LP SmartSide siding exhibited no structural damage.

BIG-TIME BREAK RESISTANCE

Testing shows that LP® SmartSide® products offer outstanding impact resistance — against everyday bumps and beyond.

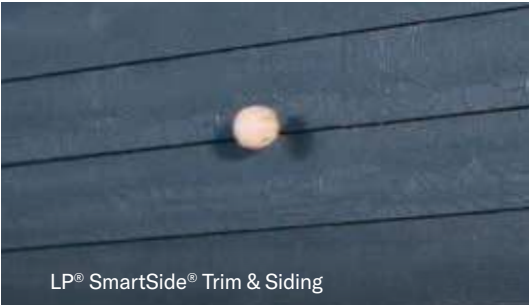

LESS BREAKAGE FOR EASIER INSTALLATION

LP SmartSide siding is less prone to breakage than other, more rigid materials like fiber cement. It's also lighter per square foot than fiber cement siding and can be carried by just one person without breaking under its own weight.

IMPRESSIVE IMPACT RESISTANCE

You don't need to be an expert to see the difference in durability. When pitting 'kid v. wall,' LP® SmartSide® Trim & Siding outperformed fiber cement and vinyl — showing LP SmartSide Trim & Siding can endure even unexpected impacts that fall outside of the warranty.

WARRANTY

REST EASY. IT'S LP® SMARTSIDE® SIDING.

All LP® SmartSide® Trim & Siding products are backed by an industry-leading transferable prorated limited warranty:

- 50-year substrate
- 5-year labor and materials

The LP SmartSide limited warranty offers protection against damage from hail up to 1.75" in diameter, fungal decay and termites, and buckling, cracking, peeling, and chipping of the substrate.



Warranty Info



Refer to limited warranty at [LPCorp.com/literature](https://www.lpcorp.com/literature) for complete details, including important limitations and exclusions.



EFFICIENCY



ENGINEERED FOR FAST & EASY BUILDS

LP® SmartSide® products can help you build fast and efficiently. From light weights to long lengths to advanced durability, they're designed to help boost productivity, so you can complete more sheds quickly.

A SMART CHOICE WITH BENEFITS THAT STACK UP

- Works and cuts like traditional wood
- Easy to cut, transport, and install
- Free of knots, patches, and face voids
- Resists breakage, helping minimize material waste and installation delays



THE LP® SMARTSIDE® DIFFERENCE

Lighter Weights:

LP® SmartSide® lap siding is 45% lighter weight per square foot than fiber cement.



Longer Lengths:

LP SmartSide lap siding's 16-foot lengths may lead to fewer seams and cuts compared to fiber cement's 12-foot lengths.



Learn more about how LP® SmartSide® products stack up to the competition



ALL-IN-ONE SHED PANELS THAT DO MORE

Take efficiency even further with panels that deliver siding, structural performance, and interior finish in one step. Choose LP® SmartSide® panel with SmartFinish® overlay for a clean look or LP® SmartSide® panel with SilverTech® radiant barrier for a cooler, brighter shed.




SUSTAINABILITY

The way we build today matters for tomorrow.

LP® SmartSide® Trim & Siding is an inherently sustainable, carbon-negative solution that can help you reduce the environmental impact of your builds.



LP® SmartSide® products offer a crucial environmental benefit: They're made to withstand the test of time. Durable materials help reduce waste and contribute to a more sustainable future for our planet.

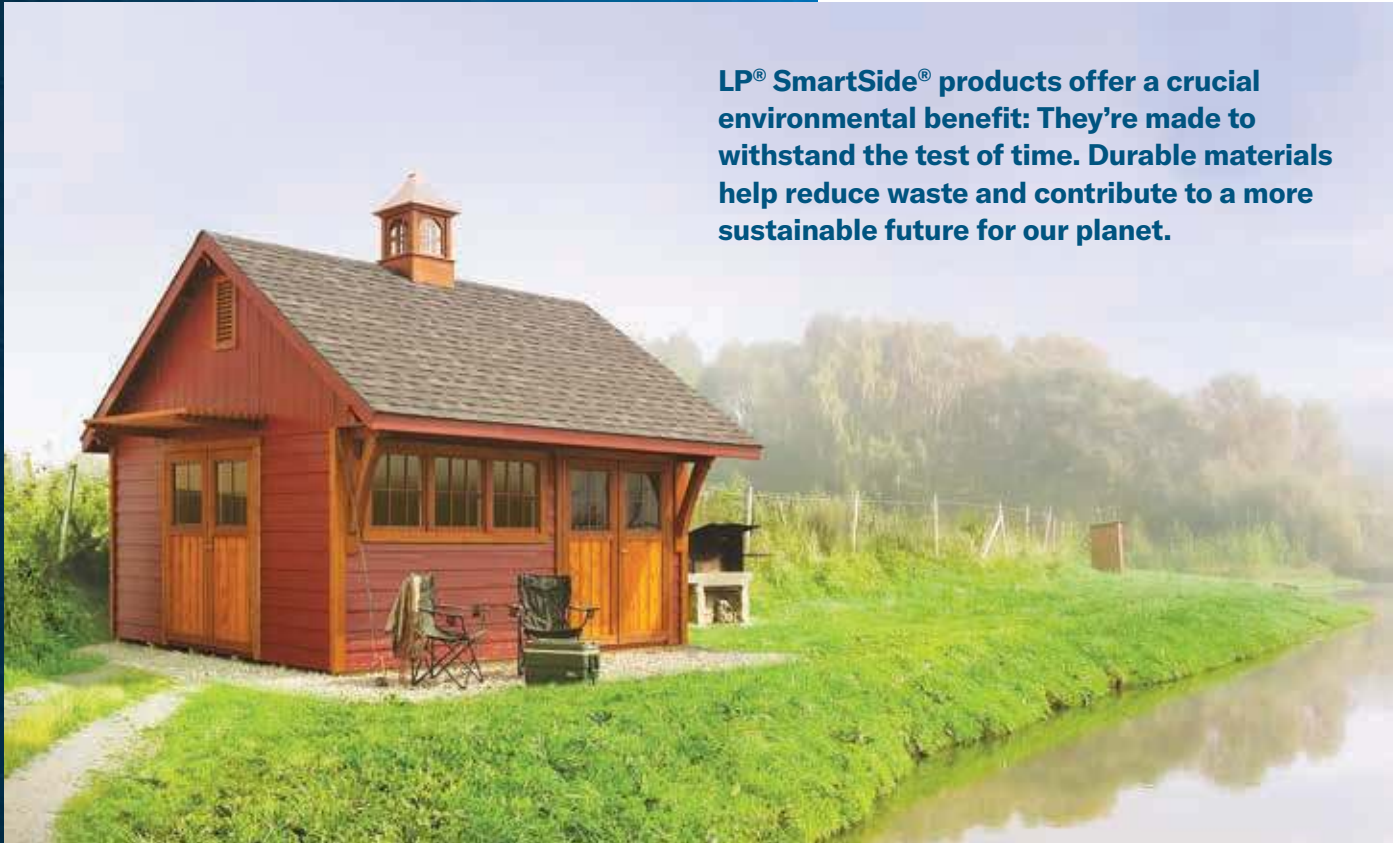

LP® SmartSide® Lap and Trim



LP® SmartSide® 8" o.c. Panel and Trim

INHERENTLY SUSTAINABLE

The LP® SmartSide® manufacturing process begins with wood, a renewable resource, vetted through strict Sustainable Forestry Initiative® (SFI®) standards.



We optimize resource efficiency by utilizing approximately 99% of the wood fiber that enters our facilities — either as a raw material in our products or as biomass, a renewable energy source, helping to reduce dependence on fossil fuels.

GREEN BUILDING CERTIFICATION

Many LP® products support architects and specification writers in earning credits for green building certifications, including the U.S. Green Building Council's LEED® (Leadership in Energy and Environmental Design) certification and the WELL Building Institute's WELL Building Standard®.

In 2024, seven LP products also achieved National Green Building Standard® certification, reinforcing their role in sustainable construction:

- LP® SmartSide® Trim & Siding
- LP® SmartSide® ExpertFinish® Trim & Siding
- LP® FlameBlock® Fire-Rated Sheathing
- LP Legacy® Premium Sub-Flooring
- LP® TechShield® Radiant Barrier Sheathing
- LP® TopNotch® 350 Durable Sub-Flooring
- LP WeatherLogic® Air & Water Barrier

CARBON NEGATIVE

LP SmartSide products lock in carbon previously stored in trees. Once installed, they continue to store carbon, resulting in less carbon in the atmosphere.

The majority of LP SmartSide products are verified carbon negative by ASTM International and have Environmental Product Declarations (EPDs) that show they store more carbon than is released during their entire life cycle.

The LP SmartSide Trim & Siding portfolio represents one of the only carbon-negative siding options on the market, making it a smart choice for building more sustainably.



AN EFFICIENT SOLUTION

LP SmartSide products offer durability and installation advantages, helping shed builders manage time and potentially reduce jobsite waste.

Learn more about the sustainability of LP SmartSide products



OPTIONS

Whatever your project or style, the LP® SmartSide® Trim & Siding portfolio offers the versatility you need to achieve stunning results.

- Offerings include panel, lap, trim, vertical siding, soffit, shake, and accessory products that work together beautifully
- Many products are available in two options — cedar texture and brushed smooth
- 8" o.c. cedar texture panels are available with SmartFinish® or SilverTech® overlays and are specifically engineered for sheds and outdoor buildings

THE LP® SMARTSIDE® PORTFOLIO



TWO TEXTURES. ENDLESS POSSIBILITIES.




Cedar Texture

Our cedar texture offers an authentic wood-grain aesthetic with timeless appeal.



LP® SmartSide® 8" o.c. Panel and Trim

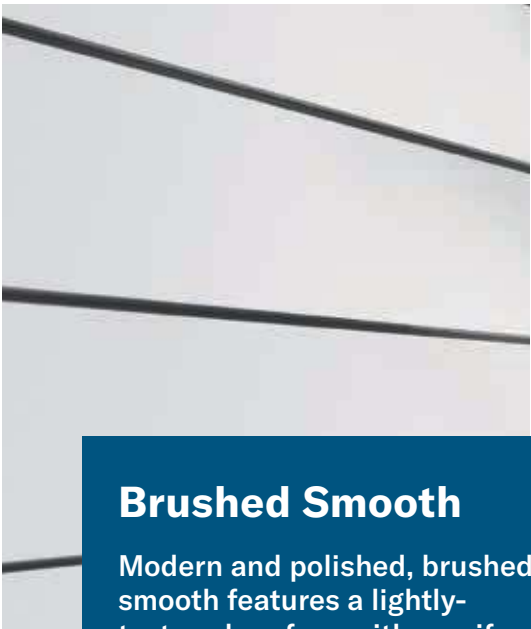

Brushed Smooth

Modern and polished, brushed smooth features a lightly-textured surface with a uniform appearance and consistent sheen.



LP® SmartSide® No Groove Panel and Trim (Board & Batten Style)

PANEL SIDING

LP® SmartSide® Panel Siding

DURABLE PANEL SIDING WITH ELEVATED APPEAL

- Provides a premium look and is highly versatile
- Rated for structural use by APA
- Strong enough to be nailed directly to stud, making additional sheathing unnecessary in many applications
- Helps to eliminate need for additional bracing on load-bearing walls
- Available in a range of options including:
 - 4" o.c. and 8" o.c. Panels (cedar texture only)
 - No Groove Shiplap Edge (NGSL) Panels
 - No Groove Square Edge (NGSE) Dual Use Siding and Soffit Panels




4" o.c. and 8" o.c. Panels feature a cedar- textured face and treated engineered wood strand technology on the back.

Shed-Specific Options: 8" o.c. panels are available with SmartFinish® or SilverTech® overlay for enhanced interiors; see p. 24 for details.



No Groove Panels are available in cedar texture or brushed smooth.

Options vary by product; see Specifications section for details.

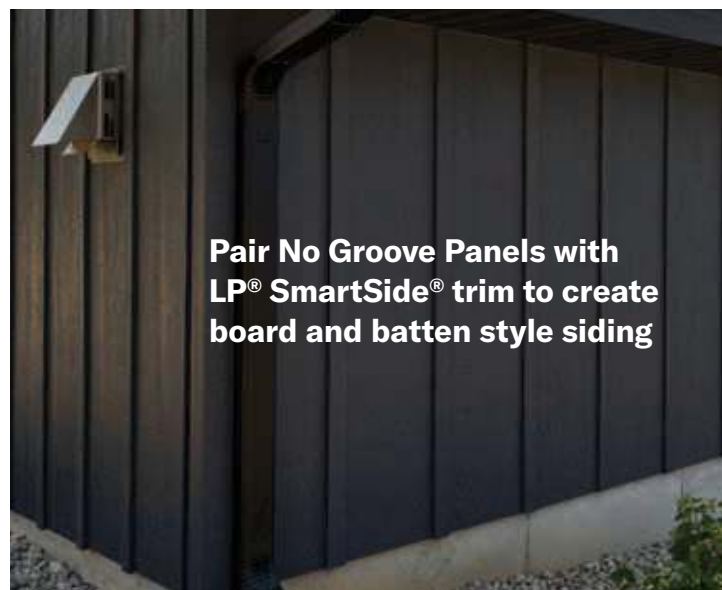

LP® SmartSide® No Groove Panel and Trim (Board & Batten Style)



LP® SmartSide® 8" o.c. Panel and Trim

A desirable upgrade from plywood

- Made using LP SmartGuard® technology for protection against fungal decay and termites, moisture intrusion, and impacts from hail
- Free of knots, patches, and face voids
- Resists buckling and cracking of the surface overlay
- Primed for exceptional paint adhesion and can be repainted over time
- Backed by an outstanding limited warranty



LP® SmartSide® 8" o.c. Panel and Trim




LP® SmartSide® Panel Siding with SmartFinish® Overlay

PREMIUM LOOKS, INSIDE AND OUT

- Specifically engineered for sheds and outdoor buildings
- Features an integrated SmartFinish® overlay that provides a clean, refined interior appearance
- Installs as quickly as traditional panel siding
- Ideal for workshops, playhouses, studios, and hobby sheds



8" o.c. Cedar Texture Panel



SmartFinish® Overlay



LP® SmartSide® Panel Siding with SilverTech® Overlay

BUILT-IN TECHNOLOGY FOR COOLER, BRIGHTER SHEDS

- Specifically engineered for sheds and outdoor buildings
- Features an integrated radiant barrier overlay to help keep sheds cooler in the summer heat
- Has a highly reflective, professional-grade overlay that resists flaking and peeling
- Helps brighten shed interiors for better visibility
- Ideal for work sheds, storage buildings, and warm-climate applications



8" o.c. Cedar Texture Panel



SilverTech® Overlay



VERTICAL SIDING

LP® SmartSide® Vertical Siding

DURABLE & EFFICIENT FROM TOP TO BOTTOM

- 16' lengths can help eliminate joints for a clean look
- Available in cedar texture or brushed smooth
- Pair with LP® SmartSide® trim to create the timeless look of board and batten style siding
- Not rated for structural use*



Cedar Texture Vertical Siding




Brushed Smooth Vertical Siding



LP® SmartSide® Vertical Siding and Trim (Board & Batten Style)

*Vertical Siding must be applied over a min. 7/16 Category Wood Structural Panel. See Technical Note #028. See Specifications section for availability by product.

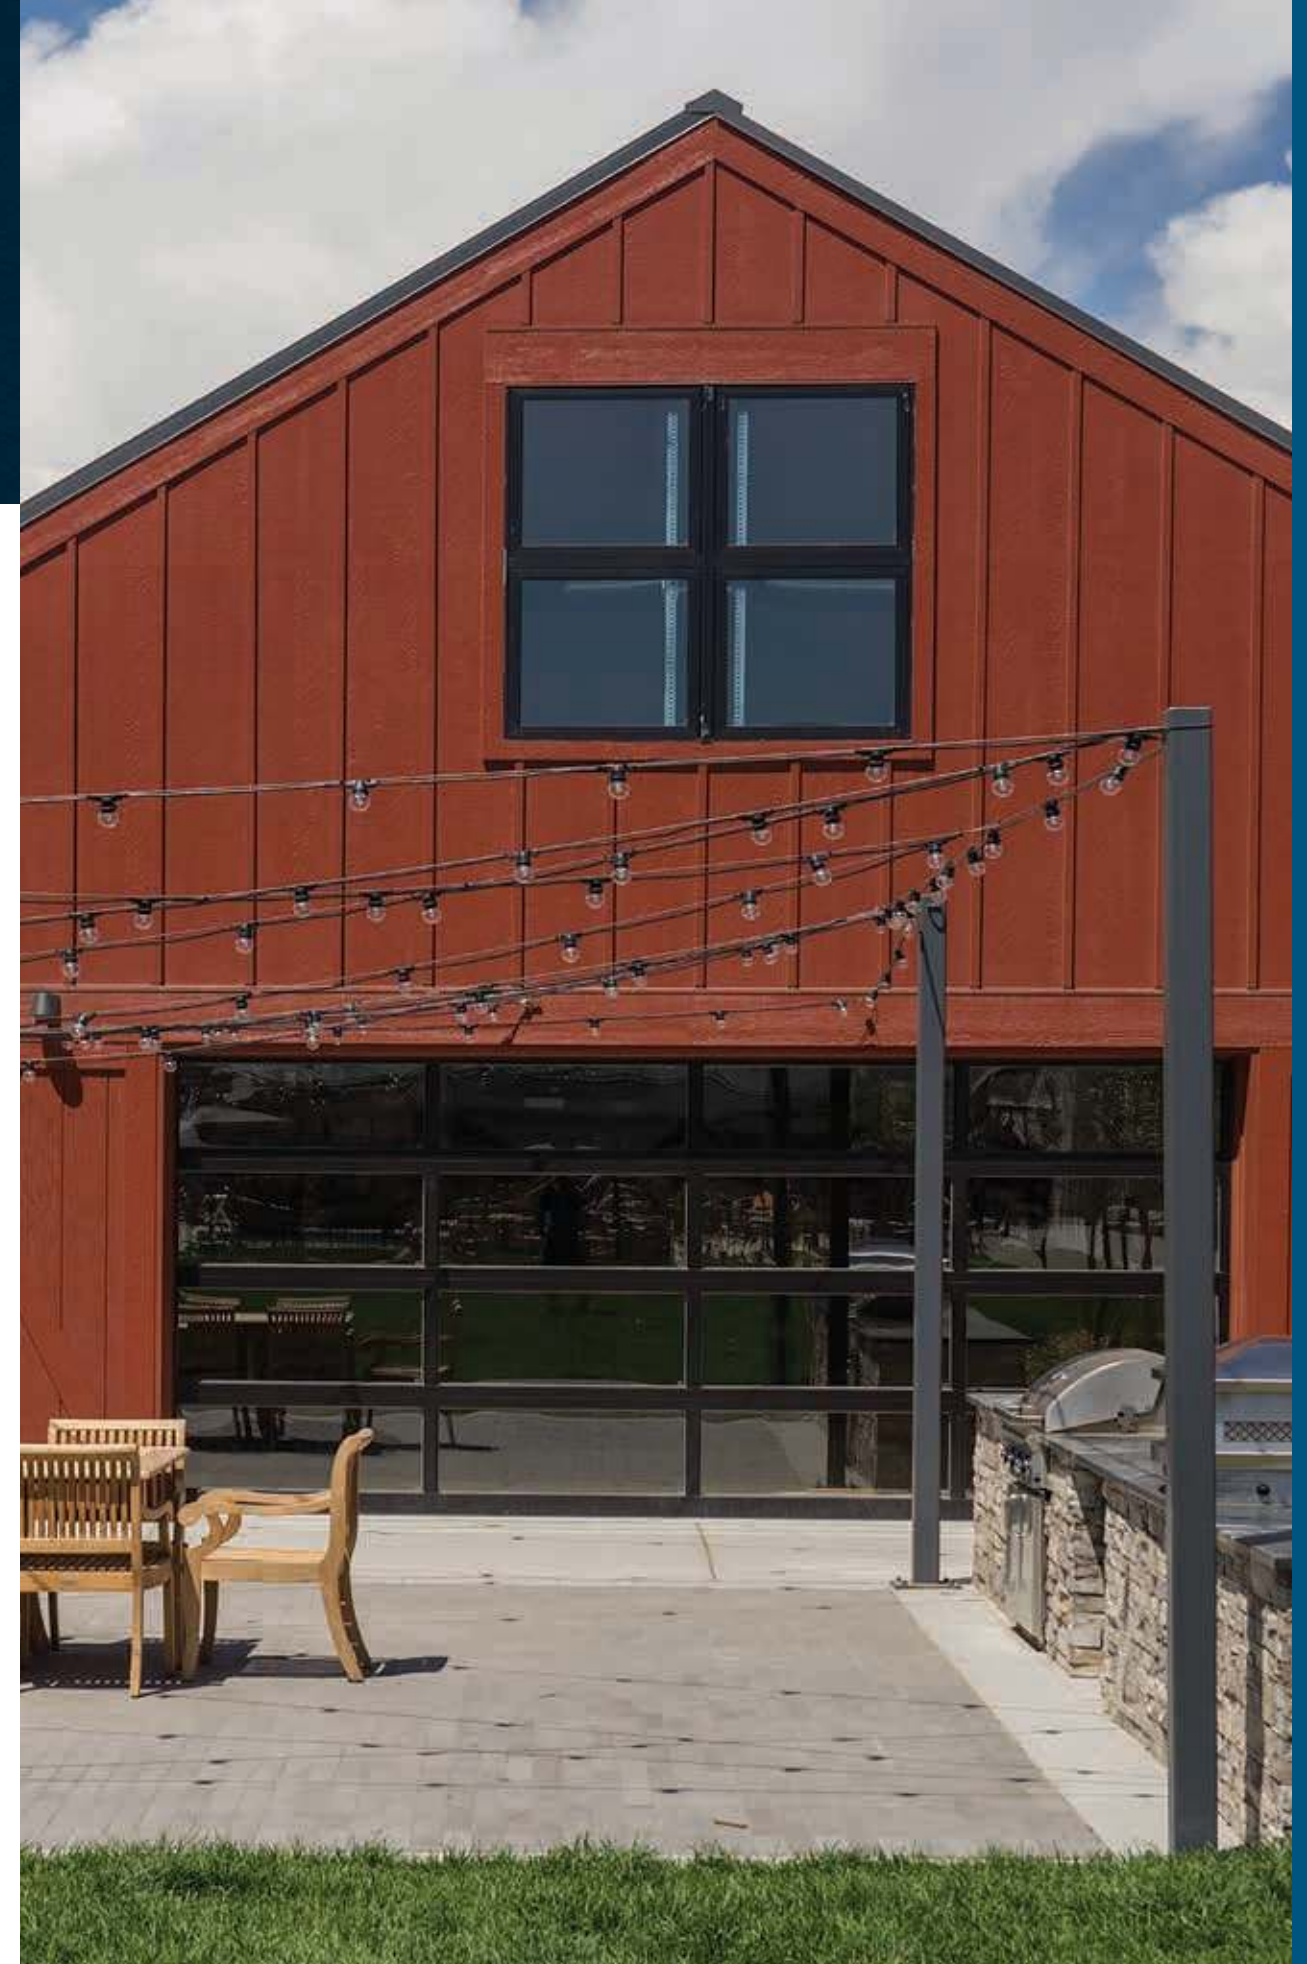

LP® SmartSide® Vertical Siding and Trim (Board & Batten Style) and Fascia

LAP SIDING

LP® SmartSide® Lap Siding

LAP THAT HOLDS UP AND STANDS OUT


- One of the most durable lap options on the market
- Available in a variety of widths and thicknesses
- All lap products are available in standard 16' length, helping minimize excess cuts to potentially reduce waste and speed up installation times
- 16' length may result in fewer seams than traditional 12' lap, providing a more polished aesthetic
- APA-certified



Cedar Texture Lap



Brushed Smooth Lap

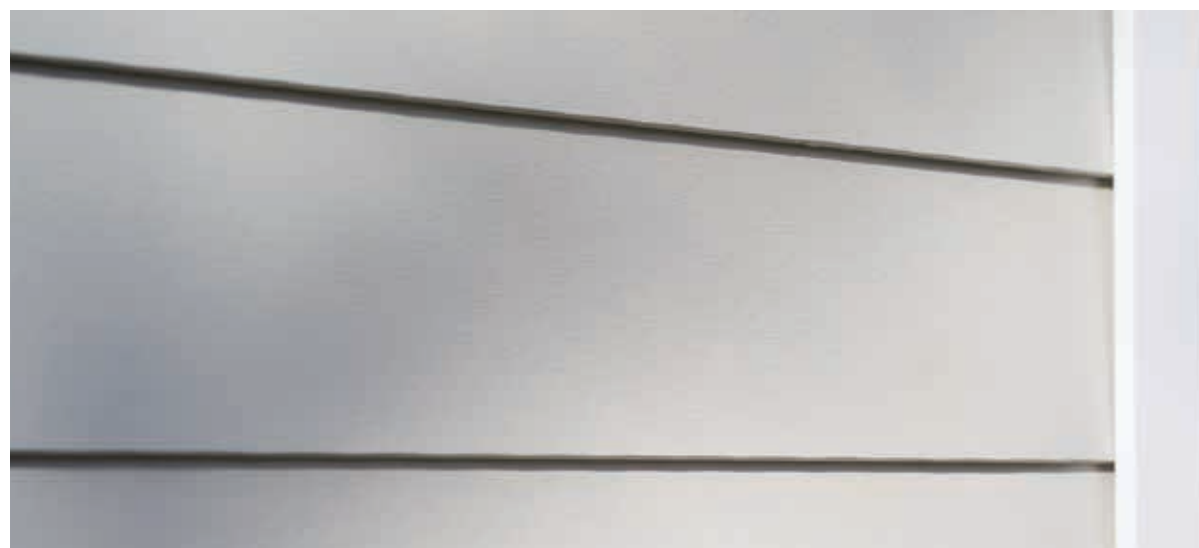

LP® SmartSide® Brushed Smooth Lap




LP® SmartSide® Cedar Texture Lap and Trim



LP® SmartSide® Cedar Texture Lap and Trim



LP® SmartSide® Cedar Texture Lap, Panel, and Trim

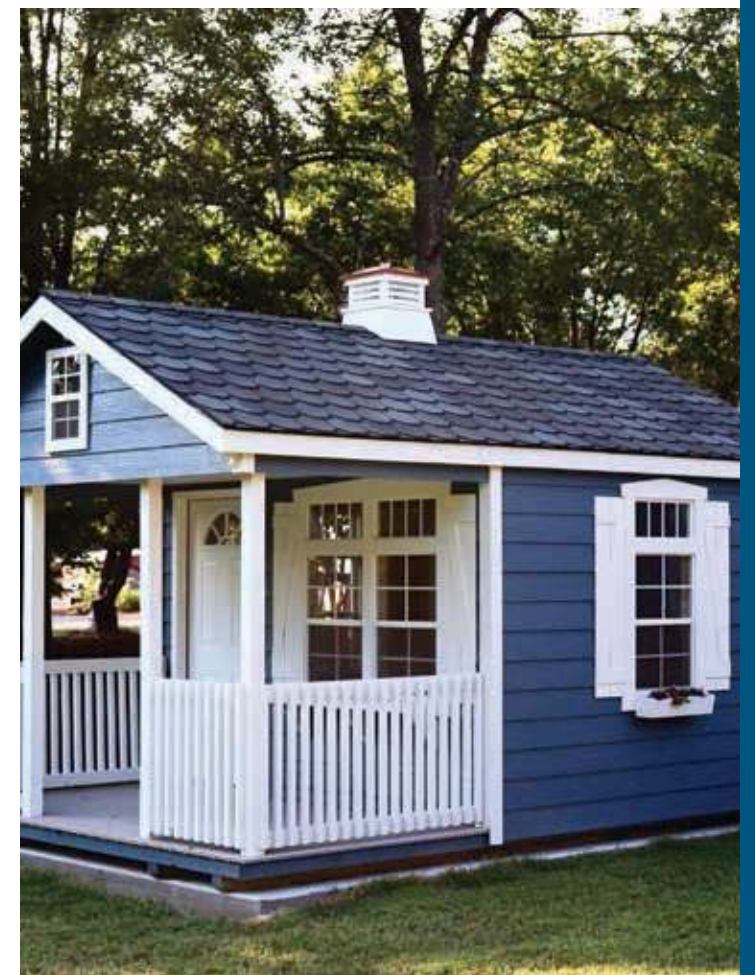

LP® SmartSide® Cedar Texture Lap and Trim

NICKEL GAP SIDING

LP® SmartSide® Nickel Gap Siding

INNOVATIVE SIDING WITH MODERN APPEAL

- Features locking flanges with a fastener groove that hides nails
- Tongue-and-groove design allows siding to be stacked and tapped into place
- Features include a nominal 1/2" thickness and 7" reveal
- Can be installed vertically or horizontally
- Install with LP® Nickel Gap Flashing or comparable alternative to support a complete system
- Ideal for wall siding or porch ceiling applications



LP® Smartside® Cedar Texture Nickel Gap Siding



**Cedar Texture
Nickel Gap Siding**



**NEW! Brushed Smooth
Nickel Gap Siding**



Profile allows for "nickel-sized" horizontal spacing between boards, accommodating a gap range of 1/16" to 1/8" after installation



LP® Smartside® Cedar Texture Nickel Gap Siding



LP® Smartside® Cedar Texture Nickel Gap Siding (ceiling)

SHAKE LAP SIDING

LP® SmartSide® Shake Lap Siding

REVERSIBLE SHAKES WITH DESIGN FLEXIBILITY

- Use as accents, in gables, or as full siding
- Features a reversible design with staggered or straight edges
- Available in cedar texture or brushed smooth

Reversible design allows for staggered or straight edge



Staggered



Straight



Cedar Texture Shake Lap



NEW! Brushed Smooth Shake Lap



LP® SmartSide® Cedar Texture Shake Lap, Trim, Fascia, and Lap



LP® SmartSide® Shake Lap Siding, Lap Siding, Trim, and Fascia



LP® SmartSide® Shake Lap Siding, Panel, Trim, and Fascia



LP® SmartSide® Cedar Texture Shake Lap, Panel, and Trim

CLOSED & VENTED SOFFIT

LP® SmartSide® Soffit

SOFFIT THAT'S BUILT FOR FORM & FUNCTION

- Provides a clean, refined aesthetic
- Coordinates beautifully with other LP® SmartSide® products
- Available in a range of options including:
 - Soffit Panels
 - No Groove Square Edge (NGSE) Dual Use Siding and Soffit Panels
 - Closed cut-to-width soffit
 - Vented cut-to-width soffit



Cedar Texture Soffit



Brushed Smooth Soffit

Texture options vary by product; see Specifications section for details.

Cut-to-width sizes can help save time by eliminating the need to cut full sheets.



LP® SmartSide® Vented and Closed Soffit, Trim, Fascia, Lap, and Panel



LP® SmartSide® Vented Soffit, Cedar Texture Shake Lap Siding, and Fascia

Closed Soffit

- Available in cut-to-width sizes (cedar texture and brushed smooth options)
- Options include 4' x 8' panels in various thicknesses (cedar texture only) and No Groove Square Edge (NGSE) Dual Use Siding and Soffit Panels in 4' x 8' and 4' x 10' (options vary by length and texture)



Vented Soffit

- Precisely cut vents offer 10 square inches of ventilation per linear foot
- Promotes continuous airflow
- Features 1/8" vents to keep hornets and most bees out
- Available in cut-to-width sizes (cedar texture and brushed smooth options)



LP® SmartSide® Vented Soffit and Lap

TRIM & FASCIA

LP® SmartSide® Trim & Fascia

SO MANY OPTIONS, SO MUCH STYLE

- Use for corners, windows, or door trims
- Available in cedar and brushed smooth textures and a variety of widths and thicknesses for extensive design flexibility
- Can be used to add contrast, highlight architectural elements, or create custom accents
- Coordinates beautifully with other LP® SmartSide® products for a cohesive, polished aesthetic
- 16' length can result in faster installation and fewer seams



Cedar Texture Trim



Brushed Smooth Trim



LP® SmartSide® Panel and Trim (Board & Batten Style)




LP® SmartSide® Trim and 8" o.c. Panel



LP® SmartSide® Trim and 8" o.c. Panel

From bold statements to subtle accents, our trim and fascia can help bring your design vision to life.

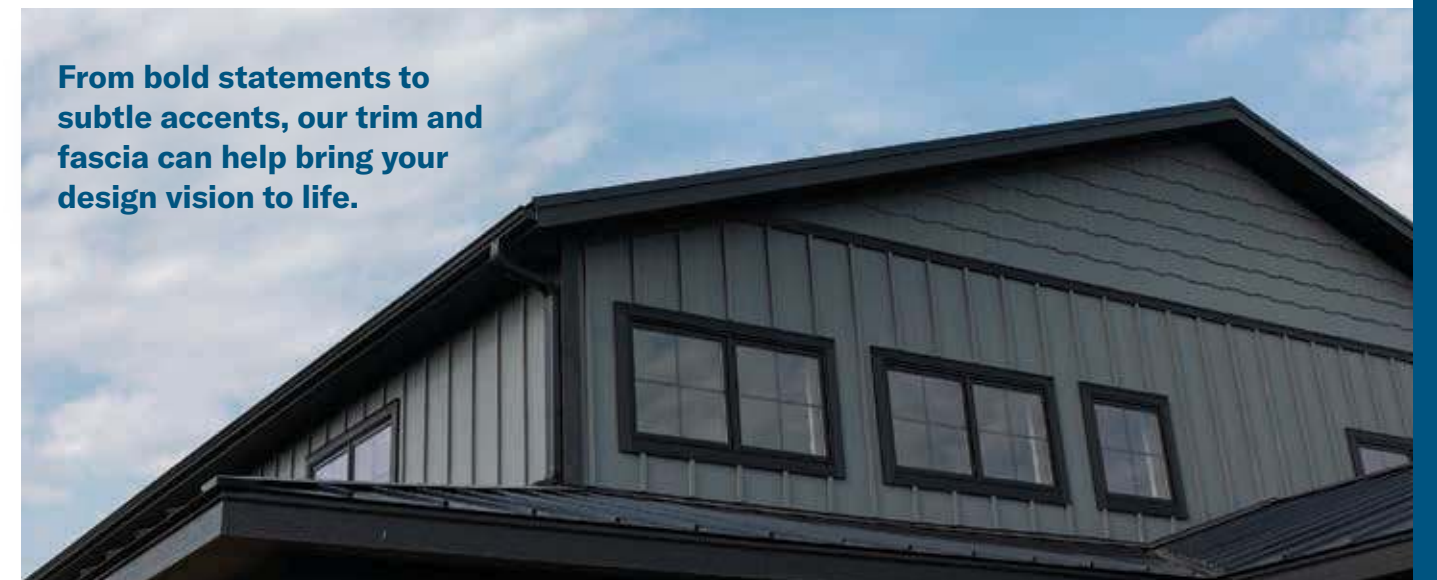

LP® SmartSide® Trim & Fascia, Shake Lap Siding, and Panel and Trim (Board & Batten Style)

ACCESSORIES

LP® SmartSide® J-Blocks & Mini-Splits

TOUCHES THAT ADD STYLE AND EFFICIENCY

- Provide an attractive solution for mounting light fixtures, faucets, and other outdoor fixtures with ease
- Mini-Splits can be separated for specific mount sizes
- Coordinates beautifully with other LP® SmartSide® products for a cohesive, polished aesthetic



Cedar Texture J-Block



Cedar Texture Mini-Split



LP® SmartSide® J-Block, Shake Lap Siding, and Trim



LP® SmartSide® J-Block, Lap, and Trim



LP® SmartSide® J-Block and Lap



LP® SmartSide® Mini-Split

FLOORING

BUILT FOR DURABILITY, DESIGNED TO LOOK GOOD

Made for real-world shed use, LP® ProStruct® Flooring products combine structural performance you can count on with a clean, finished appearance. Choose from LP® ProStruct® Everyday Series™ options for a dependable shed floor with design versatility, or upgrade to our premium product, LP® ProStruct® Flooring with SmartFinish® overlay, for enhanced durability and a refined surface.



An LP® Premium Series product

**Discover the right LP® ProStruct®
flooring product for your next build**



EVERYDAY FLOORING

NEW PRODUCTS

LP® ProStruct® Everyday Series™ Flooring

DEPENDABLE FLOORING WITH STYLE UNDERFOOT

- Designed specifically for sheds and outdoor buildings
- Features engineered wood strand technology for everyday durability and performance
- Overlay helps enhance protection and provides a clean, polished look
- Choose from three overlay options: Dark Brown, Two-Tone, or Gray
- Available in 19/32 4' x 8' panels
- Features a tongue-and-groove profile for easy installation
- Backed by a 1/5-Year Prorated Limited Warranty:
 - 1-year labor and materials
 - 5-year substrate



An easy upgrade from commodity OSB or plywood

- Installs like traditional floor sheathing
- Free of knots, patches, and face voids



Refer to limited warranty at LPCorp.com/literature for complete details, including important limitations and exclusions.



Choose from three versatile options

LP® ProStruct®
Dark Brown Flooring

LP® ProStruct®
Two-Tone Flooring

LP® ProStruct®
Gray Flooring



LP® Everyday Series™ flooring and roofing products offer dependable performance and a value-added step up from commodity OSB or plywood.

PREMIUM FLOORING

LP® ProStruct® Flooring with SmartFinish® Overlay

PROFESSIONAL-GRADE, TOUGH FLOORING

- Designed specifically for sheds and outdoor buildings
- Made using LP SmartGuard® technology for premium durability and performance
- SmartFinish® overlay helps enhance protection and provides a clean, premium aesthetic
- Available in 19/32 and 23/32 4' x 8' panels
 - 19/32 - Options include tongue-and-groove or square edge profiles
 - 23/32 - T&G only
- Backed by a 1/10-Year Prorated Limited Warranty:
 - 1-year labor and materials
 - 10-year substrate



LP® ProStruct® Flooring with SmartFinish® Overlay



Refer to limited warranty at LPCorp.com/literature for complete details, including important limitations and exclusions.



Engineered for elevated build quality, LP® Premium Series flooring and roofing products deliver enhanced durability and refined aesthetics.

ROOFING

BUILT-IN TECHNOLOGY FOR COOLER, BRIGHTER SHEDS

LP® SilverTech® panels combine structural strength with an integrated radiant barrier to help keep sheds cooler and improve interior visibility. Choose from LP® SilverTech® Everyday Series™ Roof Sheathing for dependable performance or LP® SilverTech® Premium Roof Sheathing for enhanced durability and a professional-grade surface.



Discover the right LP® SilverTech® roofing product for your next build



EVERYDAY ROOFING

NEW PRODUCT


LP® SilverTech® Everyday Series™ Roof Sheathing

DEPENDABLE PERFORMANCE, BUILT-IN VALUE

- Designed specifically for sheds and outdoor buildings
- Features engineered wood strand technology for everyday durability and performance
- Integrated radiant barrier helps keep sheds cooler in the summer heat
- SilverTech® overlay helps brighten interiors for better visibility and provides a clean look
- Ideal for work sheds, storage buildings, and warm-climate applications
- Available in 7/16 4' x 8' panels
- Backed by a 10-Year Prorated Limited Warranty



LP® SilverTech®
Everyday Series™ Roof Sheathing



Refer to limited warranty at LPCorp.com/literature for complete details, including important limitations and exclusions.



An easy upgrade from commodity OSB or plywood

- Installs like traditional roof sheathing
- Free of knots, patches, and face voids
- SilverTech® overlay resists flaking and peeling



LP® Everyday Series™ flooring and roofing products offer dependable performance and a value-added step up from commodity OSB or plywood.

PREMIUM ROOFING


LP® SilverTech® Premium Roof Sheathing

ELEVATED LOOKS & PERFORMANCE

- Designed specifically for sheds and outdoor buildings
- Features engineered wood strand technology for enhanced durability and premium performance
- Panels are sanded and a fines layer is added beneath the overlay for a refined appearance
- Integrated radiant barrier helps keep sheds cooler in the summer heat
- Highly reflective, professional-grade overlay helps brighten interiors for better visibility
- Ideal for work sheds, storage buildings, and warm-climate applications
- Available in 7/16 4' x 8' panels
- Installs like conventional roof sheathing
- Backed by a 20-Year Prorated Limited Warranty



LP® SilverTech®
Premium Roof Sheathing



Refer to limited warranty at LPCorp.com/literature for complete details, including important limitations and exclusions.



Engineered for elevated build quality, LP® Premium Series flooring and roofing products deliver enhanced durability and refined aesthetics.

SPECIFICATIONS

ALL THE DETAILS.

The LP® Outdoor Building Solutions® portfolio features a comprehensive system of siding, flooring, and roofing solutions in a variety of sizes, textures, and styles. Find product specifications here, and discover the right mix for your next build.



LPShed.com



PANEL SIDING

Products:

- LP® SmartSide® 38 Series 8" o.c. Panel
- LP® SmartSide® 76 Series 4" o.c. Panel
- LP® SmartSide® 76 Series 8" o.c. Panel
- LP® SmartSide® 190 Series 8" o.c. Panel

DESIGNED & RATED FOR EXTERIOR USE

May be attached direct to studs; see application instructions for fastening and installation requirements

Designed for vertical installation only

Rated for structural use by APA

Substrate:

- Features engineered wood strand technology with precisely-sized, shaped, and layered wood strands from responsibly sourced logs
- Made using LP’s proprietary SmartGuard® process, which includes industrial-grade resins, water-resistant waxes, zinc borate, and a resin-saturated overlay



Sustainability Info:

- ASTM-Verified Carbon Negative
- Made with wood, a renewable resource, vetted through strict Sustainable Forestry Initiative® (SFI®) standards



Application Instructions:

LP

LPCorp.com/Literature



4" o.c. and 8" o.c. Panels



4" o.c. Panel



8" o.c. Panel

4" o.c. and 8" o.c. panels are available in cedar texture

Interior Finish:



Strand Substrate

4" o.c. and 8" o.c. Panels

Various sizes and thicknesses


Specifications and PIDs:

PRODUCT	TEXTURE	GROOVE WIDTH
All products	Cedar	3/8 in. (10 mm)


PRODUCT	GROOVE	LENGTH	ACTUAL WIDTH	THICKNESS	MAX SPAN RATING	WEIGHT	PCS/ UNIT	PID
38 Series 8" o.c. Panel 3/8" nominal thickness	8 in. o.c.	6 ft. (72 in.) (1.8 m)	48.56 in. (1234 mm)	0.354 in. (9 mm)	16 in. o.c.	1.5 PSF	90	27805
	8 in. o.c.	7 ft. (84 in.) (2.1 m)	48.56 in. (1234 mm)	0.354 in. (9 mm)	16 in. o.c.	1.5 PSF	90	27806
	8 in. o.c.	8 ft. (96 in.) (2.4 m)	48.56 in. (1234 mm)	0.354 in. (9 mm)	16 in. o.c.	1.5 PSF	90	25840
	8 in. o.c.	9 ft. (108 in.) (2.7 m)	48.56 in. (1234 mm)	0.354 in. (9 mm)	16 in. o.c.	1.5 PSF	90	25843
	8 in. o.c.	10 ft. (120 in.) (3.0 m)	48.56 in. (1234 mm)	0.354 in. (9 mm)	16 in. o.c.	1.5 PSF	90	25844
	8 in. o.c.	12 ft. (144 in.) (3.7 m)	48.56 in. (1234 mm)	0.354 in. (9 mm)	16 in. o.c.	1.5 PSF	90	25845
76 Series 4" o.c. Panel 7/16" nominal thickness	4 in. o.c.	8 ft. (96 in.) (2.4 m)	48.56 in. (1234 mm)	0.418 in. (10.6 mm)	16 in. o.c.	1.5 PSF	80	25831*
76 Series 8" o.c. Panel 7/16" nominal thickness	8 in. o.c.	8 ft. (96 in.) (2.4 m)	48.56 in. (1234 mm)	0.418 in. (10.6 mm)	16 in. o.c.	1.5 PSF	80	25848
	8 in. o.c.	9 ft. (108 in.) (2.7 m)	48.56 in. (1234 mm)	0.418 in. (10.6 mm)	16 in. o.c.	1.5 PSF	80	25850
	8 in. o.c.	10 ft. (120 in.) (3.0 m)	48.56 in. (1234 mm)	0.418 in. (10.6 mm)	16 in. o.c.	1.5 PSF	80	25851
190 Series 8" o.c. Panel 19/32" nominal thickness	8 in. o.c.	8 ft. (96 in.) (2.4 m)	48.56 in. (1234 mm)	0.578 in. (14.7 mm)	24 in. o.c.	2 PSF	60	25852

*Special order item; Requires minimum quantity and extended lead times.


38 SERIES CEDAR TEXTURE PANEL 8" O.C.




GROOVE DETAIL



76 SERIES CEDAR TEXTURE PANEL 4" O.C. & 8" O.C.



190 SERIES CEDAR TEXTURE PANEL 8" O.C.



PANEL SIDING

Product:
LP® SmartSide® 76 Series 8" o.c. Panel with SmartFinish® Overlay
Specifically engineered for shed and outdoor buildings

DESIGNED & RATED FOR EXTERIOR USE
May be attached direct to studs; see application instructions for fastening and installation requirements
Designed for vertical installation only
Rated for structural use by APA

- Substrate:**
- Features engineered wood strand technology with precisely-sized, shaped, and layered wood strands from responsibly sourced logs
 - Made using LP's proprietary SmartGuard® process, which includes industrial-grade resins, water-resistant waxes, zinc borate, and a resin-saturated overlay




Sustainability Info:
Made with wood, a renewable resource, vetted through strict Sustainable Forestry Initiative® (SFI®) standards

Specifications and PIDs:


PRODUCT	GROOVE	GROOVE WIDTH
All products	8 in. o.c.	3/8 in. (10 mm)

PRODUCT	TEXTURE	LENGTH	ACTUAL WIDTH	THICKNESS	MAX SPAN RATING	WEIGHT	PCS/UNIT	PID
76 Series 8" o.c. with SmartFinish® overlay 7/16" nominal thickness	Cedar	7 ft. (84 in.) (2.1 m)	48.56 in. (1234 mm)	0.418 in. (10.6 mm)	16 in. o.c.	1.5 PSF	80	30962
	Cedar	8 ft. (96 in.) (2.4 m)	48.56 in. (1234 mm)	0.418 in. (10.6 mm)	16 in. o.c.	1.5 PSF	80	30898
	Cedar	9 ft. (108 in.) (2.7 m)	48.56 in. (1234 mm)	0.418 in. (10.6 mm)	16 in. o.c.	1.5 PSF	80	48430

76 SERIES CEDAR TEXTURE PANEL 8" O.C.



GROOVE DETAIL



Shed Panels with SmartFinish® overlay

7/16" Nominal Thickness
7' | 8' | 9'



Cedar Texture

Interior Finish:



SmartFinish® overlay

Application Instructions:

LPCorp.com/Literature

PANEL SIDING

Products:
LP® SmartSide® 38 Series 8" o.c. Panel with SilverTech® Overlay
LP® SmartSide® 76 Series 8" o.c. Panel with SilverTech® Overlay
Specifically engineered for shed and outdoor buildings

DESIGNED & RATED FOR EXTERIOR USE
May be attached direct to studs; see application instructions for fastening and installation requirements
Designed for vertical installation only
Rated for structural use by APA

- Substrate:**
- Features engineered wood strand technology with precisely-sized, shaped, and layered wood strands from responsibly sourced logs
 - Made using LP's proprietary SmartGuard® process, which includes industrial-grade resins, water-resistant waxes, zinc borate, and a resin-saturated overlay




Sustainability Info:
Made with wood, a renewable resource, vetted through strict Sustainable Forestry Initiative® (SFI®) standards

Specifications and PIDs:

PRODUCT	GROOVE	GROOVE WIDTH
All products	8 in. o.c.	3/8 in. (10 mm)

GROOVE DETAIL



Shed Panels with SilverTech® overlay

Various sizes and thicknesses



Cedar Texture

Interior Finish:




SilverTech® overlay

Application Instructions:


LPCorp.com/Literature

PRODUCT	TEXTURE	LENGTH	ACTUAL WIDTH	THICKNESS	MAX SPAN RATING	WEIGHT	PCS/UNIT	PID
38 Series 8" o.c. with SilverTech® overlay 3/8" nominal thickness	Cedar	7 ft. (84 in.) (2.1 mm)	48.56 in. (1234 mm)	0.354 in. (9 mm)	16 in. o.c.	1.5 PSF	90	29805
	Cedar	8 ft. (96 in.) (2.4 m)	48.56 in. (1234 mm)	0.354 in. (9 mm)	16 in. o.c.	1.5 PSF	90	29633
76 Series 8" o.c. with SilverTech® overlay 7/16" nominal thickness	Cedar	8 ft. (96 in.) (2.4 m)	48.56 in. (1234 mm)	0.418 in. (10.6 mm)	16 in. o.c.	1.5 PSF	80	29524

38 SERIES CEDAR TEXTURE PANEL 8" O.C.



76 SERIES CEDAR TEXTURE PANEL 8" O.C.



All graphics are for illustrative purposes only.
See LPCorp.com for product, warranty, and installation information. Metric units are rounded. PSF = Pounds Per Square Foot
Refer to limited warranty at LPCorp.com/literature for complete details, including important limitations and exclusions.

PANEL SIDING

Products:

- LP® SmartSide® 38 Series No Groove Shiplap Edge (NGSL) Panel
- LP® SmartSide® 38 Series No Groove Square Edge (NGSE) Dual Use Siding and Soffit Panel
- LP® SmartSide® 76 Series No Groove Shiplap Edge Panel

DESIGNED & RATED FOR EXTERIOR USE

May be attached direct to studs; see application instructions for fastening and installation requirements

Can be installed vertically or horizontally

Rated for structural use by APA

Substrate:

- Features engineered wood strand technology with precisely-sized, shaped, and layered wood strands from responsibly sourced logs
- Made using LP’s proprietary SmartGuard® process, which includes industrial-grade resins, water-resistant waxes, zinc borate, and a resin-saturated overlay



Sustainability Info:

- ASTM-Verified Carbon Negative
- Made with wood, a renewable resource, vetted through strict Sustainable Forestry Initiative® (SFI®) standards




Application Instructions:

LPQR

LPCorp.com/Literature



No Groove Panels

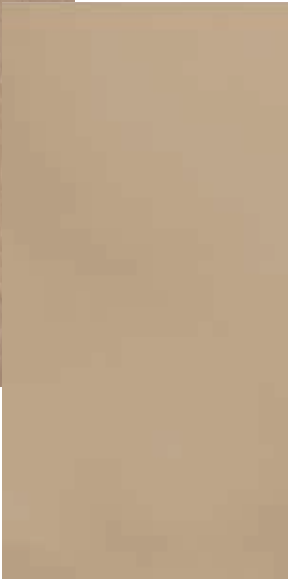

Cedar Texture

Brushed Smooth
Available in NGSE Dual Use Panels only

Pair our No Groove Panels with LP® SmartSide® trim for board & batten style applications

Interior Finish:



Strand Substrate

No Groove Panels


Various sizes and thicknesses

Specifications and PIDs:

PRODUCT	TEXTURE	LENGTH	ACTUAL WIDTH	THICKNESS	MAX SPAN RATING	WEIGHT	PCS/UNIT	PID
38 Series No Groove Shiplap Edge (NGSL) Panel 3/8" nominal thickness	Cedar	8 ft. (96 in.) (2.4 m)	48.56 in. (1234 mm)	0.354 in. (9 mm)	16 in. o.c.	1.5 PSF	90	25855*
	Cedar	9 ft. (108 in.) (2.7 m)	48.56 in. (1234 mm)	0.354 in. (9 mm)	16 in. o.c.	1.5 PSF	90	29189*
	Cedar	10 ft. (120 in.) (3.0 m)	48.56 in. (1234 mm)	0.354 in. (9 mm)	16 in. o.c.	1.5 PSF	90	25825*
38 Series No Groove Square Edge (NGSE) Dual Use Siding and Soffit Panel ★ 3/8" nominal thickness	Cedar	8 ft. (96 in.) (2.4 m)	47.81 in. (1214 mm)	0.354 in. (9 mm)	16 in. o.c. Siding 24 in. o.c. Soffit	1.5 PSF	90	41044
38 Series No Groove Square Edge (NGSE) Dual Use Siding and Soffit Panel ★ 3/8" nominal thickness	Brushed Smooth	8 ft. (96 in.) (2.4 m)	47.81 in. (1214 mm)	0.354 in. (9 mm)	16 in. o.c. Siding 24 in. o.c. Soffit	1.5 PSF	90	46008*
	Brushed Smooth	10 ft. (120 in.) (3.0 m)	47.81 in. (1214 mm)	0.354 in. (9 mm)	16 in. o.c. Siding 24 in. o.c. Soffit	1.5 PSF	90	46650*
76 Series No Groove Shiplap Edge (NGSL) Panel 7/16" nominal thickness	Cedar	8 ft. (96 in.) (2.4 m)	48.56 in. (1234 mm)	0.418 in. (10.6 mm)	16 in. o.c..	1.5 PSF	90	25856
	Cedar	9 ft. (108 in.) (2.7 m)	48.56 in. (1234 mm)	0.418 in. (10.6 mm)	16 in. o.c.	1.5 PSF	90	25857
	Cedar	10 ft. (120 in.) (3.0 m)	48.56 in. (1234 mm)	0.418 in. (10.6 mm)	16 in. o.c.	1.5 PSF	90	25858

★ Can be used in siding or soffit applications

*Special order item; Requires minimum quantity and extended lead times.

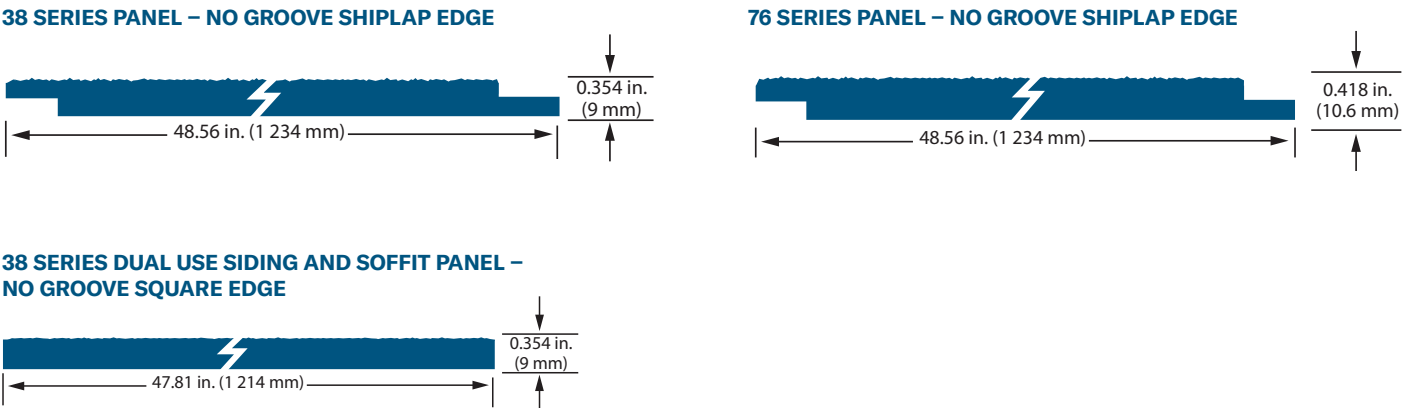

VERTICAL SIDING

Product:

LP® SmartSide® 38 Series Vertical Siding

DESIGNED & RATED FOR EXTERIOR USE

Not rated for structural use. Sheathing-only attachment; see installation instructions for details*

Substrate:

- Features engineered wood strand technology with precisely-sized, shaped, and layered wood strands from responsibly sourced logs
- Made using LP's proprietary SmartGuard® process, which includes industrial-grade resins, water-resistant waxes, zinc borate, and a resin-saturated overlay



Sustainability Info:


- ASTM-Verified Carbon Negative
- Made with wood, a renewable resource, vetted through strict Sustainable Forestry Initiative® (SFI®) standards



Specifications and PIDs:

PRODUCT	TEXTURE	LENGTH	ACTUAL WIDTH	THICKNESS	WEIGHT	PCS/UNIT	PID
38 Series Vertical Siding	Cedar	16 ft. (192 in.) (4.9 m)	15.94 in. (405 mm)	0.354 in. (9 mm)	1.5 PSF	135	40503
	Brushed Smooth	16 ft. (192 in.) (4.9 m)	15.94 in. (405 mm)	0.354 in. (9 mm)	1.5 PSF	135	46007

38 SERIES VERTICAL SIDING



Vertical Siding

3/8" Nominal Thickness
16' x 16"



Cedar Texture



Brushed Smooth

Pair with LP® SmartSide® trim for board & batten style applications

Application Instructions:

LPCorp.com/Literature



LAP SIDING

Product:

LP® SmartSide® 38 Series Lap Siding

DESIGNED & RATED FOR EXTERIOR USE

May be attached direct to studs; see application instructions for fastening and installation requirements

APA-Certified Lap Siding

Substrate:

- Features engineered wood strand technology with precisely-sized, shaped, and layered wood strands from responsibly sourced logs
- Made using LP's proprietary SmartGuard® process, which includes industrial-grade resins, water-resistant waxes, zinc borate, and a resin-saturated overlay



Sustainability Info:

- ASTM-Verified Carbon Negative
- Made with wood, a renewable resource, vetted through strict Sustainable Forestry Initiative® (SFI®) standards



Lap Siding

3/8" Nominal Thickness
6" | 8" | 12"



Cedar Texture



Brushed Smooth


Application Instructions:

LPCorp.com/Literature



Specifications and PIDs:

38 SERIES LAP SIDING



PRODUCT	TEXTURE	LENGTH	ACTUAL WIDTH	THICKNESS	MAX SPAN RATING	WEIGHT	PCS/UNIT	PID
38 Series Lap Siding	Cedar	16 ft. (192 in.) (4.9 m)	5.84 in. (148 mm)	0.354 in. (9 mm)	16 in. o.c.	1.5 PSF	360	25796
		16 ft. (192 in.) (4.9 m)	7.84 in. (199 mm)	0.354 in. (9 mm)	16 in. o.c.	1.5 PSF	270	25797
		16 ft. (192 in.) (4.9 m)	11.84 in. (301 mm)	0.354 in. (9 mm)	16 in. o.c.	1.5 PSF	180	25799
	Brushed Smooth	16 ft. (192 in.) (4.9 m)	5.84 in. (148 mm)	0.354 in. (9 mm)	16 in. o.c.	1.5 PSF	360	45989
		16 ft. (192 in.) (4.9 m)	7.84 in. (199 mm)	0.354 in. (9 mm)	16 in. o.c.	1.5 PSF	270	45990
		16 ft. (192 in.) (4.9 m)	11.84 in. (301 mm)	0.354 in. (9 mm)	16 in. o.c.	1.5 PSF	180	45991

*Vertical Siding must be applied over a min. 7/16 Category Wood Structural Panel. See Technical Note #028.

All graphics are for illustrative purposes only.

See LPCorp.com for product, warranty, and installation information. Metric units are rounded. PSF = Pounds Per Square Foot. Refer to limited warranty at LPCorp.com/literature for complete details, including important limitations and exclusions.

All graphics are for illustrative purposes only.

See LPCorp.com for product, warranty, and installation information. Metric units are rounded. PSF = Pounds Per Square Foot. Refer to limited warranty at LPCorp.com/literature for complete details, including important limitations and exclusions.

NICKEL GAP SIDING

Product:

LP® SmartSide® Nickel Gap Siding

DESIGNED & RATED FOR EXTERIOR USE

May be attached direct to studs; see application instructions for fastening and installation requirements

Substrate:

- Features engineered wood strand technology with precisely-sized, shaped, and layered wood strands from responsibly sourced logs
- Made using LP’s proprietary SmartGuard® process, which includes industrial-grade resins, water-resistant waxes, zinc borate, and a resin-saturated overlay



Sustainability Info:

Made with wood, a renewable resource, vetted through strict Sustainable Forestry Initiative® (SFI®) standards



Additional Info:

- Can be installed vertically or horizontally
- Install with LP® Nickel Gap Flashing (100 pcs/box) or comparable alternative to support a complete system

Specifications and PIDs:

PRODUCT	TEXTURE	LENGTH	ACTUAL WIDTH	THICKNESS	MAX SPAN RATING	WEIGHT	PCS	PID
Nickel Gap Siding	Cedar	16 ft. (192 in.) (4.9 m)	7.88 in (200 mm)	0.495 in. (12.6 mm)	24 in. o.c.	1.5 PSF	180/unit	45545
	Brushed Smooth	16 ft. (192 in.) (4.9 m)	7.88 in (200 mm)	0.495 in. (12.6 mm)	24 in. o.c.	1.5 PSF	180/unit	46132
LP® Nickel Gap Flashing	N/A	10 in. (254 mm)	4 in. (101.6 mm)	0.024 in. (0.61 mm)	N/A	9.4 LBS	100/box	46180

Nickel Gap Siding

1/2" Nominal Thickness
8"


Profile allows for "nickel-sized" horizontal spacing between boards, accommodating a gap range of 1/16" to 1/8" after installation.



Cedar Texture



NEW! Brushed Smooth

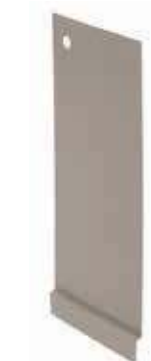

LP® Nickel Gap Flashing

Application Instructions:

LPCorp.com/Literature



SHAKE LAP SIDING

Product:

LP® SmartSide® Shake Lap Siding

DESIGNED & RATED FOR EXTERIOR USE

Substrate:

- Features engineered wood strand technology with precisely-sized, shaped, and layered wood strands from responsibly sourced logs
- Made using LP’s proprietary SmartGuard® process, which includes industrial-grade resins, water-resistant waxes, zinc borate, and a resin-saturated overlay



Sustainability Info:

- ASTM-Verified Carbon Negative
- Made with wood, a renewable resource, vetted through strict Sustainable Forestry Initiative® (SFI®) standards



Shake Lap Siding

3/8" Nominal Thickness
12" x 48"



Cedar Texture



NEW! Brushed Smooth

Reversible design allows for staggered or straight edge

Application Instructions:


LPCorp.com/Literature



Specifications and PIDs:

PRODUCT	TEXTURE	LENGTH	ACTUAL WIDTH	THICKNESS	MAX SPAN RATING	WEIGHT	PCS/UNIT	PID
38 Series Shake Lap Siding	Cedar	4ft. (48.56 in.) (1.2 m)	11.625 in. (295 mm)	0.354 in. (9 mm)	16 in. o.c.	1.5 PSF	400	42092
	Brushed Smooth	4ft. (48.56 in.) (1.2 m)	11.625 in. (295 mm)	0.354 in. (9 mm)	16 in. o.c.	1.5 PSF	400	48026

38 SERIES SHAKE LAP SIDING

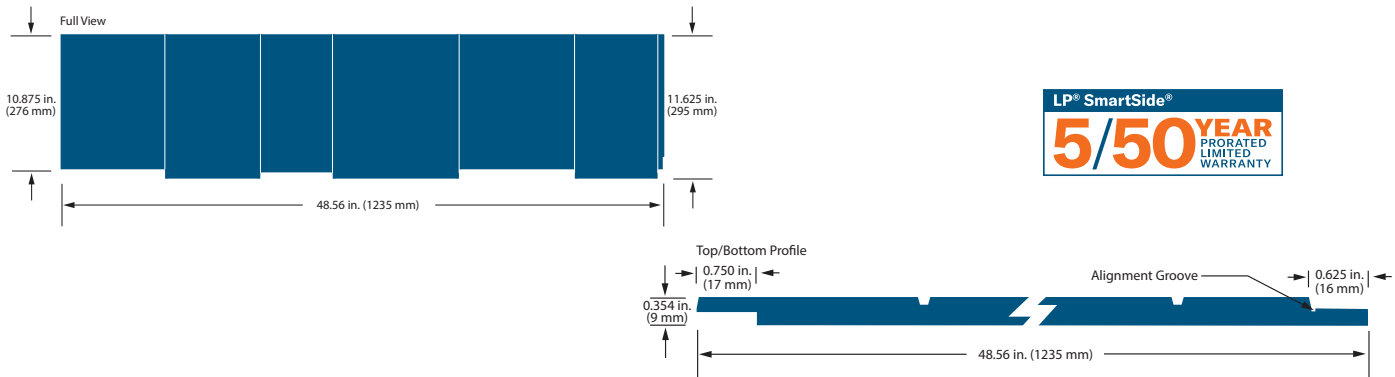

CLOSED SOFFIT

Products:

- LP® SmartSide® 38 Series 4' x 8' Soffit
- LP® SmartSide® 38 Series No Groove Square Edge (NGSE) Dual Use Siding and Soffit Panel
- LP® SmartSide® 38 Series Cut-to-Width Soffit
- LP® SmartSide® 76 Series Closed Soffit
- LP® SmartSide® 190 Series Closed Soffit

DESIGNED & RATED FOR EXTERIOR USE

Substrate:

- Features engineered wood strand technology with precisely-sized, shaped, and layered wood strands from responsibly sourced logs
- Made using LP’s proprietary SmartGuard® process, which includes industrial-grade resins, water-resistant waxes, zinc borate, and a resin-saturated overlay




Sustainability Info:

- ASTM-Verified Carbon Negative
- Made with wood, a renewable resource, vetted through strict Sustainable Forestry Initiative® (SFI®) standards



Application Instructions:

LPCorp.com/Literature

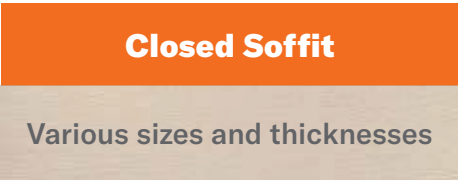


Cedar Texture



Brushed Smooth

Available in cut-to-width or panel options

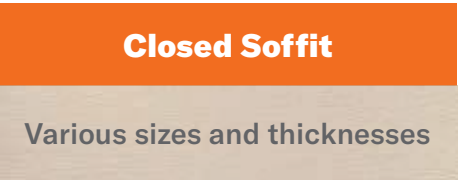


Specifications and PIDs:

PRODUCT	TEXTURE	LENGTH	ACTUAL WIDTH	THICKNESS	MAX SPAN RATING	WEIGHT	PCS/UNIT	PID
38 Series 4' x 8' Soffit 3/8" nominal thickness	Cedar	8 ft. (96 in.) (2.4 m)	47.81 in. (1 214 mm)	0.354 in. (9 mm)	24 in. o.c.	1.5 PSF	90	25813
38 Series No Groove Square Edge (NGSE) Dual Use Siding and Soffit Panel ★ 3/8" nominal thickness	Cedar	8 ft. (96 in.) (2.4 m)	47.81 in. (1214 mm)	0.354 in. (9 mm)	16 in. o.c. Siding 24 in. o.c. Soffit	1.5 PSF	90	41044
38 Series No Groove Square Edge (NGSE) Dual Use Siding and Soffit Panel ★ 3/8" nominal thickness	Brushed Smooth	8 ft. (96 in.) (2.4 m)	47.81 in. (1214 mm)	0.354 in. (9 mm)	16 in. o.c. Siding 24 in. o.c. Soffit	1.5 PSF	90	46008*
		10 ft. (120 in.) (3.0 m)	47.81 in. (1214 mm)	0.354 in. (9 mm)	16 in. o.c. Siding 24 in. o.c. Soffit	1.5 PSF	90	46650*
38 Series Closed Soffit Cut-to-Width 3/8" nominal thickness	Cedar	16 ft. (192 in.) (4.9 m)	11.94 in. (303 mm)	0.354 in. (9 mm)	24 in. o.c.	1.5 PSF	180	25805
		16 ft. (192 in.) (4.9 m)	15.94 in. (405 mm)	0.354 in. (9 mm)	24 in. o.c.	1.5 PSF	135	25806
		16 ft. (192 in.) (4.9 m)	23.94 in. (608 mm)	0.354 in. (9 mm)	24 in. o.c.	1.5 PSF	90	25807
38 Series Closed Soffit Cut-to-Width 3/8" nominal thickness	Brushed Smooth	16 ft. (192 in.) (4.9 m)	11.94 in. (303 mm)	0.354 in. (9 mm)	24 in. o.c.	1.5 PSF	180	46005
		16 ft. (192 in.) (4.9 m)	15.94 in. (405 mm)	0.354 in. (9 mm)	24 in. o.c.	1.5 PSF	135	46006
		16 ft. (192 in.) (4.9 m)	23.94 in. (608 mm)	0.354 in. (9 mm)	24 in. o.c.	1.5 PSF	90	46009
76 Series 4' x 8' Soffit 7/16" nominal thickness	Cedar	8 ft. (96 in.) (2.4 m)	47.81 in. (1214 mm)	0.418 in. (10.6 mm)	24 in. o.c.	1.5 PSF	80	25814
190 Series 4' x 8' Soffit 19/32" nominal thickness	Cedar	8 ft. (96 in.) (2.4 m)	47.81 in. (1214 mm)	0.578 in. (14.7 mm)	24 in. o.c.	2 PSF	60	25816*


★ Can be used in siding or soffit applications

*Special order item; Requires minimum quantity and extended lead times.


38 SERIES 4' x 8' CEDAR TEXTURE SOFFIT



76 SERIES 4' x 8' CEDAR TEXTURE SOFFIT




190 SERIES 4' x 8' CEDAR TEXTURE SOFFIT



38 SERIES DUAL USE SIDING AND SOFFIT PANEL – NO GROOVE SQUARE EDGE



38 SERIES SOFFIT – CUT-TO-WIDTH



All graphics are for illustrative purposes only.
See LPCorp.com for product, warranty, and installation information. Metric units are rounded. PSF = Pounds Per Square Foot

VENTED SOFFIT

Product:

LP® SmartSide® 38 Series Vented Soffit

DESIGNED & RATED FOR EXTERIOR USE

Substrate:

- Features engineered wood strand technology with precisely-sized, shaped, and layered wood strands from responsibly sourced logs
- Made using LP’s proprietary SmartGuard® process, which includes industrial-grade resins, water-resistant waxes, zinc borate, and a resin-saturated overlay



Sustainability Info:

- ASTM-Verified Carbon Negative
- Made with wood, a renewable resource, vetted through strict Sustainable Forestry Initiative® (SFI®) standards



Vented Soffit

3/8" Nominal Thickness
12" | 16" | 24"



Cedar Texture



Brushed Smooth




Vented Soffit

3/8" Nominal Thickness
12" | 16" | 24"

Specifications and PIDs:

PRODUCT	TEXTURE	LENGTH	ACTUAL WIDTH	THICKNESS	MAX SPAN RATING	WEIGHT	PCS/UNIT	PID
38 Series Vented Soffit Cut-to-Width	Cedar	16 ft. (192 in.) (4.9 m)	11.94 in. (303 mm)	0.354 in. (9 mm)	24 in. o.c.	1.5 PSF	180	25822
		16 ft. (192 in.) (4.9 m)	15.94 in. (405 mm)	0.354 in. (9 mm)	24 in. o.c.	1.5 PSF	135	25823
		16 ft. (192 in.) (4.9 m)	23.94 in. (608 mm)	0.354 in. (9 mm)	24 in. o.c.	1.5 PSF	90	25824
38 Series Vented Soffit Cut-to-Width	Brushed Smooth	16 ft. (192 in.) (4.9 m)	11.94 in. (303 mm)	0.354 in. (9 mm)	24 in. o.c..	1.5 PSF	180	46964
		16 ft. (192 in.) (4.9 m)	15.94 in. (405 mm)	0.354 in. (9 mm)	24 in. o.c.	1.5 PSF	135	46043
		16 ft. (192 in.) (4.9 m)	23.94 in. (608 mm)	0.354 in. (9 mm)	24 in. o.c.	1.5 PSF	90	46044

38 SERIES VENTED SOFFIT – CUT-TO-WIDTH

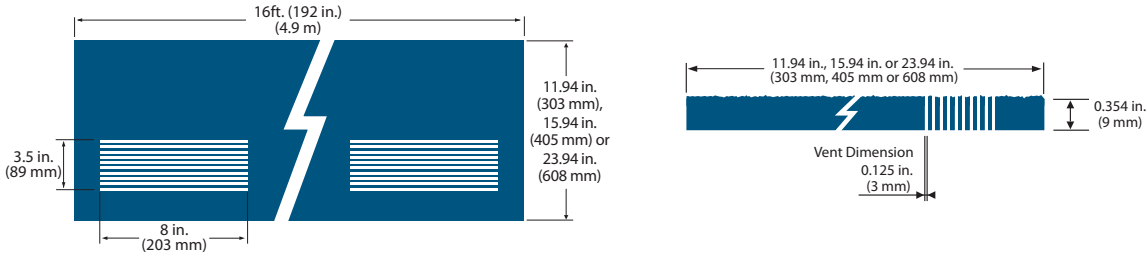

Application Instructions:

LPCorp.com/Literature



TRIM

Products:

- LP® SmartSide® 190 Series Trim
- LP® SmartSide® 440 Series Trim
- LP® SmartSide® 540 Series Trim

DESIGNED & RATED FOR EXTERIOR USE

Substrate:

- Features engineered wood strand technology with precisely-sized, shaped, and layered wood strands from responsibly sourced logs
- Made using LP’s proprietary SmartGuard® process, which includes industrial-grade resins, water-resistant waxes, zinc borate, and a resin-saturated overlay



Sustainability Info:

- ASTM-Verified Carbon Negative
- Made with wood, a renewable resource, vetted through strict Sustainable Forestry Initiative® (SFI®) standards



Application Instructions:

LPCorp.com/Literature



Trim

Various sizes and thicknesses



Cedar Texture



Brushed Smooth

Trim


Various sizes and thicknesses

Specifications and PIDs:


PRODUCT	TEXTURE	LENGTH	ACTUAL WIDTH	THICKNESS	WEIGHT	PCS/UNIT	PID
190 Series Trim 19/32" nominal thickness	Cedar	16 ft. (192 in.) (4.9 m)	2.50 in. (64 mm)	0.578 in. (14.7 mm)	2 PSF	270	28448
		16 ft. (192 in.) (4.9 m)	3.50 in. (89 mm)	0.578 in. (14.7 mm)	2 PSF	420	28450
		16 ft. (192 in.) (4.9 m)	5.50 in. (140 mm)	0.578 in. (14.7 mm)	2 PSF	240	28452
440 Series Trim 3/4" nominal thickness	Cedar	16 ft. (192 in.) (4.9 m)	1.50 in. (38 mm)	0.675 in. (17.1 mm)	2 PSF	384	25877
		16 ft. (192 in.) (4.9 m)	2.50 in. (64 mm)	0.675 in. (17.1 mm)	2 PSF	216	25878
		16 ft. (192 in.) (4.9 m)	3.50 in. (89 mm)	0.675 in. (17.1 mm)	2 PSF	350	25880
		16 ft. (192 in.) (4.9 m)	5.50 in. (140 mm)	0.675 in. (17.1 mm)	2 PSF	192	25882
		16 ft. (192 in.) (4.9 m)	7.21 in. (183 mm)	0.675 in. (17.1 mm)	2 PSF	144	25883
		16 ft. (192 in.) (4.9 m)	9.21 in. (234 mm)	0.675 in. (17.1 mm)	2 PSF	120	25884
		16 ft. (192 in.) (4.9 m)	11.21 in. (285 mm)	0.675 in. (17.1 mm)	2 PSF	96	25885
440 Series Trim 3/4" nominal thickness	Brushed Smooth	16 ft. (192 in.) (4.9 m)	1.50 in. (38 mm)	0.675 in. (17.1 mm)	2 PSF	384	46012
		16 ft. (192 in.) (4.9 m)	2.50 in. (64 mm)	0.675 in. (17.1 mm)	2 PSF	216	45999
		16 ft. (192 in.) (4.9 m)	3.50 in. (89 mm)	0.675 in. (17.1 mm)	2 PSF	350	46000
		16 ft. (192 in.) (4.9 m)	5.50 in. (140 mm)	0.675 in. (17.1 mm)	2 PSF	192	46001
		16 ft. (192 in.) (4.9 m)	7.21 in. (183 mm)	0.675 in. (17.1 mm)	2 PSF	144	46002
		16 ft. (192 in.) (4.9 m)	9.21 in. (234 mm)	0.675 in. (17.1 mm)	2 PSF	120	46003
		16 ft. (192 in.) (4.9 m)	11.21 in. (285 mm)	0.675 in. (17.1 mm)	2 PSF	96	46004
540 Series Trim 1" nominal thickness	Cedar	16 ft. (192 in.) (4.9 m)	1.50 in. (38 mm)	0.970 in. (24.6 mm)	3 PSF	256	25886*
		16 ft. (192 in.) (4.9 m)	2.50 in. (64 mm)	0.970 in. (24.6 mm)	3 PSF	162	25887*
		16 ft. (192 in.) (4.9 m)	3.50 in. (89 mm)	0.970 in. (24.6 mm)	3 PSF	252	25888
		16 ft. (192 in.) (4.9 m)	5.50 in. (140 mm)	0.970 in. (24.6 mm)	3 PSF	144	25890
		16 ft. (192 in.) (4.9 m)	7.21 in. (183 mm)	0.970 in. (24.6 mm)	3 PSF	108	25891
		16 ft. (192 in.) (4.9 m)	9.21 in. (234 mm)	0.970 in. (24.6 mm)	3 PSF	90	25892
		16 ft. (192 in.) (4.9 m)	11.21 in. (285 mm)	0.970 in. (24.6 mm)	3 PSF	72	25893
540 Series Trim 1" nominal thickness	Brushed Smooth	16 ft. (192 in.) (4.9 m)	1.50 in. (38 mm)	0.970 in. (24.6 mm)	3 PSF	256	46011
		16 ft. (192 in.) (4.9 m)	2.50 in. (64 mm)	0.970 in. (24.6 mm)	3 PSF	162	46010
		16 ft. (192 in.) (4.9 m)	3.50 in. (89 mm)	0.970 in. (24.6 mm)	3 PSF	252	45992
		16 ft. (192 in.) (4.9 m)	5.50 in. (140 mm)	0.970 in. (24.6 mm)	3 PSF	144	45993
		16 ft. (192 in.) (4.9 m)	7.21 in. (183 mm)	0.970 in. (24.6 mm)	3 PSF	108	45995
		16 ft. (192 in.) (4.9 m)	9.21 in. (234 mm)	0.970 in. (24.6 mm)	3 PSF	90	45997
		16 ft. (192 in.) (4.9 m)	11.21 in. (285 mm)	0.970 in. (24.6 mm)	3 PSF	72	45998

*Special order item; Requires minimum quantity and extended lead times.


190 SERIES CEDAR TEXTURE TRIM



440 SERIES TRIM

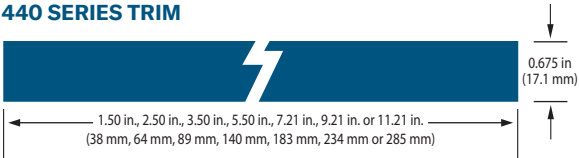

540 SERIES TRIM

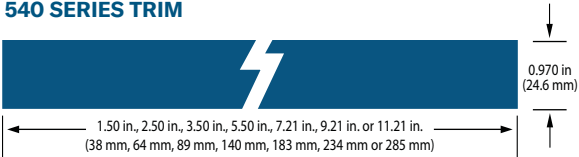

All graphics are for illustrative purposes only. See LPCorp.com for product, warranty, and installation information. Metric units are rounded. PSF = Pounds Per Square Foot

J-BLOCK & MINI-SPLIT

Products:

LP® SmartSide® J-Block
LP® SmartSide® Mini-Split

DESIGNED & RATED FOR EXTERIOR USE

Substrate:

- Features engineered wood strand technology with precisely-sized, shaped, and layered wood strands from responsibly sourced logs
- Made using LP’s proprietary SmartGuard® process, which includes industrial-grade resins, water-resistant waxes, zinc borate, and a resin-saturated overlay



Sustainability Info:

Made with wood, a renewable resource, vetted through strict Sustainable Forestry Initiative® (SFI®) standards



J-Block & Mini-Split

7.25" x 7.25" J-Block
7.25" x 6.75" Mini Split



Cedar Texture J-Block



Cedar Texture Mini-Split

Application Instructions:

LPCorp.com/Literature



Accessories Warranty:

5/10-Year Limited Warranty



Specifications and PIDs:

PRODUCT	HEIGHT	WIDTH	THICKNESS	PCS	PID
Cedar Texture J-Block	7.25 in. (184 mm)	7.25 in. (184 mm)	0.970 in. (24.6 mm)	10 per pack	43509
Cedar Texture Mini-Split	7.25 in. (184 mm)	6.75 in. (171 mm)	0.970 in. (24.6 mm)	10 per pack	43510



DARK BROWN FLOORING

Product:

LP® ProStruct® Dark Brown Flooring T&G

DESIGNED & RATED FOR INTERIOR SHED FLOORING

Substrate:

Features engineered wood strand technology with precisely-sized, shaped, and layered wood strands from responsibly sourced logs

Sustainability Info:

Made with wood, a renewable resource, vetted through strict Sustainable Forestry Initiative® (SFI®) standards



Specifications:

PRODUCT	LENGTH	ACTUAL WIDTH	THICKNESS	MAX SPAN RATING	PCS/UNIT	PID
19/32 LP® ProStruct® Dark Brown Flooring T&G	8 ft. (96 in.) (2.4 m)	4 ft. (47.5 in.) (1206 mm)	0.578 in. (14.7 mm)	20 in. o.c.	52	48291

LP® PROSTRUCT® DARK BROWN FLOORING T&G



LP® ProStruct®
Everyday Series™ Flooring

1/5
YEAR
PRORATED
LIMITED
WARRANTY

Application
Instructions:

LPCorp.com/Literature



GRAY FLOORING

Product:

LP® ProStruct® Gray Flooring T&G

DESIGNED & RATED FOR INTERIOR SHED FLOORING

Substrate:

Features engineered wood strand technology with precisely-sized, shaped, and layered wood strands from responsibly sourced logs

Sustainability Info:


Made with wood, a renewable resource, vetted through strict Sustainable Forestry Initiative® (SFI®) standards



Specifications:

PRODUCT	LENGTH	ACTUAL WIDTH	THICKNESS	MAX SPAN RATING	PCS/UNIT	PID
19/32 LP® ProStruct® Gray Flooring T&G	8 ft. (96 in.) (2.4 m)	4 ft. (47.5 in.) (1206 mm)	0.578 in. (14.7 mm)	20 in. o.c.	52	48290

LP® PROSTRUCT® GRAY FLOORING T&G

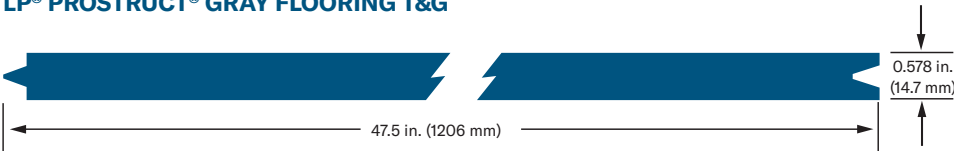

LP® ProStruct®
Everyday Series™ Flooring

1/5
YEAR
PRORATED
LIMITED
WARRANTY

Application
Instructions:

LPCorp.com/Literature



TWO-TONE FLOORING

Product:

LP® ProStruct® Two-Tone Flooring T&G
DESIGNED & RATED FOR INTERIOR SHED FLOORING

Substrate:

Features engineered wood strand technology with precisely-sized, shaped, and layered wood strands from responsibly sourced logs

Sustainability Info:

Made with wood, a renewable resource, vetted through strict Sustainable Forestry Initiative® (SFI®) standards



Two-Tone Flooring

19/32 Nominal Thickness
4' x 8'



LP® ProStruct® Two-Tone Flooring

Specifications:

PRODUCT	LENGTH	ACTUAL WIDTH	THICKNESS	MAX SPAN RATING	PCS/UNIT	PID
19/32 LP® ProStruct® Two-Tone Flooring T&G	8 ft. (96 in.) (2.4 m)	4 ft. (47.5 in.) (1206 mm)	0.578 in. (14.7 mm)	20 in. o.c.	52	48181

LP® PROSTRUCT® TWO-TONE FLOORING T&G



LP® ProStruct®
Everyday Series™ Flooring

1/5
YEAR
PRORATED
LIMITED
WARRANTY

Application
Instructions:

LPCorp.com/Literature



PREMIUM FLOORING

Product:

LP® ProStruct® Flooring with SmartFinish® Overlay
DESIGNED & RATED FOR INTERIOR SHED FLOORING

Substrate:

- Features engineered wood strand technology with precisely-sized, shaped, and layered wood strands from responsibly sourced logs
- Made using LP's proprietary SmartGuard® process, which includes industrial-grade resins, water-resistant waxes, zinc borate, and a resin-saturated overlay

Sustainability Info:

Made with wood, a renewable resource, vetted through strict Sustainable Forestry Initiative® (SFI®) standards



Premium Flooring

Nominal Thickness: 19/32 | 23/32
4' x 8'



LP® ProStruct® Flooring with SmartFinish® overlay


Application
Instructions:

LPCorp.com/Literature


Specifications:

PRODUCT	LENGTH	ACTUAL WIDTH	THICKNESS	MAX SPAN RATING	PCS/UNIT	PID
19/32 LP® ProStruct® Flooring with SmartFinish® Overlay	8 ft. (96 in.) (2.4 m)	4 ft. (47.875 in.) (1216 mm)	0.578 in. (14.7 mm)	20 in. o.c.	60	30631
19/32 LP® ProStruct® Flooring with SmartFinish® Overlay T&G	8 ft. (96 in.) (2.4 m)	4 ft. (47.5 in.) (1206 mm)	0.578 in. (14.7 mm)	20 in. o.c.	60	30633
23/32 LP® ProStruct® Flooring with SmartFinish® Overlay T&G	8 ft. (96 in.) (2.4 m)	4 ft. (47.5 in.) (1206 mm)	0.703 in. (17.8 mm)	24 in. o.c.	50	30628


19/32 LP® PROSTRUCT® FLOORING WITH SMARTFINISH® OVERLAY



19/32 LP® PROSTRUCT® FLOORING WITH SMARTFINISH® OVERLAY T&G



23/32 LP® PROSTRUCT® FLOORING WITH SMARTFINISH® OVERLAY T&G



LP® ProStruct®
Flooring with SmartFinish®

1/10
YEAR
PRORATED
LIMITED
WARRANTY



EVERYDAY ROOF SHEATHING

Product:
LP[®] SilverTech[®] Everyday Series™ Roof Sheathing
RADIANT BARRIER SHED ROOF SHEATHING

Substrate:
Features engineered wood strand technology with precisely-sized, shaped, and layered wood strands from responsibly sourced logs

Sustainability Info:
Made with wood, a renewable resource, vetted through strict Sustainable Forestry Initiative[®] (SFI[®]) standards




SUSTAINABLE FORESTRY INITIATIVE
SFI-00003

Specifications:

PRODUCT	LENGTH	ACTUAL WIDTH	THICKNESS	MAX SPAN RATING	PCS/UNIT	PID
7/16 LP [®] SilverTech [®] Everyday Series™ Roof Sheathing	8 ft. (96 in.) (2.4 m)	4 ft. (47.875 in.) (1216 mm)	0.418 in. (10.6 mm)	24 in. o.c.	69	48182

LP[®] SILVERTECH[®] EVERYDAY SERIES™ ROOF SHEATHING

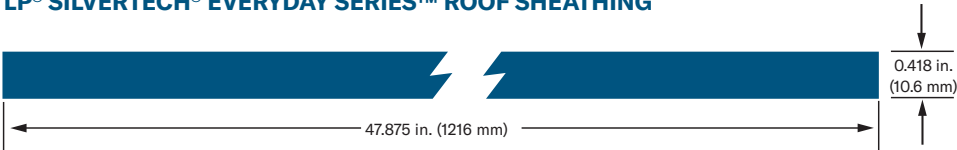

LP[®] SilverTech[®] Everyday Series™ Roof Sheathing

10 YEAR PRORATED LIMITED WARRANTY

Application Instructions:
LPCorp.com/Literature





PREMIUM ROOF SHEATHING

Product:
LP[®] SilverTech[®] Premium Roof Sheathing
RADIANT BARRIER SHED ROOF SHEATHING

Substrate:
Features engineered wood strand technology with precisely-sized, shaped, and layered wood strands from responsibly sourced logs

Sustainability Info:
Made with wood, a renewable resource, vetted through strict Sustainable Forestry Initiative[®] (SFI[®]) standards




SUSTAINABLE FORESTRY INITIATIVE
SFI-00003

Specifications:

PRODUCT	LENGTH	ACTUAL WIDTH	THICKNESS	MAX SPAN RATING	PCS/UNIT	PID
7/16 LP [®] SilverTech [®] Premium Roof Sheathing	8 ft. (96 in.) (2.4 m)	4 ft. (47.875 in.) (1216 mm)	0.418 in. (10.6 mm)	24 in. o.c.	80	29592

LP[®] SILVERTECH[®] PREMIUM ROOF SHEATHING

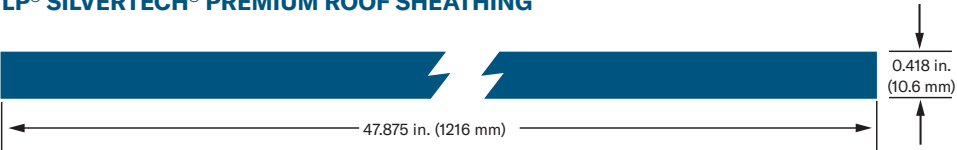

LP[®] SilverTech[®] Premium Roof Sheathing

20 YEAR PRORATED LIMITED WARRANTY

Application Instructions:
LPCorp.com/Literature





WE'RE HERE TO HELP.

The LP® Outdoor Building Solutions® team is always looking for ways to help make building and selling sheds easier for you.

With dedicated shed sales reps across the country, we're here to provide one-on-one support that makes a meaningful difference to your business.

To be put in touch with the LP Sales Rep for your area, call 1-800-334-3551



GET INSPIRED.

Explore our portfolio, visualize different styles, and help your customers find the right products at LPShed.com



ONE PORTFOLIO. THREE SOLUTIONS.



Outdoor Building Solutions®



LP® SmartSide® Trim & Siding

Durable trim and siding products engineered for long-lasting performance



LP® Everyday Series™ Shed Flooring & Roofing

Dependable, economical flooring and roofing products made for everyday shed use



LP® Premium Series Shed Flooring & Roofing

High-performance flooring and roofing products with enhanced durability and premium aesthetics



For more information, visit LPShed.com



WARNING: Drilling, sawing, sanding or machining wood products can expose you to wood dust, a substance known to the State of California to cause cancer. Avoid inhaling wood dust or use a dust mask or other safeguards for personal protection. For more information go to www.P65Warnings.ca.gov/wood.

© 2026 Louisiana-Pacific Corporation. Sustainable Forestry Initiative, SFI, and associated logo are registered trademarks of Sustainable Forestry Initiative, Inc. LEED is a registered trademark of the U.S. Green Building Council. WELL BUILDING STANDARD is a registered trademark of the International Well Building Institute. The National Green Building Standard is a registered trademark of the National Association of Home Builders of the United States.

For non-residential use only. The images in this catalog are for illustrative purposes only. Specifications subject to change without notice.

LPSHED0014 6/26