


E350

1P 10-60A

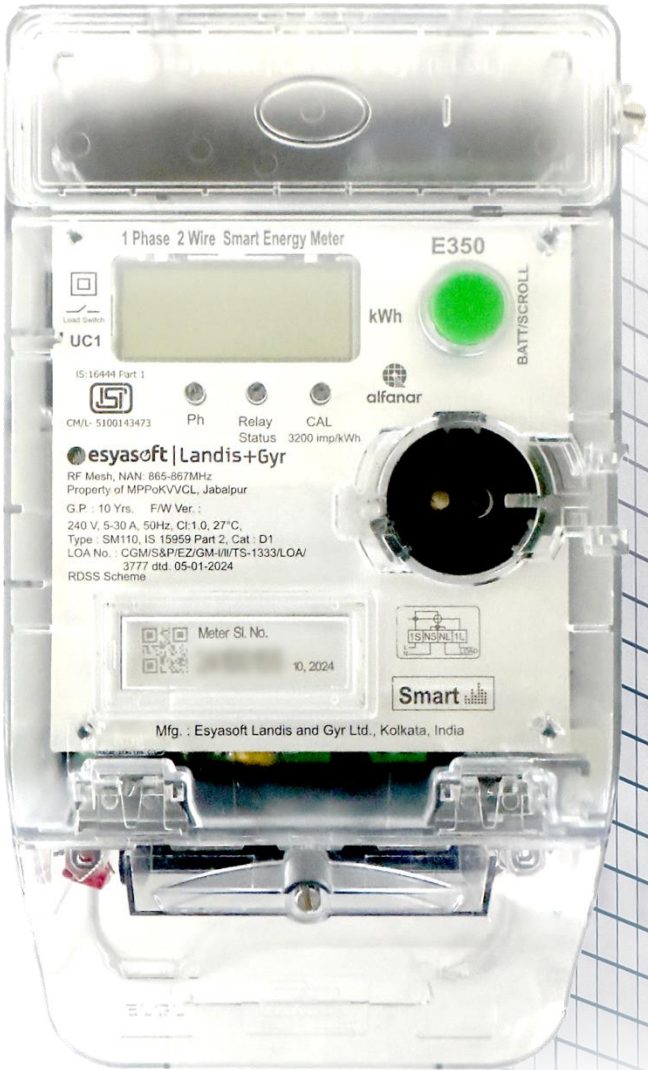

METER SPECIFICATIONS

Accuracy	Class 1.0
Voltage	240V (P-N) (-40% to +20%)
Current in Amps	5 (30), Ib (I _{max})
Frequency	50Hz (±10%)
DLMS	Category D1


DISPLAY	
Digit size in value field	10mm x 5mm
Number of digits	7
Display mode	2 (Power & battery)
Optical test output	Active energy Type
Meter Constant	3200 imp/kWh

MECHANICAL	
Weight	1.15Kg (approx.)
Width	146 mm
Height (without terminal cover)	213 mm
Height (with terminal cover)	263 mm
Depth	95 mm
Suspension	Inverted keyhole
Terminal cover	Long
Protection	IP 51
Mounting	Top mounting with 3 point fixing arrangement

POWER CONSUMPTION	
Voltage circuit	≤5W, 15VA – In idle mode ≤7W – In communication mode
Current circuit	≤5.76VA
Standard	IS-16444 Part 2, CBIP 325, IS-15959 Part 2

COMMUNICATION INTERFACE	
Optical Interface	According to IEC 62056-21 Type Serial
Max bit rate	9600 bps
Protocols	IEC 62056-21
Wireless Interface	Cellular Communication module
WAN	Cellular:(850/900/1800/2100/ 2300/2500 MHz)

CONNECTION DIAGRAM

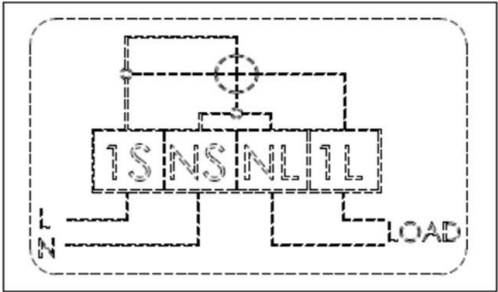

DIMENSIONS

