




Concrete Roof Tiles



BMI

Coverland

www.bmigroup.com/za

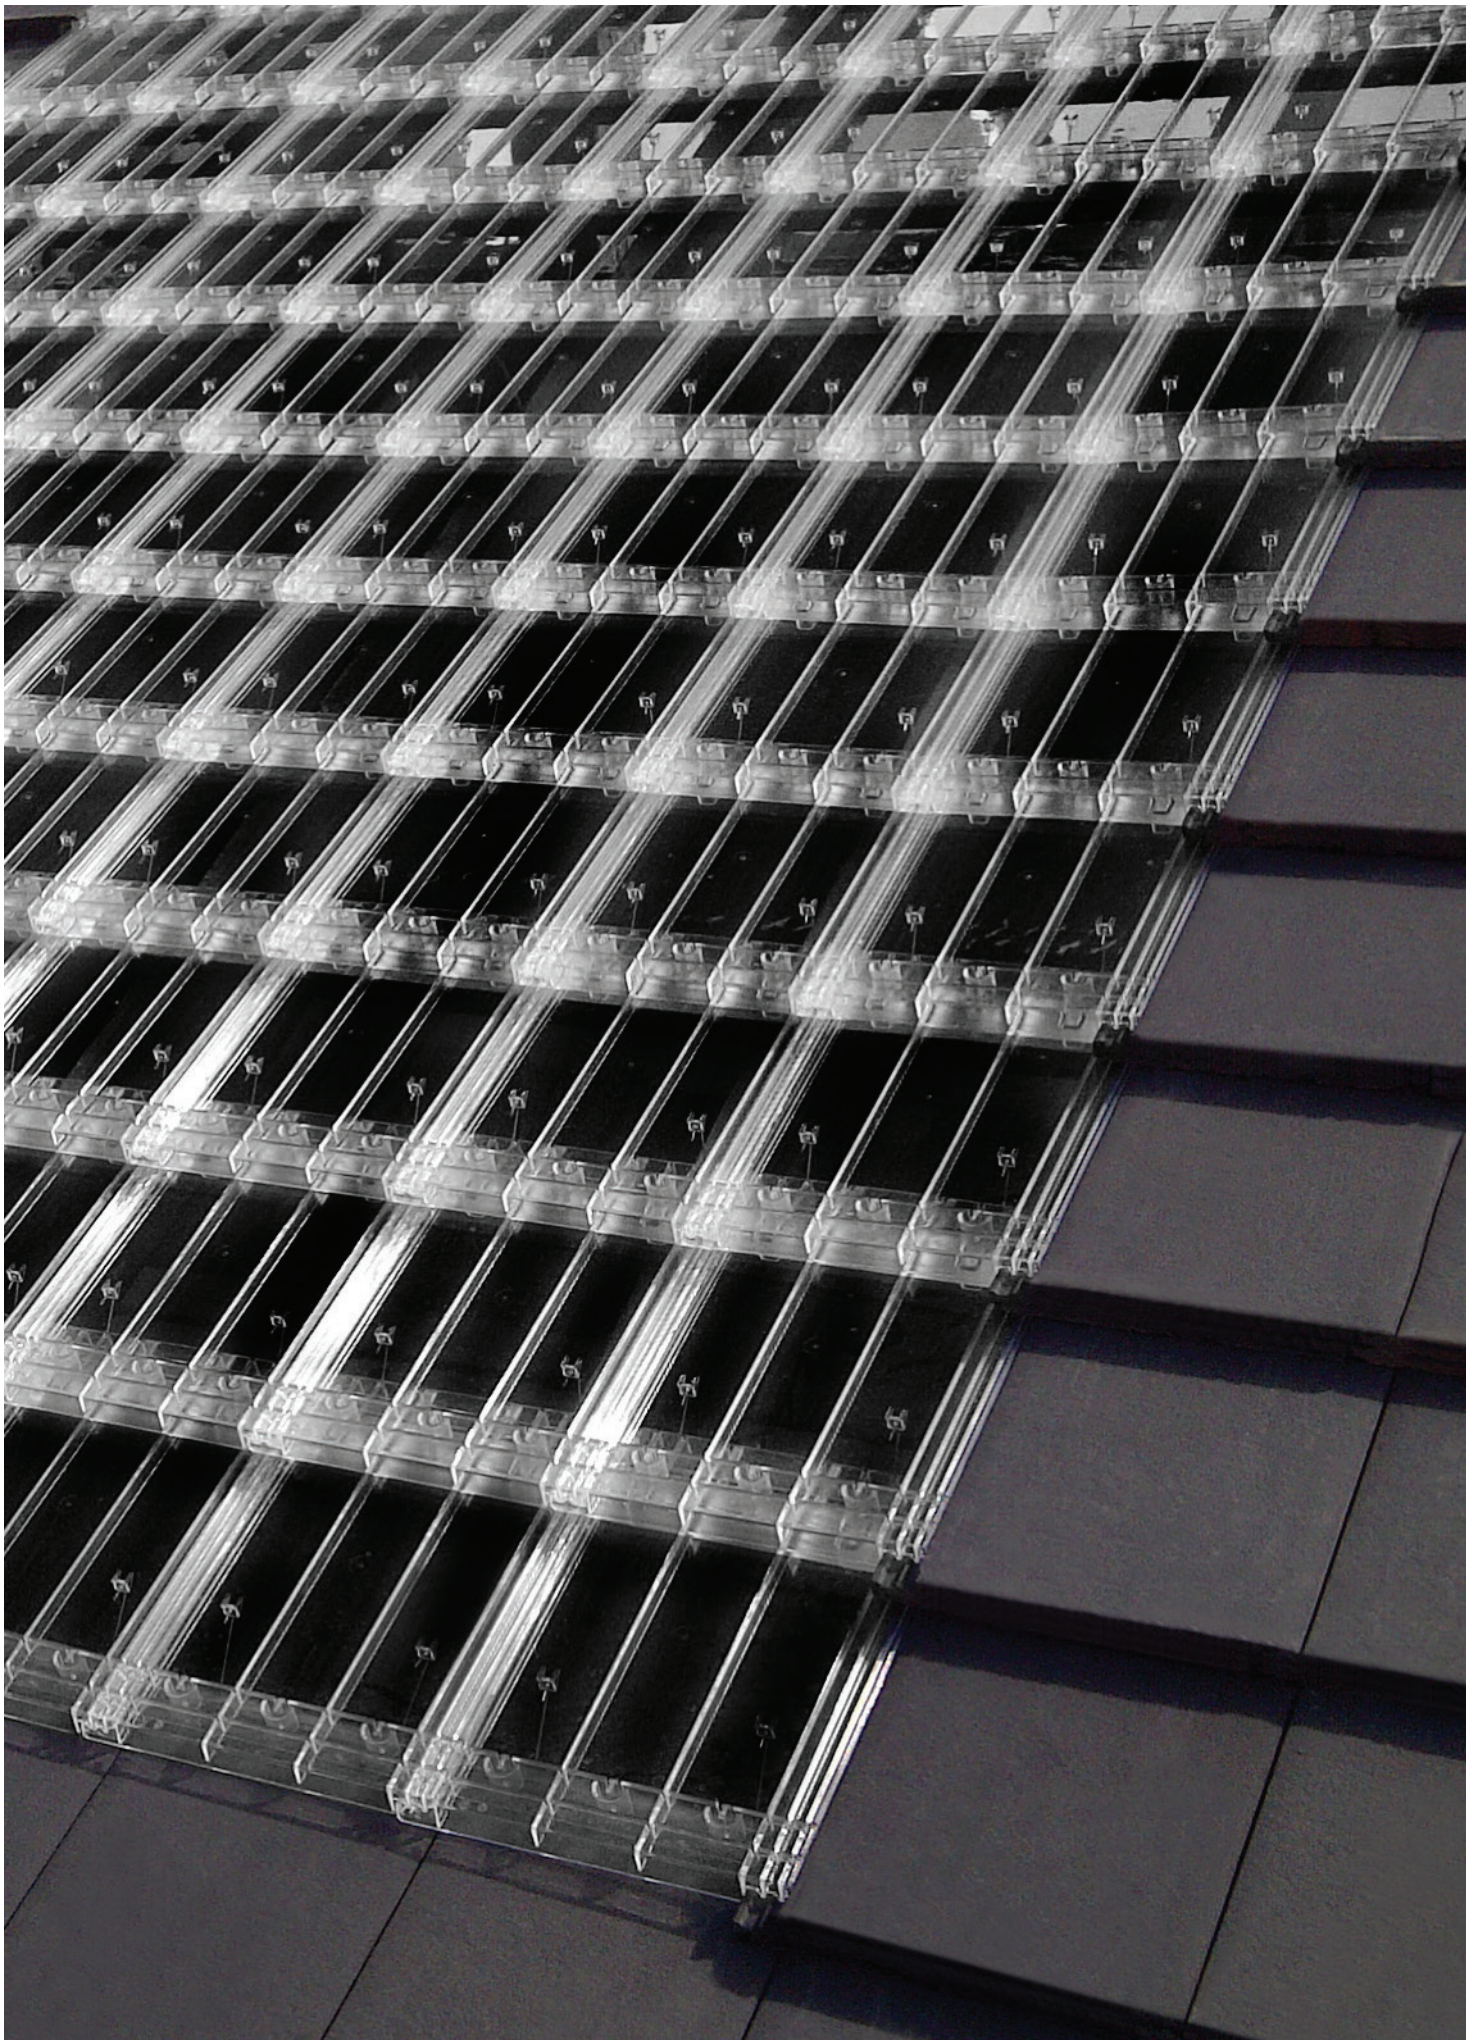

Elite Clear Tiles

Today concrete is an indispensable building material for the construction of modern buildings and a firm part of the appearance of our cities. Concrete tiles provide protection against wind and weather, and is an ecologically sound solution offering excellent value for money.

CHARACTERISTIC FINISHES

Through Colour

A single-shaded base colour throughout the roof tile displays a distinct roof surface.

Farmhouse®

The through colour tile is accentuated by a second colour, sporadically applied to give it a natural rustic appearance.

Vivid*

Our vivid tiles have an enriched body colour without the addition of a coating. Available in all standard colours.

ARKITONE MIX

The Arkitone Range is a Mediterranean concept of randomly laid concrete roof tiles of different colours creating an artistic style in roofing. It makes a quiet statement in superiority, status and appearance.

PREMIUM COATED FINISHES

Flair

The unique coating technique applied to the tiles, ensures a long-lasting and significantly richer colour appearance. The coating, tested in our weathering facilities in Germany, is formulated for UV-resistance and prevents efflorescence for a durable and ultra-solid finish.

An acrylic polymer emulsion film is applied to the wet tile. The coating is then cured onto the surface of the tile to create an inseparable bond of colour pigments with the tile. It effectively seals the pores of the tile, so that minerals do not reach the tile surface, and locks in the vibrant colour.

CLEAR TILES

The Clear Tile has been designed as a cost-effective means of illuminating rooms and is easy to install. It has the same dimensions as those of the standard profiles. It is produced to withstand the harshest elements for a prolonged period of time, is resistant to ultraviolet rays and will provide many years of trouble-free illumination. Available in Cupola, Double Roman, Elite, Perspective and Taunus.



A lot can change in 30 years, but your roof doesn't have to. With a track record of just over 70 years and the backing of BMI Technical Centre, we are proud to introduce our **30 Year Roof Tile Guarantee**.

Your roof is your protection from the elements, your shelter and with our guarantee, your peace of mind. Our concrete range is guaranteed against the event of damage to the weather resistance of the product resulting from a manufacturing defect. In the unlikely event that damage occurs, BMI Coverland will repair the affected product for the lifetime of the guarantee.

#becauseitsneverjustarroof


DISCLAIMER: The colour of these illustrations may vary due to the printing process. Coverland recommends that you view actual tile samples before reaching a purchase decision. Special colours are available on request at a minimum quantity order. *Vivid finish available in all standard colours. **30 year Roof Tile Guarantee:** T's & C's apply. For more information please contact your sales representative or email us at info.sa@bmigroup.com



Our Elite roof tile has a flat structured outline epitomising a flawless modern roof.



TECHNICAL DATA	
Overall size of tile (mm)	420 x 330
Approx mass per tile (kg)	5.2
Linear cover per tile (mm)	295

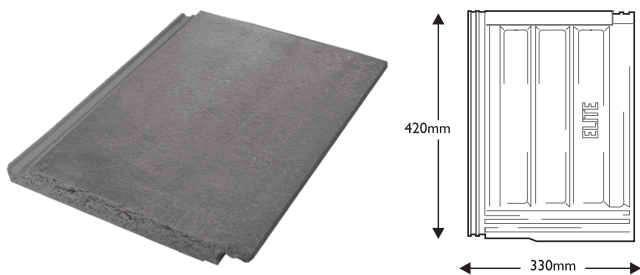

STRUCTURAL DATA		
The roof structure specifications should comply with the regulations in your area.		
Minimum pitch requirements	17° to 25°	26° and over
Rafter Centres	Up to 760 mm 38 x 38 Batten	Up to 950 mm 38 x 50 mm Batten on edge
Headlap (mm)	100	75
Batten Centres (mm)	320	345
Batten per m ² (m)	3.13**	2.9**
Number of tiles per m ²	10.6	9.8
Approx mass of tile m ² (kg)	55	50
Laying Application	Broken Bond	Broken Bond
Undertile Membrane/ Radenshield™ recommended at all pitches	Mandatory	Mandatory

** No allowance for wastage.



Through Colour
Slate Grey



Through Colour
Kanonberg
Black



Through Colour
Terracotta



Farmhouse
Slate Grey



Farmhouse
Kalahari



Farmhouse
Terracotta



Saxon Flair
Black



Flair
Granite




Flair
Black

FLAIR

Vibrant
Colours

Our Cupola roof tile denotes an unmistakable Mediterranean character with its deep rolls and bold tile curves.

TECHNICAL DATA	
Overall size of tile (mm)	420 x 330
Approx mass per tile (kg)	4.7-4.9
Linear cover per tile (mm)	300

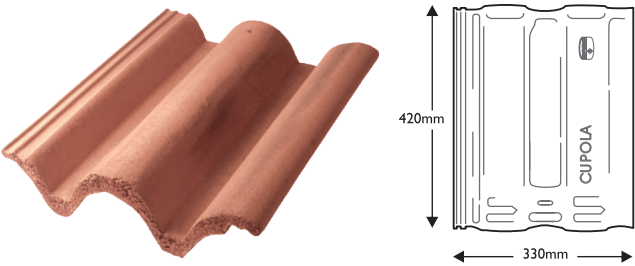

STRUCTURAL DATA		
The roof structure specifications should comply with the regulations in your area.		
Minimum pitch requirements	17° to 25°	26° and over
Rafter Centres	Up to 760 mm 38 x 38 Batten	Up to 950 mm 38 x 50 mm Batten on edge
Headlap (mm)	100	75
Batten Centres (mm)	320	345
Batten per m ² (m)	3.13**	2.9**
Number of tiles per m ²	10.42	9.66
Approx mass of tile m ² (kg)	±51	±47
Undertile Membrane/ Radenshield™ recommended at all pitches	Mandatory	Recommended

** No allowance for wastage.






Our Perspective roof tile is ultra-modern with an undulating contour giving a smooth aesthetic with solid functionality.



TECHNICAL DATA

Overall size of tile (mm)	420 x 330
Approx mass per tile (kg)	4.6
Linear cover per tile (mm)	300

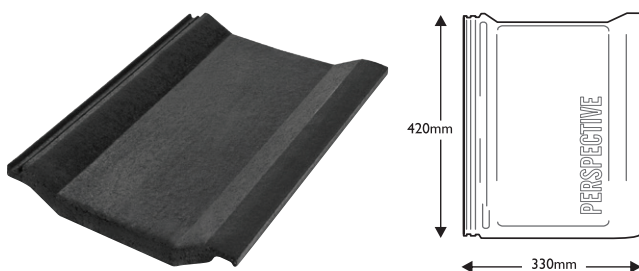


STRUCTURAL DATA

The roof structure specifications should comply with the regulations in your area.

Minimum pitch requirements	17° to 25°	26° and over
Rafter Centres	Up to 760 mm 38 x 38 Batten	Up to 950 mm 38 x 50 mm Batten on edge
Headlap (mm)	100	75
Batten Centres (mm)	320	345
Batten per m ² (m)	3.13**	2.9**
Number of tiles per m ²	10.42	9.66
Approx mass of tile m ² (kg)	52	44
Undertile Membrane/ Radenshield™ recommended at all pitches	Mandatory	Mandatory

** No allowance for wastage.

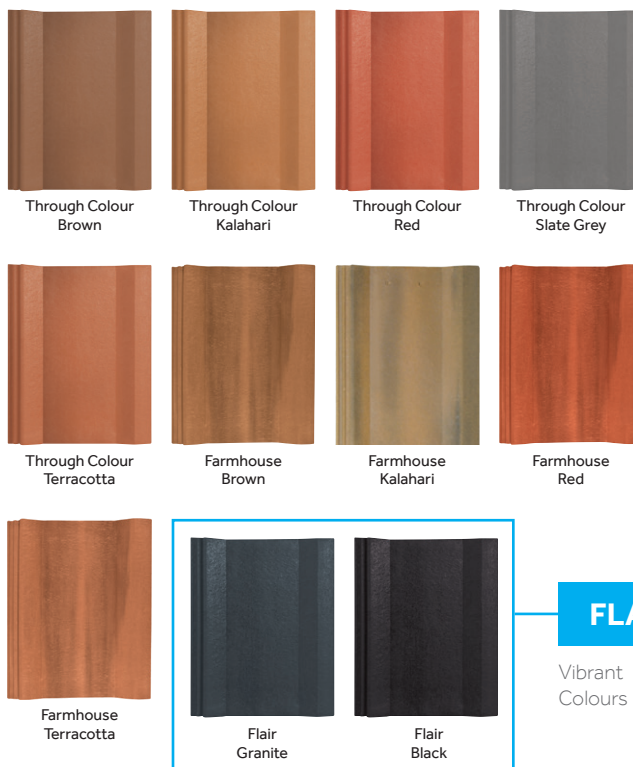




Our Double Roman roof tile is a classic for the subtle and timeless design.

TECHNICAL DATA

Overall size of tile (mm)	420 x 332
Approx mass per tile (kg)	4.2
Linear cover per tile (mm)	300

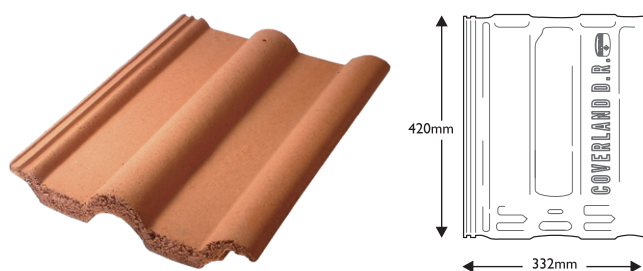


STRUCTURAL DATA

The roof structure specifications should comply with the regulations in your area.

Minimum pitch requirements	17° to 25°	26° and over
Rafter Centres	Up to 760 mm 38 x 38 Batten	Up to 950 mm 38 x 50 mm Batten on edge
Headlap (mm)	100	75
Batten Centres (mm)	320	345
Batten per m² (m)	3.13**	2.9**
Number of tiles per m²	10.42	9.66
Approx mass of tile m² (kg)	46	41
Undertile Membrane/ Radenshield™ recommended at all pitches	Mandatory	Recommended


** No allowance for wastage.

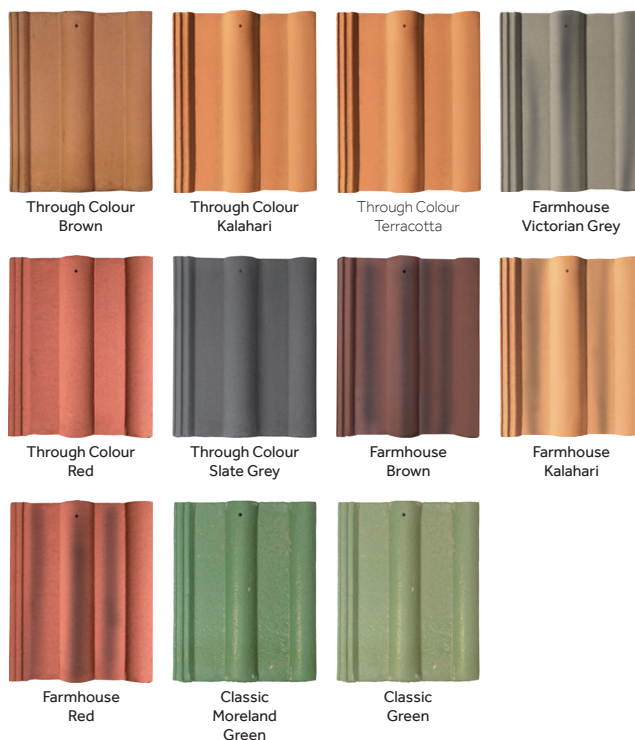

Our Taunus roof tile, though conventionally shaped, is striking and bold and adds charm to timeless and modern designs.

TECHNICAL DATA

Overall size of tile (mm)	420 x 330
Approx mass per tile (kg)	4.4
Linear cover per tile (mm)	300

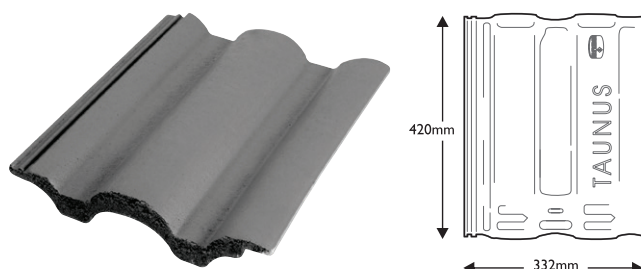

STRUCTURAL DATA

The roof structure specifications should comply with the regulations in your area.

Minimum pitch requirements	17° to 25°	26° and over
Rafter Centres	Up to 760 mm 38 x 38 Batten	Up to 950 mm 38 x 50 mm Batten on edge
Headlap (mm)	100	75
Batten Centres (mm)	320	345
Batten per m ² (m)	3.13**	2.9**
Number of tiles per m ²	10.42	9.66
Approx mass of tile m ² (kg)	46	43
Undertile Membrane/ Radenshield™ recommended at all pitches	Mandatory	Recommended

** No allowance for wastage.




Through Colour
Brown

Through Colour
Kalahari

Through Colour
Red

Through Colour
Slate Grey

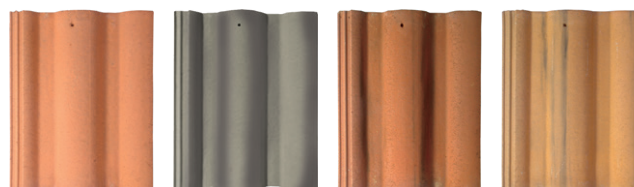

Through Colour
Terracotta

Farmhouse
Victorian Grey


Farmhouse
Brown

Farmhouse
Kalahari



Farmhouse
Red

Farmhouse
Terracotta



Flair
Granite

Flair
Black

FLAIR

Vibrant
Colours




The Renown is a neat low-profiled tile designed to blend unobtrusively into any environment with a more contemporary feel.

Only available in KwaZulu-Natal, Eastern Cape and Western Cape



TECHNICAL DATA

Overall size of tile (mm)	420 x 330
Approx mass per tile (kg)	4.4
Linear cover per tile (mm)	300

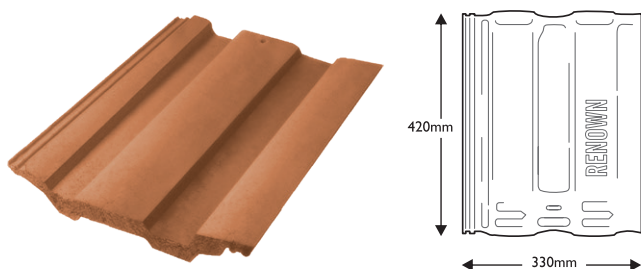

STRUCTURAL DATA

The roof structure specifications should comply with the regulations in your area.

Minimum pitch requirements	17° to 25°	26° and over
Rafter Centres	Up to 760 mm 38 x 38 Batten	Up to 950 mm 38 x 50 mm Batten on edge
Headlap (mm)	100	75
Batten Centres (mm)	320	345
Batten per m² (m)	3.13**	2.9**
Number of tiles per m²	10.42	9.66
Approx mass of tile m² (kg)	46	43
Undertile Membrane/ Radenshield™ recommended at all pitches	Mandatory	Recommended

** No allowance for wastage.



Through Colour
Red



Through Colour
Terracotta



Farmhouse
Terracotta



Farmhouse
Brown



Farmhouse
Red




Flair
Granite



Flair
Black

FLAIR

Vibrant
Colours

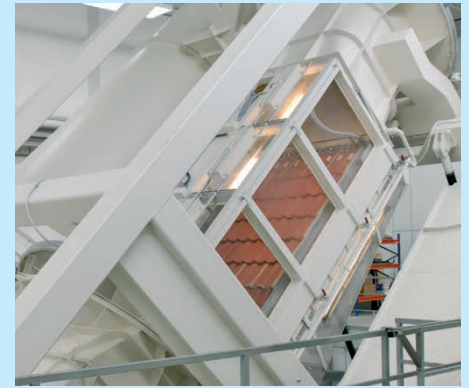

INTENSE PRODUCT TESTING

Our roofing products are tested in a wind tunnel unique to the industry, simulating wind and rain conditions found in a wide range of climate zones worldwide, including situations which typically arise only every 50 years. BMI only releases the new roofing materials when all trials as well as several hardness and long-term ageing tests have been successful.



SECURE YOUR ROOF

BMI Coverland offers quick and easy to install storm clips and nails for fast and professional securing of concrete and clay tiles. Our clips match the respective tile profiles exactly to provide reliable and durable protection against wind upliftment and slipping with an added security benefit against intruders entering the roof. See our Technical Guide for your area's specifications.



Coverland

BRANCHES

Bloemfontein	051 492 0210
Brits	010 492 8800
Cape Town	021 492 2230
Durban	031 565 3260
East London	043 492 0041
Germiston	010 492 8780
Isipingo	031 489 9862
Nelspruit	013 492 1930
Polokwane	015 495 0070
Port Elizabeth	041 492 0130
Richards Bay	035 797 2160

BMI Coverland (Pty) Ltd

Block 6
Constantia View Office Estate
2 Hogsback Avenue
Quellerina
011 222 7300
info.sa@bmigroup.com

Our expertise and innovations are bringing advantages in sustainability, performance and architectural design to residential, commercial, and public sector projects. Our product offering integrates functionality, energy efficiency and aesthetics for the homeowner. As the largest concrete roof tile manufacturer in Southern Africa, our reach expands across 7 production facilities and 4 depots nationally.

www.bmigroup.com/za