


Concrete Roof Tile Fittings

V-RIDGE HIP STARTER

| | |
|----------------|-------|
| No. per Hip | One |
| Thickness (mm) | 14-16 |
| Mass (kg) | ± 4.4 |


| | |
|--------|---|
| Fixing | Bed in mortar. Dry Ridge System recommended. |
| Laying | Open end butts next tile |



V-RIDGE TILE

| | |
|----------------|------------------|
| No. per LM | ± 2.2 tiles |
| Thickness (mm) | 12-14 |
| Mass (kg) | ± 4.0 (Standard) |


| | |
|--------|---|
| Fixing | Bed in mortar. Dry Ridge System recommended. |
| Laying | Butt jointed |

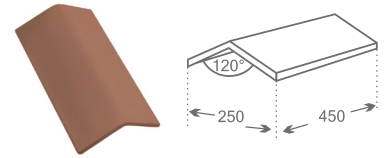

TAPERED HIP STARTER

| | |
|----------------|-------|
| No. per Hip | One |
| Thickness (mm) | 13-16 |
| Mass (kg) | ± 4.4 |


| | |
|--------|---|
| Fixing | Bed in mortar. Dry Ridge System recommended. |
| Laying | Overlapping |

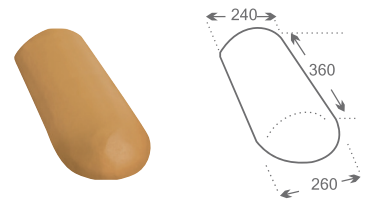

TAPERED RIDGE

| | |
|----------------|-------------|
| No. per LM | ± 2.5 tiles |
| Thickness (mm) | 13-16 |
| Mass (kg) | ± 4.2 |


| | |
|--------|---|
| Fixing | Bed in mortar. Dry Ridge System recommended. |
| Laying | Overlapping |

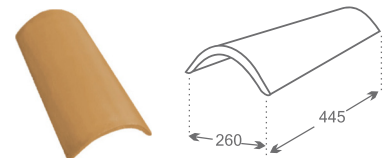

MONO RIDGE

| | |
|----------------|----------------|
| No. per LM | ± 2.2 tiles |
| Thickness (mm) | 14-16 |
| Mass (kg) | ± 5 (Standard) |

| | |
|--------|---|
| Fixing | Bed in mortar. Dry Ridge System recommended. |
| Laying | Butt jointed |

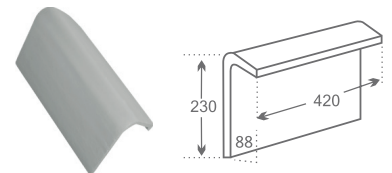

RAKE VERGE

| | |
|----------------|---------------------------|
| No. per Verge | One per tile course + one |
| Thickness (mm) | 14-16 |
| Mass (kg) | ± 5.4 (Standard) |

| | |
|--------|------------------------------------|
| Fixing | Two non-corrodible screws or nails |
| Laying | Overlapping |

