



ONT
(Optical Network Terminal)
White Openreach wall mounted box. Some models may vary in appearance (but function in the same way).

Alarm or loss of service (LOS) - Red alarm or LOS indicates an external fibre issue (or that the green optical cable is not plugged in).

ONT serial number



- LAN** - will flash green with internet traffic
- PON** - (Passive Optical Network). PON light should be solid green at all times
- Power** - light should be solid green at all times

Optical LAN Power ON/OFF



Fibre cable (from outside)


Power cable

Power button On/Off

Ethernet cable To router

Wi-Fi Hub 6

Wi-Fi On/Off button and WPS button on top of the router

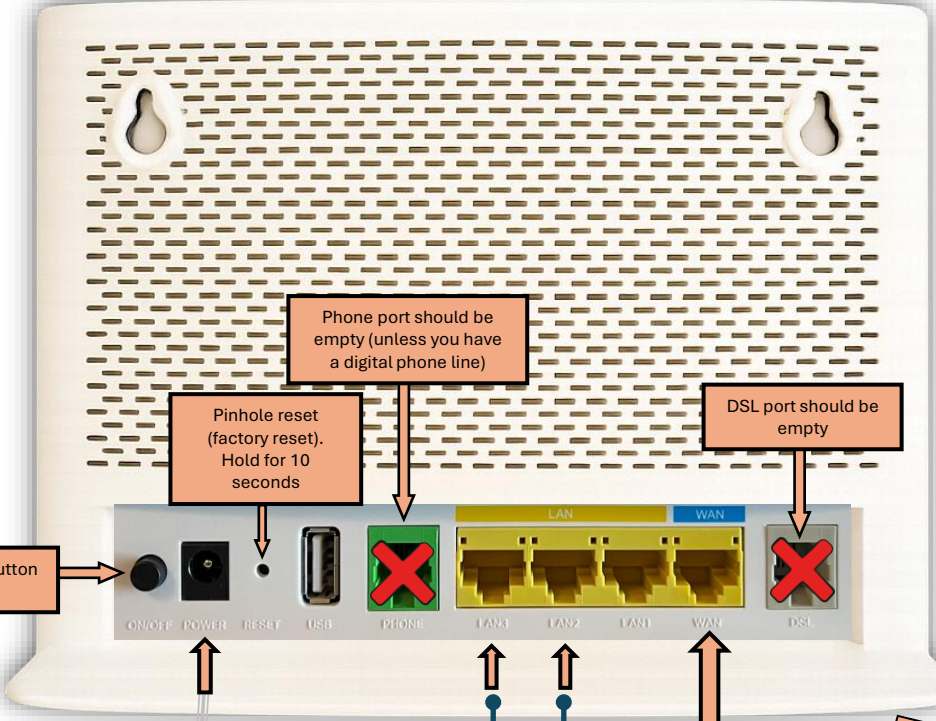

Phone port should be empty (unless you have a digital phone line)

Pinhole reset (factory reset). Hold for 10 seconds

DSL port should be empty

Router power button On/Off

Wi-Fi name (SSID) and password located on the underside of the router

Router power cable

Ethernet cables to 3rd party devices

Ethernet cable to router's WAN port

