

TITAN SERIES

LED STREET LIGHT

30W-330W





Features

1. Die-casting driver compartment and high purity aluminum for light source heat sink
2. Enclosure protection level: IP66. Impact resistance level: IK08
3. Independent compartment design
4. Various installation adaptors available
5. Different lens for different light distributions optional
6. NEMA standard twist lock receptacle optional
7. Optional motion sensor

Application

Parking lot, Stadium, Tennis court, High mast, City expressway, Major road, Collector road, Local road etc

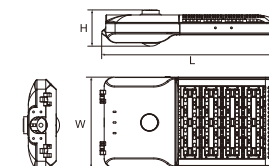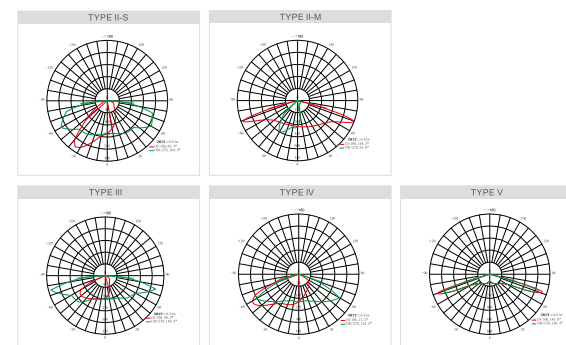

Technical parameter

Model No.	System Power	Luminous Efficiency	Structure Description	Product Size(L*W*H)mm	Weight(kg)
MS-ST480030	30W	120lm/W, 140lm/W	Die-casting+ stamping aluminium	435*342*137	6.9
MS-ST481060	60W	120lm/W, 140lm/W	Die-casting+ stamping aluminium	435*342*137	6.9
MS-ST482090	90W	120lm/W, 140lm/W	Die-casting+ stamping aluminium	515*342*137	7.8
MS-ST483120	120W	120lm/W, 140lm/W	Die-casting+ stamping aluminium	515*342*137	7.8
MS-ST484150	150W	120lm/W, 140lm/W	Die-casting+ stamping aluminium	595*342*137	8.5
MS-ST485180	180W	120lm/W, 140lm/W	Die-casting+ stamping aluminium	595*342*137	8.5
MS-ST486210	210W	120lm/W, 140lm/W	Die-casting+ stamping aluminium	675*342*137	9.4
MS-ST487240	240W	120lm/W, 140lm/W	Die-casting+ stamping aluminium	675*342*137	9.4
MS-ST488270	270W	120lm/W, 140lm/W	Die-casting+ stamping aluminium	755*342*137	10.3
MS-ST489300	300W	120lm/W, 140lm/W	Die-casting+ stamping aluminium	755*342*137	10.3
MS-ST490330	330W	120lm/W, 140lm/W	Die-casting+ stamping aluminium	835*342*137	11.3

