

# PLATO-SE SERIES

## LED TRI-PROOF LIGHT

### 30W-50W





### Features

1. Water-proof, dust-proof, impact-proof
2. One-batch forming thick Aluminium built-in PC pipe strong shock resistance and soft light
3. High quality waterproof gasket
4. Standard lumen efficiency: 130 lm/W
5. High light transmittance PC cover, good uniformity

### Application

Wildly used in all types of production line, food plant, cool house, parking lot, factory, freight yard, shopping mall, and supermarket. It can replace traditional tri-proof lamp

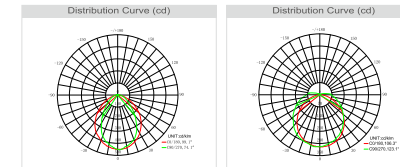

### Technical parameter

| Model No.         | System Power | Luminous Efficiency | Structure Description         | Length(mm) | Weight(kg) |
|-------------------|--------------|---------------------|-------------------------------|------------|------------|
| MS-LL1250-XXCE017 | 50W          | 130lm/W             | PC cover + extruded aluminium | 1500       | 1.3        |
| MS-LL1250-XXCE018 | 50W          | 125lm/W             | PC cover + extruded aluminium | 1500       | 1.3        |
| MS-LL0940-XXBE019 | 50W          | 120lm/W             | PC cover + extruded aluminium | 1500       | 1.3        |
| MS-LL0940-XXBE020 | 50W          | 115lm/W             | PC cover + extruded aluminium | 1500       | 1.3        |
| MS-LL0940-XXCE021 | 40W          | 130lm/W             | PC cover + extruded aluminium | 1200       | 1.1        |
| MS-LL0940-XXCE022 | 40W          | 125lm/W             | PC cover + extruded aluminium | 1200       | 1.1        |
| MS-LL0630-XXCE025 | 40W          | 120lm/W             | PC cover + extruded aluminium | 1200       | 1.1        |
| MS-LL0940-XXBE024 | 40W          | 115lm/W             | PC cover + extruded aluminium | 1200       | 1.1        |
| MS-LL0630-XXCE025 | 30W          | 130lm/W             | PC cover + extruded aluminium | 600        | 0.8        |
| MS-LL0630-XXCE026 | 30W          | 125lm/W             | PC cover + extruded aluminium | 600        | 0.8        |
| MS-LL0630-XXBE027 | 30W          | 120lm/W             | PC cover + extruded aluminium | 600        | 0.8        |
| MS-LL0630-XXBE028 | 30W          | 115lm/W             | PC cover + extruded aluminium | 600        | 0.8        |

IP65
IK08
CRI 80
220-240V
50-60Hz
PF > 0.9
10-85%RH
CCT 3000K / 4000K / 5000K
CCT 5700K / 6500K
50000h
-20°C / 45°C