





Features

- 1. Waterproof, dust proof, impact proof that is why they called tri-proof
- 2. One batch forming thick Aluminum built-in PC pipe, strong shock resistance and soft light
- 3. Water tight level: IP65, impact resistance: IK08
- 4. High light transmittance PC cover, good uniformity
- 5. Clip design on both sides, better for assembling and installation, tool free to wiring
- 6. 200-240V AC, 3000K, 4000K, 5000K, 6000KCCT






With a smooth even-output, the minimalist design of the Linear fixture led is clean and compact - great for applications such as refrigeration, task lighting, agriculture, or other low-clearance/tight environments. Linkable, you can quickly engineer a lighting layout to perfectly suit most applications


General task lighting

- **Retail environments**
- Commercial
- Refrigeration
- Agriculture
- Inspection lighting

Light Distribution



Product Dimension

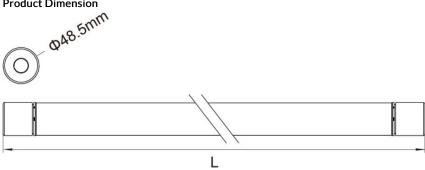

Technical parameter

Model No.	System Power	Luminous Efficiency	Structure Description	Length(mm)	Weight(kg)
MS-LL071532-XXBF	32W	120lm/W	PC cover + Extruded	1500	0.88
MS-LL071228-XXBF	28W	120lm/W	PC cover + Extruded	1200	0.75
MS-LL070920-XXBF	20W	120lm/W	PC cover + Extruded	900	0.6
MS-LL070615-XXBF	15W	120lm/W	PC cover + Extruded	600	0,4

