

VINCI SERIES

LED STREET LIGHT

20W-180W





Features

1. Die-casting aluminium housing, with IP66 enclosure protection level (IEC 60529) degree.
2. Mechanical strength : IK 08 , IEC 62262, impact energy: 5J.
3. With high transparent clear glass, 4mm tempered glass.
4. Tool free open driver compartment, internal electronic parts modular designed for easy maintenance.
5. Modular designed LED+PCB, 4 in 1 integrated optical lens, comply with ZHAGA standard.
6. CLASS I and CLASS II luminaries optional, with multiple functions quality driver, significant energy savings and a reduction of greenhouse gas emissions can be achieved.

Application

Roads, Parking lots, Roundabouts, Pedestrian, Bicycle paths, Pedestrian crossing.

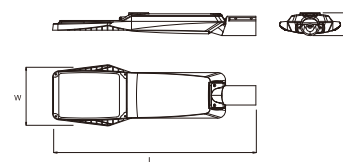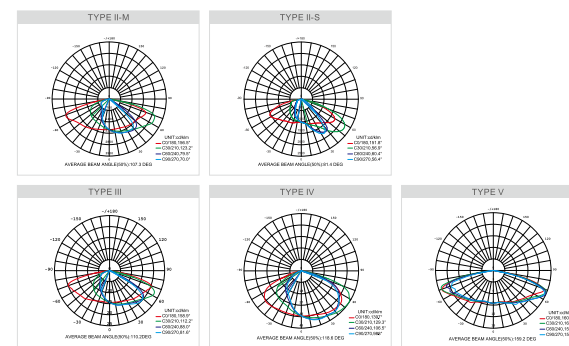

Technical parameter

System Power	System Power	Luminous Efficiency	Structure Description	Product Size(L*W*H)mm	Weight(kg)
MS-ST1098020	20W	140lm/W	Die-casting aluminum	685*218*85	4.8
MS-ST1099030	30W	140lm/W	Die-casting aluminum	685*218*85	4.8
MS-ST1100040	40W	140lm/W	Die-casting aluminum	685*218*85	4.8
MS-ST1101050	50W	140lm/W	Die-casting aluminum	685*218*85	4.8
MS-ST1102060	60W	140lm/W	Die-casting aluminum	685*218*85	4.8
MS-ST1103070	70W	140lm/W	Die-casting aluminum	753*240*87	6.5
MS-ST1104080	80W	140lm/W	Die-casting aluminum	753*240*87	6.5
MS-ST1105090	90W	140lm/W	Die-casting aluminum	753*240*87	6.5
MS-ST1106100	100W	140lm/W	Die-casting aluminum	753*240*87	6.5
MS-ST1107110	110W	140lm/W	Die-casting aluminum	753*240*87	6.5
MS-ST1108120	120W	140lm/W	Die-casting aluminum	753*240*87	6.5
MS-ST1109130	130W	140lm/W	Die-casting aluminum	867*285*100	9.0
MS-ST1110140	140W	140lm/W	Die-casting aluminum	867*285*100	9.0
MS-ST1111150	150W	140lm/W	Die-casting aluminum	867*285*100	9.0
MS-ST1112160	160W	140lm/W	Die-casting aluminum	867*285*100	9.0
MS-ST1113170	170W	140lm/W	Die-casting aluminum	867*285*100	9.0
MS-ST1114180	180W	140lm/W	Die-casting aluminum	867*285*100	9.0

