


TECHNICAL SPECIFICATIONS




| Model No. | MS-LI00806020 | MS-LI00812035 | MS-LI00815045 |
|--------------------------|-------------------------|----------------|----------------|
| Wattage | 20W | 35W | 45W |
| Input-voltage | AC220-240V | | |
| Frequency | 50/60Hz | | |
| Power factor | >0.9 | | |
| Dimming | yes | | |
| Luminous efficiency | 130-160lm/W | | |
| Color temperature | 3000K/4000K/5000K/6500K | | |
| CRI | >80 | | |
| Beam angle | 120° | | |
| Working temperature.(°C) | -20°C~+45°C | | |
| IP | IP65 | | |
| Lifeline | > 50000H | | |
| Product Size(φ*L)mm | φ70*L600mm | φ70*L1200mm | φ70*L1500mm |
| Outer Carton size(mm) | 740*363*370mm | 1340*363*253mm | 1640*363*253mm |
| Weight(kg) | 1.2 | 1.88 | 2.2 |

Product Size

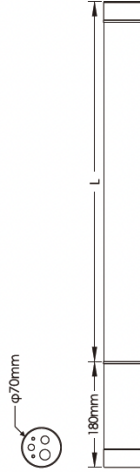

| Model No. | Product Size(φ*L)mm |
|---------------|---------------------|
| MS-LI00806020 | φ70*L600mm |
| MS-LI00812035 | φ70*L1200mm |
| MS-LI00815045 | φ70*L1500mm |

Distribution Curve (cd)

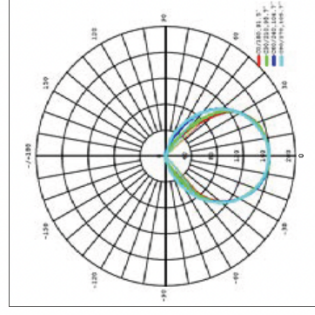

Application

Suitable for Gallery, factories, schools, supermarket, office buildings etc. different application lighting.

