

Trimble AP+ 30 Air

Next Generation Embedded GNSS-Inertial Solution for Robust Airborne Positioning and Direct Georeferencing

Powerful enough for use on manned platforms yet small enough for use on unmanned aerial vehicles (uavs)

The Trimble® AP+ Air GNSS-inertial system is comprised of next-generation compact, low-power hardware, featuring dual embedded survey-grade GNSS chipsets, an onboard Inertial Measurement Units (IMU), an external IMU, and the all-new Applanix® IN-Fusion®+ GNSS-aided inertial firmware.

Integrate Once, Use Many

The “Integrate once, use many” concept means a single hardware platform can be used to build a complete range of mapping payloads, from UAV to manned aircraft, using the same design. This consistency saves costs associated with design and integration.


The AP+ Air is configurable to support the Direct Georeferencing accuracy demands of everything from low-flying UAVs to high-altitude manned platforms. Compatible with photogrammetric cameras, LiDAR, hyperspectral and multispectral cameras, Synthetic Aperture Radar and virtually any other type of airborne remote sensor, the AP+ Air is a powerful, compact, and versatile solution. Easily integrated with any type of platform, AP+ Air saves significant costs in all types of surveys.

The Best Solution Just Got Better

The AP+ Air OEM solution is fully supported by the industry-leading Applanix POSPac™ MMS post-processing software, featuring Post-Processed Trimble CenterPoint® RTX for centimeter position accuracy without base stations, making it the ultimate solution for integrators wishing to produce a highly efficient airborne mapping system. For LiDAR integrators, the AP+ Air OEM is fully compatible with the POSPac MMS LiDAR Quality Control Tools for UAV.

Key Features

- “Integrate once, use many” concept means a single platform can be used to build a complete range of mapping payloads, from UAV to manned aircraft, using the same design, which saves costs
- Reduced SWaP
 - 54% smaller footprint, 64% lighter, 75% less power
- Next generation, survey-grade GNSS receiver
- Dual inertial support (onboard and external) for simple gimbal mount support
- Two antenna heading support
- Next generation In-Fusion+ Aided-Inertial Firmware
- Completely configurable, from entry-level UAV applications, all the way up to high-accuracy solutions for high altitude LiDAR mapping

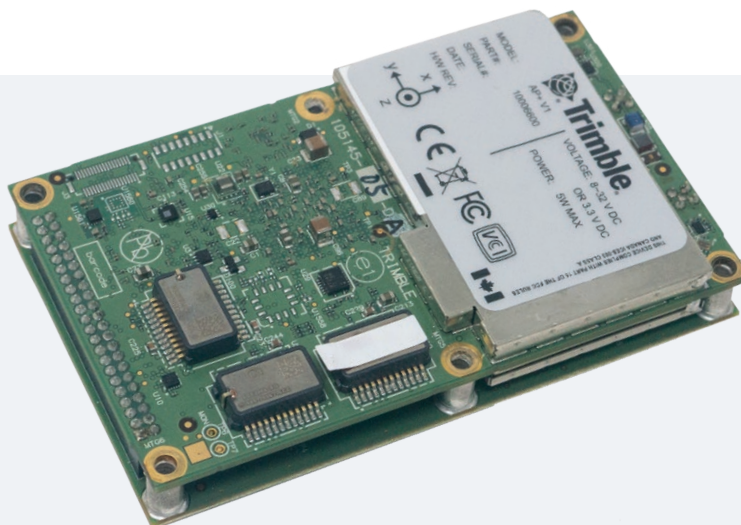

Trimble AP+ 30 Air

TECHNICAL SPECIFICATIONS

- Applanix IN-Fusion GNSS-inertial integration technology
- Onboard IMU with solid-state MEMS inertial sensors and Applanix SmartCal™ compensation technology
- High performance external IMU
- Advanced Trimble Maxwell™ Custom GNSS survey technology with 2 × 336 tracking channels
- Optional Dual Antenna, GAMS (GNSS Azimuth Measurement System) included
- Primary Antenna
 - GPS: L1 C/A, L2C, L2E, L5
 - GLONASS: L1 C/A, L2 C/A, L3 CDMA⁶
 - BeiDou: B1, B2, B3⁷
 - Galileo: E1, E5A, E5B, E5AltBOC, E6⁶
 - IRNSS: L5
 - QZSS: L1 C/A, L1S, L1C, L2C, L5, LEX
 - SBAS: L1 C/A, L5
 - MSS L-Band: Trimble RTX[®]
- Secondary Antenna:
 - GPS: L1 C/A, L2C, L2E, L5
 - GLONASS: L1 C/A, L2 C/A, L3 CDMA⁶
 - BeiDou: B1, B2, B3⁷
 - Galileo: E1, E5A, E5B, E5AltBOC, E6⁶
 - IRNSS: L5
 - QZSS: L1 C/A, L1S, L1C, L2C, L5, LEX
 - SBAS: L1 C/A, L5
- High-precision multiple correlator for GNSS pseudorange measurements
- Unfiltered, unsmoothed pseudorange measurements data with low noise, low multipath error, low time domain and high dynamic response
- Very low noise GNSS carrier phase measurements with <1 mm precision in a 1 Hz bandwidth
- Proven Trimble low elevation tracking technology
- Real-time GNSS L1, SBAS positioning mode
- Real-time 100 Hz position, attitude output, dual IMU 200 Hz data rate logging
- Navigation output format: ASCII (NMEA-0183), binary (Trimble GSOF)
- RTK license support for Reference Inputs CMR, CMR+, sCMRx, RTCM 2.1, 2.2, 3.0, 3.1, 3.2, sold separately
- Supported by POSPac MMS
- No export permit required

LAN INPUT/OUTPUT

All Ethernet functions are supported through dedicated IP address (static or DNS) simultaneously including web-based control GUI access and real-time data streaming TCP/IP and UDP..... ASCII and binary data streaming (time tag, PPS sync, status, position, attitude, velocity, track and speed, dynamics, performance metrics, GNSS data), configuration messages

HTTP Web-based control software (GUI) for easy system configuration and low rate display. Support for all common browsers (IE, Safari, Mozilla, Google Chrome, Firefox)

SERIAL INPUT/OUTPUT

RS232 ports (baud rates up to 460,800) ASCII and binary data streaming (time tag, PPS sync, status, position, attitude, velocity, track and speed, dynamics, performance metrics, GNSS data), reference input (CMR, CMR+, sCMRx, RTCM), configuration messages

USB 2.0 Device Configuration..... ASCII and binary data streaming (time tag, PPS sync, status, position, attitude, velocity, track and speed, dynamics, performance metrics, GNSS data), configuration messages

- 1 Typical performance. Actual results are dependent upon satellite configuration, atmospheric conditions and other environmental effects.
- 2 Typical mission profile, max RMS error (GAMS not required).
- 3 Real-time Trimble CenterPoint RTX correction service, typical airborne results, subject to regional coverage. Subscription sold separately, requires RTK license.
- 4 POSPac MMS, Single Base station or Applanix SmartBase™.
- 5 POSPac MMS, Post-Processed CenterPoint RTX, typical mission performance subscription sold separately. The accuracy is subject to quality of GNSS, data set duration, and regional coverage.
- 6 There is no official GLONASS L3CDMA or Galileo E6 ICD. The current tracking capability is based on publicly available information. Full receiver compatibility cannot be guaranteed.
- 7 The hardware of this product is designed for BeiDou B3 compatibility (trial version) and its firmware will be enhanced to fully support such new signal as soon as officially published ICD becomes available.
- 8 Does not include external IMU.
- 9 Performance based upon external IMU.
- 10 Subject to regional coverage

Specifications subject to change without notice.

OTHER INPUT/OUTPUT

PPS (pulse-per-second) Time synchronization

Event Input (2) Two time marks for external events, TTL 3.3V, 50 Hz max rate
Digital I/O (3) LED drivers with dedicated functionalities for system integrators

External IMU Interface Dedicated signals for external IMU support

LOGGING

Internal Logging 6 GB flash memory
External Logging USB 2.0 host configuration support for removable USB device
Parameters Time tag, status, position, attitude, velocity, track and speed, dynamics, performance metrics, raw IMU data (200 Hz), raw GNSS data (5 Hz)

PERFORMANCE

ABSOLUTE ACCURACY SPECIFICATIONS^{1,9} (RMS) – AIRBORNE APPLICATION

	SPS	SBAS ¹⁰	RTX ³	POST-PROCESSED-RTX ⁵	POST-PROCESSED ⁴
Position (m)	1.5 H 3 V	0.50 H 0.85 V	0.04 H 0.08 V	0.03 H 0.06 V	0.02 H 0.05 V
Velocity (m/s)	0.050	0.050	0.020	0.010	0.010
Roll & Pitch (deg)	0.020	0.015	0.010	0.010	0.010
True Heading ² (deg)	0.100	0.080	0.050	0.025	0.025

PHYSICAL CHARACTERISTICS

Size⁸ 100 × 60 × 21 mm
Weight⁸ 100 g
Power⁸ 7W max, 8-34V DC or 3.3V DC
Connectors Samtec LSHM-140-03.0-L-DV-A-N
Antenna Port 2 × MMCX receptacle
..... Output Voltage: Primary 7.5 VDC
..... Secondary 5 VDC
..... Maximum Current: 400 mA
..... Minimum Input Signal Strength: 32 dB (>35 dB recommended)

ENVIRONMENTAL CHARACTERISTICS

Temperature..... -40 °C to +75 °C (Operational)
-55 °C to +85 °C (Storage)
GNSS Operating Limit 515 m/sec, 18,000 m

ADDITIONAL ACCESSORIES

Evaluation Kit..... Includes development board, power supply, and short antenna cables (sold separately)

INERTIAL MEASUREMENT UNITS (IMU)

TYPE	RANGE	OPERATIONAL TEMPERATURE	POWER	SIZE (L × W × H) mm	WEIGHT (kg)
Internal Onboard IMU-79	+/-6 g +/-350 dps	-40 °C to +75 °C	n/a	n/a	n/a
External IMU- 82	+/-10 g +/-490 dps	-40 °C to +85 °C	4.75 to 36V DC 4W max	61 × 68 × 65	0.33
External IMU- 93	+/-10 g +/-490 dps	-40 °C to +85 °C	4.75 to 28V DC 4W max	50 × 50 × 50	0.18

APPLANIX

Canada:
85 Leek Crescent,
Richmond Hill,
ON Canada L4B 3B3
T+1-289-695-6000

United Kingdom:
Forester's House,
Old Racecourse,
Oswestry UK SY10 7PW
T+44-1691-700500

USA:
15840 FM 529 Rd, Suite 316,
Houston, Texas, 77095
T+1-713-936-2990