



# Trimble AV37 Antenna

## HIGH PERFORMANCE ANTENNA FOR AIRBORNE MAPPING AND SURVEYING APPLICATIONS

The Trimble AV37 GNSS antenna is designed to support centimeter-level accuracy in a lightweight, aerodynamic housing. The antenna is FAA certified and designed with ARINC 743 footprint making it ideal for aerial mapping applications.

### COMPREHENSIVE GNSS SUPPORT

The Trimble AV37 antenna offers full support for current and near-future GNSS signals including GPS, GLONASS, Galileo, BeiDou, QZSS, OmniSTAR, Trimble RTX and SBAS.

### ROBUST, LOW-MULTIPATH GPS ANTENNA

Mapping and surveying from the air using GNSS requires survey grade antenna technology in a compact and reliable form factor. The Trimble AV37 GNSS aviation antenna achieves this without compromising performance.

## Key Features

- ▶ Comprehensive GNSS support including GPS modernization signals, GLONASS, BeiDou and Galileo
- ▶ FAA Certified
- ▶ Low-profile design and ARINC 743 footprint
- ▶ SBAS, L-Band support



# Trimble AV37 GNSS Antenna

## TECHNICAL SPECIFICATIONS

- Comprehensive GNSS Tracking:
  - GPS: L1, L2
  - GLONASS: L1, L2
  - Galileo: E1
  - BeiDou: B1
  - SBAS: WAAS, EGNOS, GAGAN, and MSAS
  - MSS: OmniSTAR, Trimble RTX
- Quality signal tracking
- TNC female signal connector
- Small cross-sectional area to reduce aerodynamic drag
- Integral low noise amplifier
- Powered by GNSS receiver via coaxial cable
- High gain for reliable tracking in difficult environments
- FAA certificate supplied with each antenna

## PART NUMBERS

- 82745 (US) ..... Trimble AV37 Antenna
- 82745-10 ..... Trimble AV37 Antenna (Non-US Orders)

## PHYSICAL AND ELECTRICAL SPECIFICATIONS

Dimensions ..... 11.9 cm length, 7.6 cm width, 2.3 cm height  
 4.7" length, 3.0" width, 0.92" height

Weight ..... 0.283 kg (0.625 lbs)

Operating Temperature... -55 °C to +85 °C (-67 °F to +185 °F)

Altitude ..... ≤ 16,764 m (55,000 ft)

Finish ..... Polyurethane enamel, fluid resistant

Compliance ..... ROHS

Designed to ..... DO-160E, ARINC 743 Footprint, RTCA DO-210D

MTBF ..... Airborne, per MIL-HDBK-217, at an ambient temperature of +70°C  
 122,752 hours for Inhabited Cargo (AIC) environment  
 70,501 hours for Uninhabited Cargo (AUC) environment

Frequencies ..... 1570 +/- 45 MHz  
 1238 +/- 21.5 MHz

Signal gain ..... 43 dB


Voltage ..... 5 V DC to 15 V DC

Polarization ..... Right Hand Circular

Axial Ratio ..... 3 dB Max @ boresight

Amplifier Noise Figure ..... 2.5 dBMax

Impedance ..... 50 Ohms  
 VSWR : ≤ 1.5

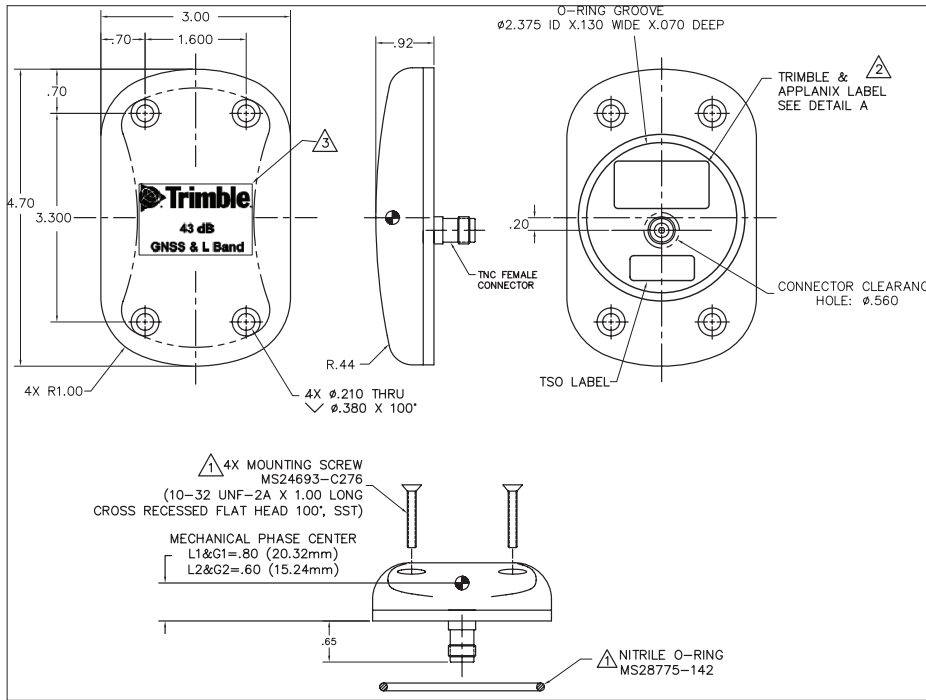

Specifications subject to change without notice.

Contact your local dealer today

**TRIMBLE**  
 Integrated Technologies  
 510 DeGuigne Drive  
 Sunnyvale, CA 94085  
 Americas & Asia-Pacific  
 Europe/EMEA

Email: sales-intech@trimble.com

© 2019, Trimble Navigation Limited. All rights reserved. Trimble logo are trademarks of Trimble, registered in the United States and in other countries. All other trademarks are the property of their respective owners. (08/19)