



# ANRIN HYDROTEC

SCANDIC SN 640

ISO 9001-2015

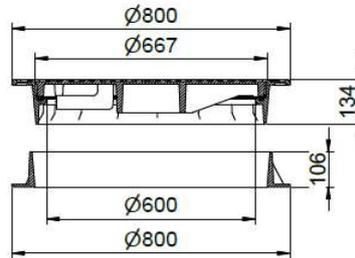

SA0712-01/02

| Reference | Class | Standard   | Material | Weight     | Sold by Pallet |
|-----------|-------|------------|----------|------------|----------------|
| 8947121   | D 400 | DIN EN 124 | EN-GJS   | ca. 108 kg | 5              |

## SCANDIC SN 640

The intelligent solution of self-leveling/floating frame. Loading class D400 for use on carriageways of roads for areas with medium traffic (MT).

### Frame

- self-levelling / roll-in frame
- becomes an integrated part of the road surface
- relief on the shaft of up to 70%
- suitable for shafts of dia. 640/650mm
- leveling height ca. 100mm
- including adapter frame

### Locking

- innovative 2 point spring locking system
- hinders unauthorised opening = anti-theft
- through the positioning of the locking points the cover is centred in the frame and is frictionally locked

### Insert

- HYDROpen, changeable dampening insert
- long life, high abrasion stability for extreme loads

### Options

- SCANDIC SN 640/270 (894712)
- SCANDIC SN 600
- Cover with PUR-insert D400
- SCANDIC SN 700

optimised cover design



2 point locking system



ANRIN Nordic AB  
Telivägen 8  
14941 NYNÄSHAMN



[info@hydrotec.se](mailto:info@hydrotec.se)



+46-(0)10-209 9 209



[www.hydrotec.se](http://www.hydrotec.se)