

**SHRINK TANK**

AT 6 / 7



## *Supervac AT 6 / 7 – optimal shrink results.*

### Your benefits

- ◆ Rugged stainless steel construction for maximum hygiene and durability.
- ◆ 25% - 30% more shrink performance due to full immersion in water.
- ◆ Compact size
- ◆ Excellent insulation of the entire housing to prevent heat loss.
- ◆ Automatic monitoring of the water level.
- ◆ Adjustment of parameters such as immersion time, immersion depth, drip-off time.
- ◆ Touch screen for easy operation.
- ◆ Use of tried-and-tested electronics and pneumatics components.
- ◆ Rapid heating.
- ◆ Hygienic design – easy to clean.

### Options AT 6 and AT 7

- ◆ Extractor hood to recirculate the condensation into the immersion basin; with 3 curtains made of transparent plastic.
- ◆ Automatic water level check.




### Additional options for AT 7

- ◆ Infeed rollers.
- ◆ Outfeed rollers with drip tray.





Technical data	AT 6	AT 7
External dimensions (l x w x h)	700 x 620 x 1550 mm	1018 x 755 x 1550 mm
Area of the immersion platform	570 x 400 mm	730 x 535 mm
Immersion depth	250 mm	250 mm
Heating capacity	9 kW	15 kW
Basin volume	70 l	140 l
Weight	105 kg	135 kg

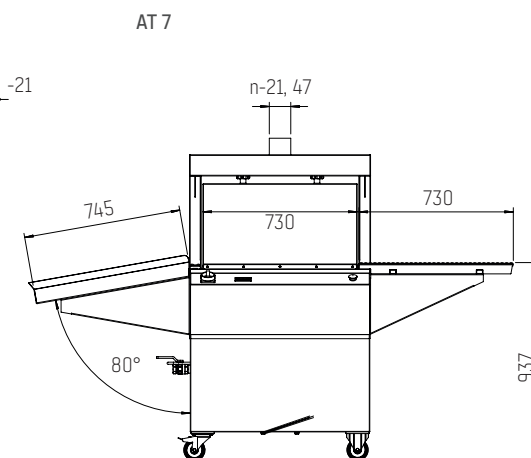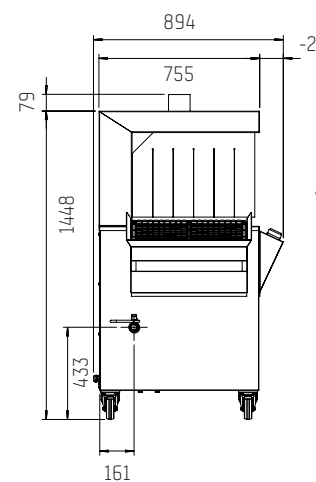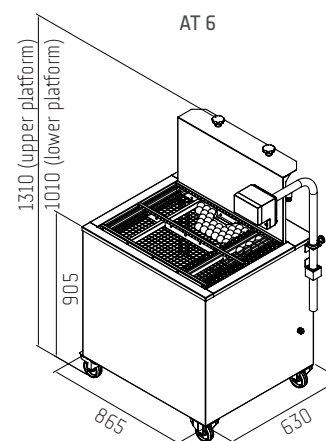



**supervac**   
FIRST CLASS PERFORMANCE

**Supervac Maschinenbau GmbH**  
Kalterer Gasse 10  
2340 Mödling | Austria

**T:** +43 2236 50 25 00

**E-mail:** [office@supervac.at](mailto:office@supervac.at)  
**Web:** [www.supervac.at](http://www.supervac.at)