

TABLE MACHINE

GK 90 / 126



**Your benefits**

- ◆ Constructed of corrosion-resistant stainless steel.
- ◆ Transparent lid.
- ◆ Digital control.
- ◆ Built-in BUSCH vacuum pump with motor protection.
- ◆ Reliable.
- ◆ Service-friendly.
- ◆ Hygienic design – easy to clean.
- ◆ Easy to operate.

*Reliability in a compact form.
Vacuum packaging for food such as
meat and meat products, sausages,
cheese, fish, etc. – no weight loss,
longer shelf life!*

Standard equipment GK 90

- ◆ 1 program.
- ◆ Single sealing.
- ◆ 8 m³/h pump.

Standard equipment GK126

- ◆ 10 programs.
- ◆ Parallel sealing or single sealing + separate sealing.
- ◆ Vacuum sensor with steam point detection.
- ◆ 16 m³/h pump.


Options

- ◆ Gas flushing.
- ◆ 21m³/h pump.
- ◆ Second sealing bar in the rear.


**Digital control**

- ◆ Simple and easy touch-screen operation.
- ◆ Electronic monitoring of the work process and displays in comprehensible and well-arranged on-screen menus.

GK 90

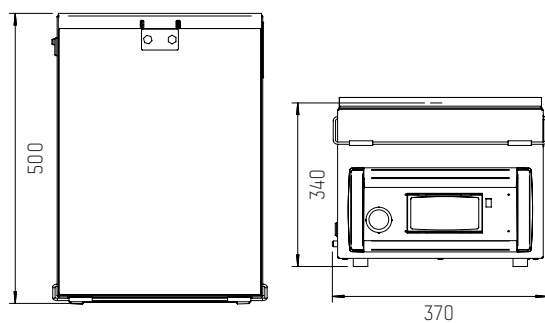

GK 126

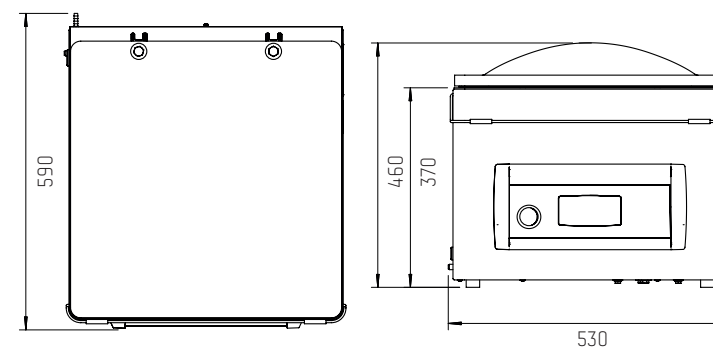

Technical data	GK 90	GK 126
External dimensions (l x w x h)	370 x 500 x 300 mm	530 x 590 x 460 mm
Chamber dimensions (l x w x h)	270 x 310 x 100 mm	420 x 370 x 180 mm
Sealing bar length	270 mm	420 mm
Max. product length	310 mm	370 mm
Max. product height	100 mm	180 mm
Built-in Busch vacuum pump	8 m ³ /h	16 / 21 m ³ /h
Connection power	0.75 kW	1.15 kW / 1.55 kW
Weight approx.	25 kg	60 kg
Power supply	230V, 1Ph, 50/60Hz	230V, 1Ph, 50/60Hz
	110V, 1Ph, 60Hz	110V, 1Ph, 60Hz



supervac 
FIRST CLASS PERFORMANCE

Supervac Maschinenbau GmbH
Kalterer Gasse 10
2340 Mödling | Austria

T: +43 2236 50 25 00

E-mail: office@supervac.at
Web: www.supervac.at