


GRINDING MACHINES

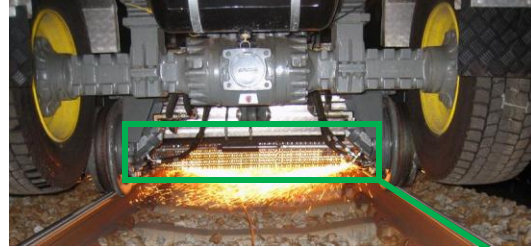

Grinding unit need to be aligned

Machine Category:
Rail grinding vehicles

Industry: Buses, Trucks

Country: Switzerland

Product Series:
TILTIX Mems HD

Specification:
MEMS based inclinometer, 2-axis, analog output,
Heavy Duty design, M12 connector

Competing Technical Solution: inclinometers
from Gemac

Benefits of Technical Solution

The inclinometer is used to align the grinding unit to the rail. Due to the heavy duty design it withstand the difficult environmental conditions like dust, dirt, vibrations

Reasons for Choosing POSITAL

Good price – performance ratio, good quality, withstand harsh environment, good support & service from OmniRay.

Author: ILA



Confidential! For internal use and training of authorized sales partners of POSITAL only.
Information may not be disclosed to third parties!

AMERICAS
FRABA Inc.
1800 East State Street, Suite 148
Hamilton, NJ 08609-2020, USA
T +1 609 750-8705, F +1 609 750-8703
www.posital.com, info@posital.com

EUROPE
FRABA AG
Carlswerkstrasse 13c
D-51063 Köln, GERMANY
T +49 221 96213-0, F +49 221 96213-20
www.posital.eu, info@posital.eu

ASIA
FRABA Pte. Ltd.
60 Alexandra Terrace,
#02-05 The Comtech, SINGAPORE 118502
T +65 6514 8880, F +65 6271 1792
www.posital.sg, info@posital.sg