


Choosing the right Display



September 2024

Choosing the right UltraSharp PremierColor Monitor

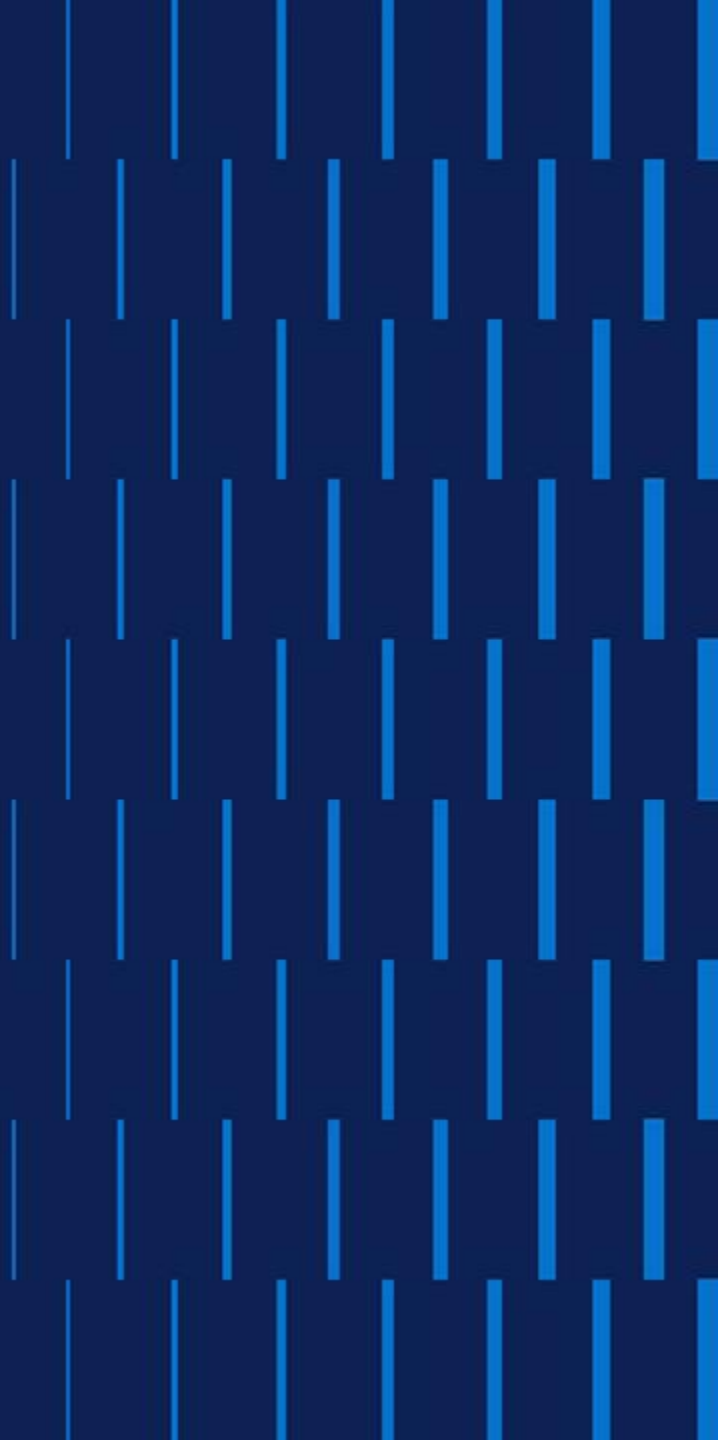

	UP2720Q	UP3221Q	UP3218K
Screen size	27" 16:9 IPS	32" 16:9 IPS - mini LED	32" 16:9 IPS
Resolution	UHD 4K 3840x2160 @ 60Hz	UHD 4K 3840x2160 @ 60Hz	UHD 8K 7860x4320 @ 60Hz
Colour Gamut	100% Adobe RGB 98% DCI-P3 80% BT 2020	99.8% DCI-P3 93% AdobeRGB 83% BT 2020	100% Adobe RGB 100% Rec709 98% DCI-P3
Number of colours	1.07B	1.07B	1.07B
Brightness	250 cd/m ² (typical)	SDR: 350 cd/m ² (typical) HDR: 1000 cd/m ² (typical)	400 cd/m ² (typical)
Connectivity	DP, 2x HDMI, TBT3 up/down Built-in colorimeter - CalMAN Ready	DP, 2x HDMI, TBT3 up/down Built-in colorimeter - CalMAN Powered	2x DP, USB (up)
USB Ports	4	2 SuperSpeed (10Gbps)	3
USB-C/RJ45	TBT3	TBT3	
Power Delivery	up to 90W	up to 90W	
Daisy Chain	Yes/Yes	Yes	No
KVM	No	No	No
PIP/PBP	Yes/Yes	Yes/Yes	No/No
Height adjustable	130mm	160mm	120mm
Speakers/soundbar	AE515M	No	No

Choosing the right UltraSharp Monitor 24-30"

Ambient Light
Sensor



New

Ambient Light
Sensor



New

Ambient Light
Sensor



New

Ambient Light
Sensor



New



	U2424H	U2424HE	U2724D	U2724DE	U2723QE
Screen size	24" 16:9 IPS	24" 16:9 IPS	27" 16:9 IPS Black	27" 16:9 IPS Black	27" 16:9 IPS Black
Resolution	FHD 1920x1080 @ up to 120Hz	FHD 1920x1080 @ up to 120Hz	QHD 2560x1440 @ up to 120Hz	QHD 2560x1440 @ up to 120Hz	UHD 4K 3840x2160 @ 60Hz
Colour Gamut	100% sRGB, 85% DCI-P3, 100% REC-709	100% sRGB, 85% DCI-P3, 100% REC-709	100% sRGB/REC 709, 98% DCI-P3/Display P3	100% sRGB/REC 709, 98% DCI-P3/Display P3	100% sRGB, 98% DCI-P3, 100% REC-709
Number of colours	16.7m	16.7m	1.07Bn	1.07Bn	1.07Bn
ComfortView Plus	Yes (TUV Cat 2)	Yes (TUV Cat 2)	Yes (TUV Cat 2)	Yes (TUV Cat 2)	Yes (TUV Cat 3)
Brightness	250 cd/m ² (typical)	250 cd/m ² (typical)	350 cd/m ² (typical)	350 cd/m ² (typical)	400 cd/m ² (typical)
Connectivity	DP, HDMI, DP Out, USB-C (up), Audio line-out	DP, HDMI, DP Out, USB-C, USB-C (up), RJ45, Audio line-out	DP, HDMI, DP Out, USB-C (up), Audio line-out	DP, DP out, HDMI, TBT4 , TBT out, USB-C (up), RJ45, Audio line-out	DP, HDMI, DP Out, USB-C, USB-C (up), RJ45, Audio line-out
USB Ports	4 (1 USB C 15W)	5 (1 USB C 15W)	4 (1 USB C 15W)	5 (1 USB C 15W)	6 (1 USB C 15W)
USB-C/RJ45		USB-C/RJ45 (2.5 GbE)		TBT4 /RJ45 (2.5 GbE)	USB-C/RJ45
Power Delivery		up to 90W		up to 90W	up to 90W
Daisy Chain	Yes	Yes	Yes	Yes	Yes
KVM / Auto KVM (switch)	No	Yes / Yes	No	Yes / Yes	Yes / Yes
PIP/PBP	No/No	No/No	Yes/Yes	Yes/Yes	Yes/Yes
Height adjustable	150mm	150mm	150mm	150mm	150mm
Speakers/soundbar	SB521A/SB521A	SB521A/SB521A	SB521A/SB521A	SB521A/SB521A	SB521A/SB521A

Choosing the right UltraSharp Monitor 32"-49" & Curved

		 4K Webcam	 4K Webcam	 Ambient Light Sensor Ultrawide Curved	 Ultrawide Curved	 Ambient Light Sensor Ultrawide Curved	 Ultrawide Curved	 Ultrawide Curved
		EOL from Oct CY24						
	U3223QE	U3223QZ	U3224KBA	U3425WE	U3824DW	U4025QW	U4323QE	U4924DW
Screen size	32" 16:9 IPS Black	32" 16:9 IPS Black	32" 16:9 IPS Black	34" 21:9 IPS Black	38" 21:9 IPS Black	40" 21:9 IPS Black	43" 16:9 IPS	49" 32:9 IPS Black
Resolution	UHD 4K 3840x2160 @ 60Hz	UHD 4K 3840x2160 @ 60Hz	6K 6144x3456 @ 60Hz	WQHD 3440x1440 @ up to 120Hz	WQHD 3840x1600 @ 60Hz	WUHD 5120x2160 @ up to 120Hz	UHD 4K 3840x2160 @ 60Hz	Dual QHD 5120x1440 @ 60Hz
Colour Gamut	100% sRGB, 100% Rec 709, 98% DCI-P3	100% sRGB, 100% Rec 709, 98% DCI-P3	100% sRGB, 100% Rec 709, 99% DCI-P3 / Display-P3	100% sRGB, 100% Rec 709, 98% DCI-P3 / Display-P3	100% sRGB, 100% Rec 709, 98% DCI-P3 / Display-P3	100% sRGB, 100% Rec 709, 99% DCI-P3 / Display-P3	95% SRGB	100% sRGB, 100% Rec 709, 98% DCI-P3 / Display-P3
Number of colours	1.07Bn	1.07Bn	1.07Bn	1.07Bn	1.07Bn	1.07Bn	1.07Bn	1.07Bn
ComfortView Plus	Yes (TUV Cat 3)	Yes (TUV Cat 3)	Yes	Yes (TUV Cat 2)	Yes (TUV Cat 3)	Yes (TUV Cat 2)	Yes (TUV Cat 3)	Yes (TUV Cat 3)
Brightness	400 cd/m ² (typical)	400 cd/m ² (typical)	450 cd/m ² (typical)	300 cd/m ² (typical)	300 cd/m ² (typical)	450 cd/m ² (typical) VESA Display HDR 600 cd/m ² (peak)	350 cd/m ² (typical)	350 cd/m ² (typical)
Connectivity	DP, HDMI, DP Out, USB-C, USB-C (up), RJ45, Audio line-out	DP, HDMI, DP Out, USB-C, USB-C (up), RJ45, Audio line-out	HDMI, Mini DP, TBT4 , TBT4 out, USB-C (up), RJ45	DP, HDMI, TBT4 , TBT4 out, USB-C (up), RJ45, Audio line-out, USB (Up)	DP, 2x HDMI, USB-C, USB-C (up), RJ45, Audio line-out	DP, HDMI, TBT4 , TBT4 out, USB-C (up), RJ45, Audio line-out, USB (Up)	2x DP, 2x HDMI, USB-C, 3x USB-C (up), RJ45, Audio line out	DP, 2x HDMI, USB-C, USB-C (up), RJ-45, Audio line-out
USB Ports	6 (1 USB C 15W)	6 (1 USB C 15W)	7 (2 USB C 15W)	7 (2 USB C 15W)	7 (2 USB C 15W)	7 (2 USB C 15W)	5 (1 USB C)	7 (2 USB-C 15W)
USB-C/RJ45	USB-C/RJ45	USB-C/RJ45	TBT4 /RJ45	TBT4 /RJ45	USB-C/RJ45	TBT4 /RJ45	USB-C/RJ45	USB-C/RJ45
Power Delivery	up to 90W	up to 90W	up to 140W	up to 90W	up to 90W	up to 140W	up to 90W	up to 90W
Daisy Chain	Yes	Yes	Yes	Yes + Internal via iMST	No	Yes + Internal via iMST	Internal via iMST	Internal via iMST
KVM / Auto KVM (switch)	Yes / Yes	Yes / Yes	Yes / Yes	Yes / Yes	Yes / Yes	Yes / Yes	Yes / Yes	Yes / Yes
PIP/PBP	Yes/Yes	Yes/Yes	Yes/Yes	Yes/Yes	Yes/Yes	Yes/Yes	Yes/Yes	Yes/Yes
Height adjustable	150mm	150mm	160mm	150mm	120mm	150mm	60mm	120mm
Speakers/soundbar	SB521A/SB521A	2x 14W	2x 14W	2x 5W	2x 9W	2x 9W	2x 8W	2x 9W

Choosing the right P Series Monitor to 24"

No Stand Option

Replacing U2421E



	P1424H	P1917S	P2225H	P2425H/HE	P2425	P2425E	P2423D/DE	P2424HT
Design		Standard Bezel	4-Sided Ultrathin	4-Sided Ultrathin	4-Sided Ultrathin	4-Sided Ultrathin	3-Sided Ultrathin	3-Sided Ultrathin
Screen size	14" 16:9 IPS	19" 5:4 IPS	22" 16:9 IPS	24" 16:9 IPS	24" 16:10 IPS	24" 16:10 IPS	24" 16:9 IPS	24" 16:9 IPS
Resolution	FHD 1920x1080 @ 60Hz	1280x1024 @ 60Hz	FHD 1920x1080 @ 100Hz	FHD 1920x1080 @ 100Hz	WUXGA 1920x1200 @ 100Hz	WUXGA 1920x1200 @ 100Hz	QHD 2560x1440 @ 60Hz	FHD 1920x1080 @ 60Hz
Colour Gamut	72% NTSC (CIE 1931)	84% (CIE 1976) 72% (CIE 1931)	99% sRGB	99% sRGB	99% sRGB	99% sRGB	99% sRGB	99% sRGB
Number of colours	16.7m	16.7m	16.7m	16.7m	16.7m	16.7m	16.7m	16.7m
ComfortView Plus			Yes (TUV Cat 2)	Yes (TUV Cat 2)	Yes (TUV Cat 2)	Yes (TUV Cat 2)	Yes (TUV Cat 3)	Yes (TUV Cat 3)
Brightness	300 cd/m ² (typical)	250 cd/m ² (typical)	250 cd/m ² (typical)	250 cd/m ² (typical)	300 cd/m ² (typical)	300 cd/m ² (typical)	300 cd/m ² (typical)	250 cd/m ² (typical)
Connectivity	2x USB-C	DP, HDMI, VGA	DP, HDMI, VGA, USB (up)	DP, HDMI, DP Out* VGA**, USB-C*, RJ45* USB (up)**	DP, HDMI, VGA, USB (up)	DP, HDMI, DP out, USB-C, RJ45	DP, HDMI, DP Out* VGA**, USB-C*, RJ45* USB (up)**	DP, HDMI, USB-C, RJ45
USB Ports			4 (1 USB C 15W)	4 (1 USB C 15W)	4 (1 USB C 15W)	4 (1 USB C 15W)	4	4 (1x USB-C)
USB-C/RJ45	USB-C			HE: USB-C*/RJ45*		USB-C*/RJ45*	DE: USB-C*/RJ45*	USB-C*/RJ45*
USB-C Power Delivery	Pass through to 65W			to 90W		to 90W		to 90W
Daisy Chain	No	No	No	No/Yes	No	Yes	No/Yes	No
KVM	No	No	No	No	No	No	No	No
PIP/PBP	No	No	No	No	No	No	No	No
Height adjustable	Tilt (10° to 90°)	130mm	150mm	150mm	150mm	150mm	150mm	110mm
Speakers/soundbar	NA	AC511M/AE515M	SB521A/SB522A	SB521A/SB522A	SB521A/SB522A	SB521A/SB522A	SB521A/SB522A	1x 3w

* DP Out & USB-C HC/HE/DE model only

** VGA H model only

DELLTechnologies

Choosing the right P Series Monitor 27-34"



	P2725H/HE	P2723D/DE	P2723QE	P3223DE	P3223QE	P3424WE
Design	4-Sided Ultrathin	3-Sided Ultrathin	3-Sided Ultrathin	3-Sided Ultrathin	3-Sided Ultrathin	3-Sided Ultrathin
Screen size	27" 16:9 IPS	27" 16:9 IPS	27" 16:9 IPS	32" 16:9 IPS	32" 16:9 IPS	34" 21:9 IPS
Resolution	FHD 1920x1080 @ 100Hz	QHD 2560x1440 @ 60Hz	UHD 4K 3840x2160 @ 60Hz	QHD 2560x1440 @ 60Hz	UHD 4K 3840x2160 @ 60Hz	WQHD 3440x1440 @ 60Hz
Colour Gamut	99% sRGB	99% sRGB	99% sRGB	99% sRGB	99% sRGB	99% sRGB
Number of colours	16.7m	16.7m	1.07Bn	1.07Bn	1.07Bn	1.07Bn
ComfortView Plus	Yes (TUV Cat 2)	Yes (TUV Cat 3)	Yes (TUV Cat 3)	Yes (TUV Cat 3)	Yes (TUV Cat 3)	Yes (TUV Cat 3)
Brightness	250 cd/m ² (typical)	350 cd/m ² (typical)	350 cd/m ² (typical)	350 cd/m ² (typical)	350 cdm/m ² (typical)	300 cd/m ² (typical)
Connectivity	DP, HDMI, DP Out* VGA**, USB-C*, RJ45* USB (up)**	DP, HDMI, DP Out* VGA**, USB-C*, RJ45* USB (up)**	DP, HDMI, USB-C, RJ45	DP, DP Out, HDMI, USB-C, RJ45	DP, HDMI, USB-C, RJ45	DP, HDMI, USB-C, USB (up), RJ-45
USB Ports	4 (1 USB C 15W)	4	4	4	4	4
USB-C/RJ45	HE: USB-C*/RJ45*	DE: USB-C*/RJ45*	USB-C/RJ45	USB-C/RJ45	USB-C/RJ45	USB-C/RJ45
Power Delivery	to 90W	to 90W	to 90W	to 90W	to 90W	to 90W
Daisy Chain	No/Yes	No/Yes	No	No	No	No
KVM	No	No	No	No	No	Yes
PIP/PBP	No	No	No	No	No	Yes
Height adjustable	150mm	150mm	150mm	150mm	150mm	150mm
Speakers/soundbar	SB521A/SB522A	SB521A/SB522A	SB521A/SB522A	SB521A/SB522A	SB521A	SB521A/SB522A


* DP Out & USB-C HE/DE model only

** VGA H/D model only

Choosing the right Dell E Series Monitor 24-27"

				Estimated EOL - Nov 2024		Estimated EOL - Oct 2024		Estimated EOL - Nov 2024			
											
	E1715S	E2020H	E2223HN	E2222H	E2225H	E2222HS	E2225HS	E2423HN	E2425H	E2425HS	E2725H
Screen size	17" 5:4 TN	20" 16:9 TN	22" 16:9 VA	22" 16:9 VA	22" 16:9 VA	22" 16:9 VA	24" 16:9 VA				
Resolution	1280x1024 @ 60Hz	1600x900 @ 60Hz	FHD 1920x1080 @ 60Hz	FHD 1920x1080 @ 60Hz	FHD 1920x1080 up to 75 Hz	FHD 1920x1080 @ 60Hz	FHD 1920x1080 up to 75 Hz	FHD 1920x1080 @ 60Hz	FHD 1920x1080 up to 75 Hz	FHD 1920x1080 up to 75 Hz	FHD 1920x1080 up to 75 Hz
Colour Gamut	85% (CIE 1976) / 72% (CIE 1931)	83% (CIE1976) 72% (CIE1931)	83% (CIE1976) 72% (CIE1931)	83% (CIE1976) 72% (CIE1931)	NTSC 72% (CIE 1931), NTSC 83% (CIE 1976)	83% (CIE1976) 72% (CIE1931)	NTSC 72% (CIE 1931), NTSC 83% (CIE 1976)	83% (CIE1976) 72% (CIE1931)	83% (CIE1976) 72% (CIE1931)	83% (CIE1976) 72% (CIE1931)	83% (CIE1976) 72% (CIE1931)
Number of colours	16.7m	16.7m	16.7m	16.7m	16.7m	16.7m	16.7m	16.7m	16.7m	16.7m	16.7m
ComfortView Plus	No	No	No	No	Yes (TUV Cat 3)	No	Yes (TUV Cat 3)	No	Yes (TUV Cat 3)	Yes (TUV Cat 3)	Yes (TUV Cat 3)
Brightness	250 cd/m² (typical)	250 cd/m² (typical)	250 cd/m² (typical)	250 cd/m² (typical)	250 cd/m² (typical)	250 cd/m² (typical)	250 cd/m² (typical)	250 cd/m² (typical)	250 cd/m² (typical)	250 cd/m² (typical)	300 cd/m² (typical)
Connectivity	DP, VGA	DP, VGA	HDMI, VGA	DP, VGA	DP, VGA	DP, VGA, HDMI	DP, VGA, HDMI	HDMI, VGA	DP, VGA	DP, VGA, HDMI	DP, VGA
USB Ports	No	No	No	No	No	No	No	No	No	No	No
Daisy Chain	No	No	No	No	No	No	No	No	No	No	No
Height adjustable						100mm					
Speakers/soundbar	NA	AC511M/ AE515M	No	No	No	2x1W	2x1W	No	No	2x1W	No

Choosing the right Dell Collaboration Monitor

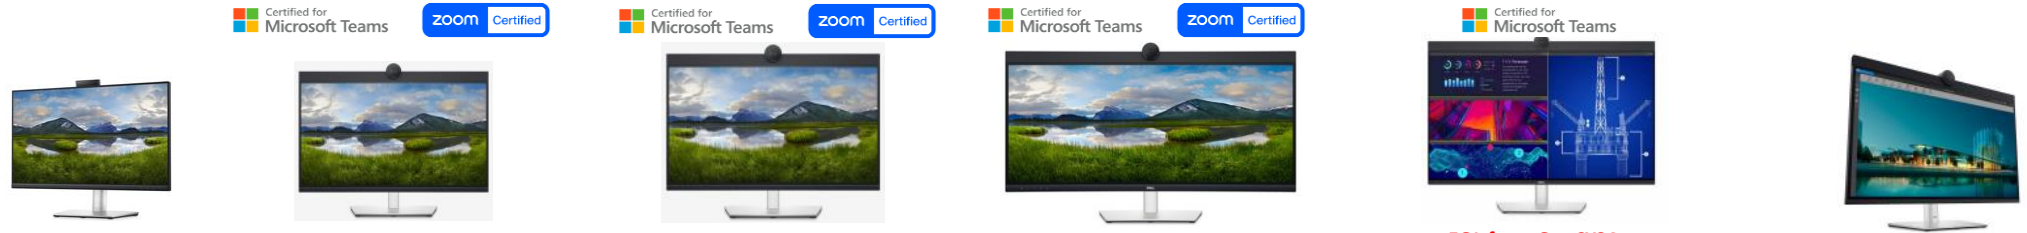

	C2423H	P2424HEB	P2724DEB	P3424WEB	U3223QZ	U3224KBA
Screen size	24" 16:9 IPS	24" 16:9 IPS	27" 16:9 IPS	34" 21:9 IPS	32" 16:9 IPS Black	32" 16:9 IPS Black
Resolution	FHD 1920x1080 @ 60Hz	FHD 1920x1080 @ 60Hz	QHD 2560x1440 @ 60Hz	WQHD 3440x1440 @ 60Hz	UHD 4K 3840x2160 @ 60Hz	UHD 6K 6144 X 3456 @ 60Hz
Colour Gamut	99% sRGB	99% sRGB	99% sRGB	99% sRGB	100% sRGB, 100% Rec 709, 98% DCI-P3	100% sRGB, 100% Rec 709, 99% DCI-P3 and Display-P3
Number of colours	16.7m	16.7m	16.7m	1.07Bn	1.07Bn	1.07Bn
ComfortView Plus	Yes (TUV Cat 3)	Yes (TUV Cat 3)	Yes (TUV Cat 3)	Yes (TUV Cat 3)	Yes (TUV Cat 3)	Yes (TUV Cat 3)
Brightness	250 cd/m² (typical)	250 cd/m² (typical)	350 cd/m² (typical)	300 cd/m² (typical)	400 cd/m² (typical)	450 cd/m² (typical)
Connectivity	DP, HDMI, DP Out, Audio line-out, Audio out, USB (Up)	DP, HDMI, DP out, USB-C, RJ45, Headphone jack, USB (Up)	DP, HDMI, DP out, USB-C, RJ45, Headphone jack, USB (Up)	DP, HDMI, USB-C, RJ45, Headphone jack, USB (Up)	DP, HDMI, DP Out, USB-C, USB-C (up), Headphone/microphone combo jack	HDMI, Mini DP, TBT4 , TBT out, RJ45, USB-C (Up)
USB Ports	4	4 (1 USB C 15W)	4 (1 USB C 15W)	4 (1 USB C 15W)	6 (1 USB C 15W)	7 (2 USB C 15W)
USB-C/RJ45		USB-C/RJ45	USB-C/RJ45	USB-C/RJ45	USB-C/RJ45	TBT4 /RJ45
Power Delivery		to 90W	to 90W	to 90W	to 90W	to 140W
Daisy Chain	Yes	Yes	Yes	No	Yes	Yes
KVM / Auto KVM (switch)	No	No / Yes	No / Yes	Yes / Yes	Yes	Yes
PIP/PBP	No	No	No	Yes/Yes	Yes/Yes	Yes/Yes
Height adjustable	150mm	150mm	150mm	150mm	150mm	160mm
Camera	5MP IR	4MP 2K QHD Sony STARVIS™ sensor, Auto focus, Auto framing, Digital zoom, HDR	4MP 2K QHD Sony STARVIS™ sensor, Auto focus, Auto framing, Digital zoom, HDR	4MP 2K QHD Sony STARVIS™ sensor, Auto focus, Auto framing, Digital zoom, HDR	4K HDR Sony STARVIS™ CMOS sensor and multi-element lens, Auto focus, Auto framing, Digital zoom, HDR	4K HDR Sony STARVIS™ CMOS sensor and multi-element lens, Auto focus, Auto framing, Digital zoom, HDR with image sensor(2.0um)
Windows Hello		Yes + Express Sign-in	Yes + Express Sign-in	Yes + Express Sign-in	Yes + Express Sign-in	Yes + Express Sign-in
Speakers/soundbar	2x 5W	2x 5W	2x 5W	2x 5W	2x 14W	2x 14W

Choosing the right monitor arm, stand or mount



	Arms & Stands			AIO Stands		
Model	Dell Single Arm – MSA20	Dell Dual Arm – MDA20	Dell Dual Stand – MDS19	Dell Dell AIO SFF – OSS21	DELL AIO MFF – MFS18	DELL AIO MFF –MFS22/CFS22
Supportability	19" - 38"	19"- 27"	17"- 27"	19"- 27"	19"- 27"	19"- 27"
Compatibility	Dell UltraSharp, P, E and C Series Monitors (exl. P2418HT, UP3221Q)	Dell UltraSharp, P, E and C Series Monitors (exl. P2418HT)	Dell UltraSharp, P, E and C Series Monitors (exl. P2314T, P2418HT, UP2718Q, UP2720Q)	Dell UltraSharp, P, E and C Series Monitors (exl. P2314T, P2418HT, UP2715K, UP2718Q, UP2720Q)	Dell UltraSharp, P, E and C Series Monitors (exl. P2314T, P2418HT, UP2715K, UP2718Q, UP2720Q)	Dell UltraSharp, P, E and C Series Monitors (exl. P2314T, P2418HT, UP2715K, UP2718Q, UP2720Q)
Need VESA mounting plate	E Series Monitors	E Series Monitors	E Series Monitors	E Series Monitors	E Series Monitors	E Series Monitors
Supported via Quick Release	Dell UltraSharp, P Series and C Series Monitors	Dell UltraSharp, P Series and C Series Monitors	Dell UltraSharp, P Series and C Series Monitors	Dell UltraSharp, P Series and C Series Monitors	Dell UltraSharp, P Series and C Series Monitors	Dell UltraSharp, P Series and C Series Monitors

The Dell Commercial Large Format Monitors Portfolio



	P5524Q	P5524QT	P6524QT	P7524QT	P8624QT
Resolution	4K	4K	4K	4K	4K
OptiPlex Micro Mounting via:	Optional bracket	PC slot	PC slot	PC slot	PC slot
Touch/Non-Touch	Non-touch	20 points of touch	20 points of touch	20 points of touch	20 points of touch
Image size	54.6 in	54.6 in	64.52	74.5 in	85.6 in
Duty Cycle	12/7	12/7	12/7	12/7	12/7
Panel Type	Vertical Alignment Glass	IPS Glass	IPS Glass	IPS Glass	IPS Glass
Surface	Anti-glare	Anti-glare, Anti-smudge	Anti-glare, Anti-smudge	Anti-glare, Anti-smudge	Anti-glare, Anti-smudge
Connectivity	2x HDMI	3x HDMI	3x HDMI	3x HDMI	4x HDMI
	1x DisplayPort	1x USB Type-C	1x USB Type-C	1x DisplayPort	1x UBC Type-C
	1x VGA	1x DisplayPort	1x DisplayPort	1x VGA	1x DisplayPort
	4x USB	7x USB	7x USB	7x USB	7x USB
	1x Audio-In/-Out	1x Audio-Out	1x Audio-Out	1x Audio-In/-Out	1x Audio-Out
	1x RS232	1x RS232	1x RS232	1x RS232	1x RS232
	1x RJ45	1x RJ-45	1x RJ-45	1x RJ45	1x RJ-45
Mount	Optional wall mount	Optional wall mount	Optional wall mount	Optional wall mount	Optional wall mount

