



**RHYTHM**



**RHYTHM**  
— *Stone look* —





**612GL07R**  
600x1200mm



**AVAILABLE SIZES**  
600x1200mm  
600x600mm  
400x600x20mm

**GL01**  
**WHITE**



**AVAILABLE SIZES**  
600x1200mm  
600x600mm  
400x600x20mm

**GL02**  
**DESERT**



**AVAILABLE SIZES**  
600x1200mm  
600x600mm

**GL07**  
**SILVER**



**AVAILABLE SIZES**  
600x1200mm  
600x600mm

**GL09**  
**COKE**





**GL01**  
**WHITE**



**612GL01R**  
600×1200mm





**60GL01R**

600×600mm








ACCESSORIES



**Paver**  
400x600mm  
20mm Thickness



**Bullnose-Round Edge**  
400x600mm  
20mm Thickness

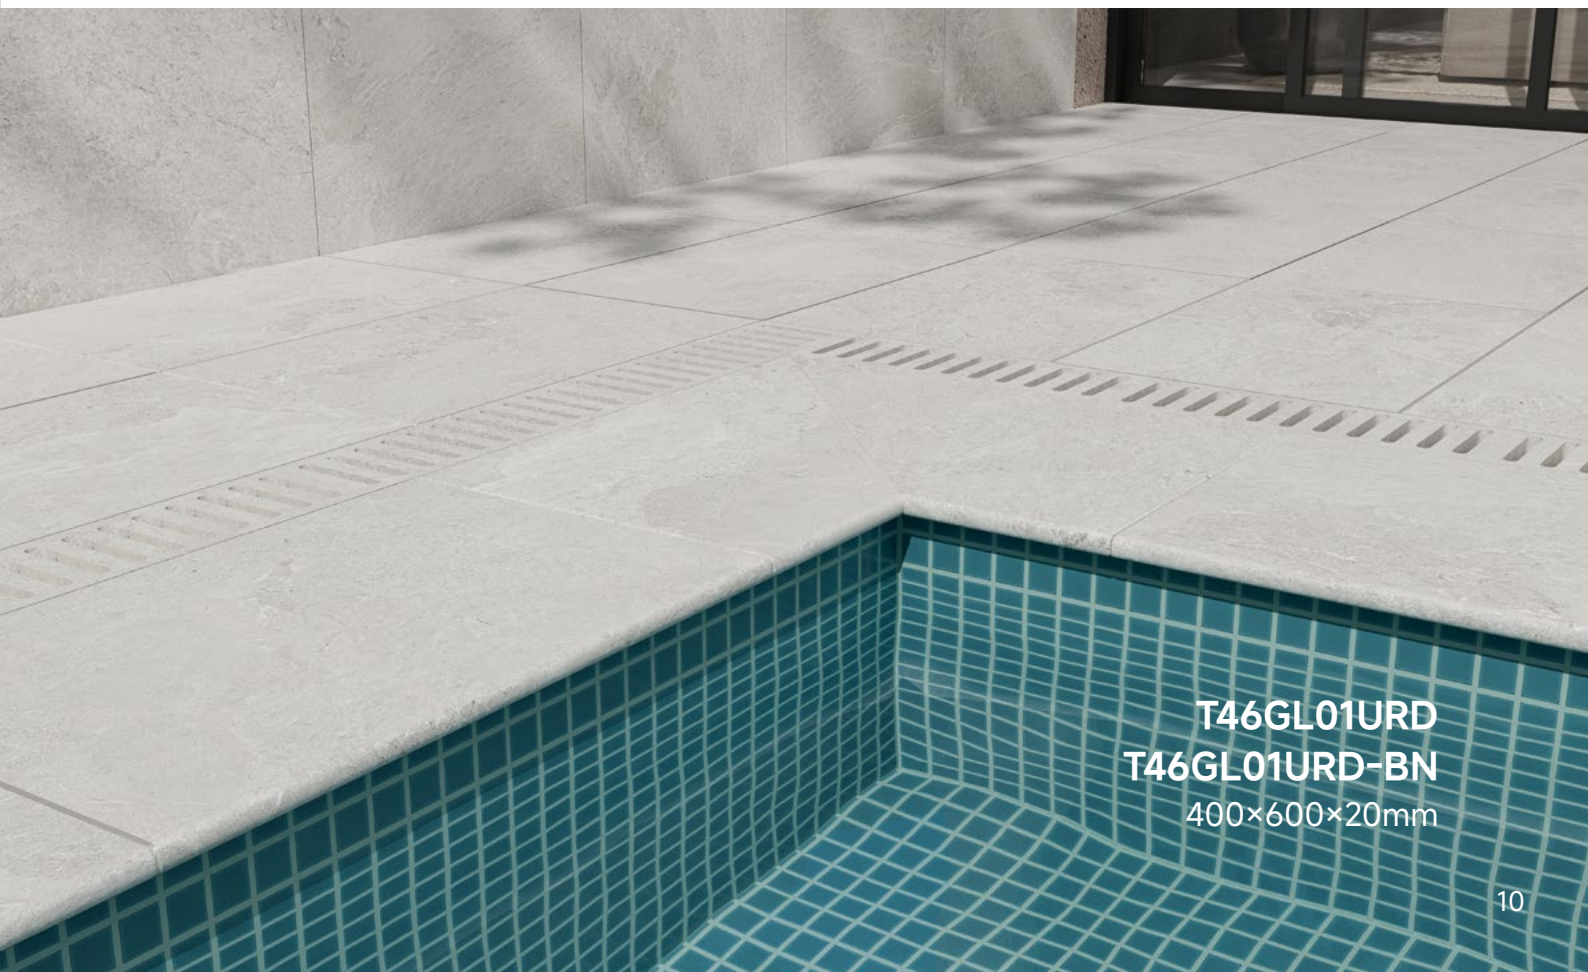

**T46GL01URD**  
**T46GL01URD-BN**  
400x600x20mm



ACCESSORIES

FEATURE TILE



**36GL01R-MXG**  
300x600mm



**36GL01R-MXG**  
300x600mm





**GL02**  
**DESERT**



**60GL02R**  
600×600mm





**60GL02R**  
600×600mm





**612GL02R**  
600×1200mm



ACCESSORIES



**Paver**  
400x600mm  
20mm Thickness



**Bullnose-Round Edge**  
400x600mm  
20mm Thickness



**T46GL02RUD**  
**T46GL02URD-BN**  
400x600x20mm



ACCESSORIES

FEATURE TILE



**36GL02R-MXG**  
300x600mm



**36GL02R-MXG**  
300×600mm






GL07  
SILVER



60GL07R  
600×600mm



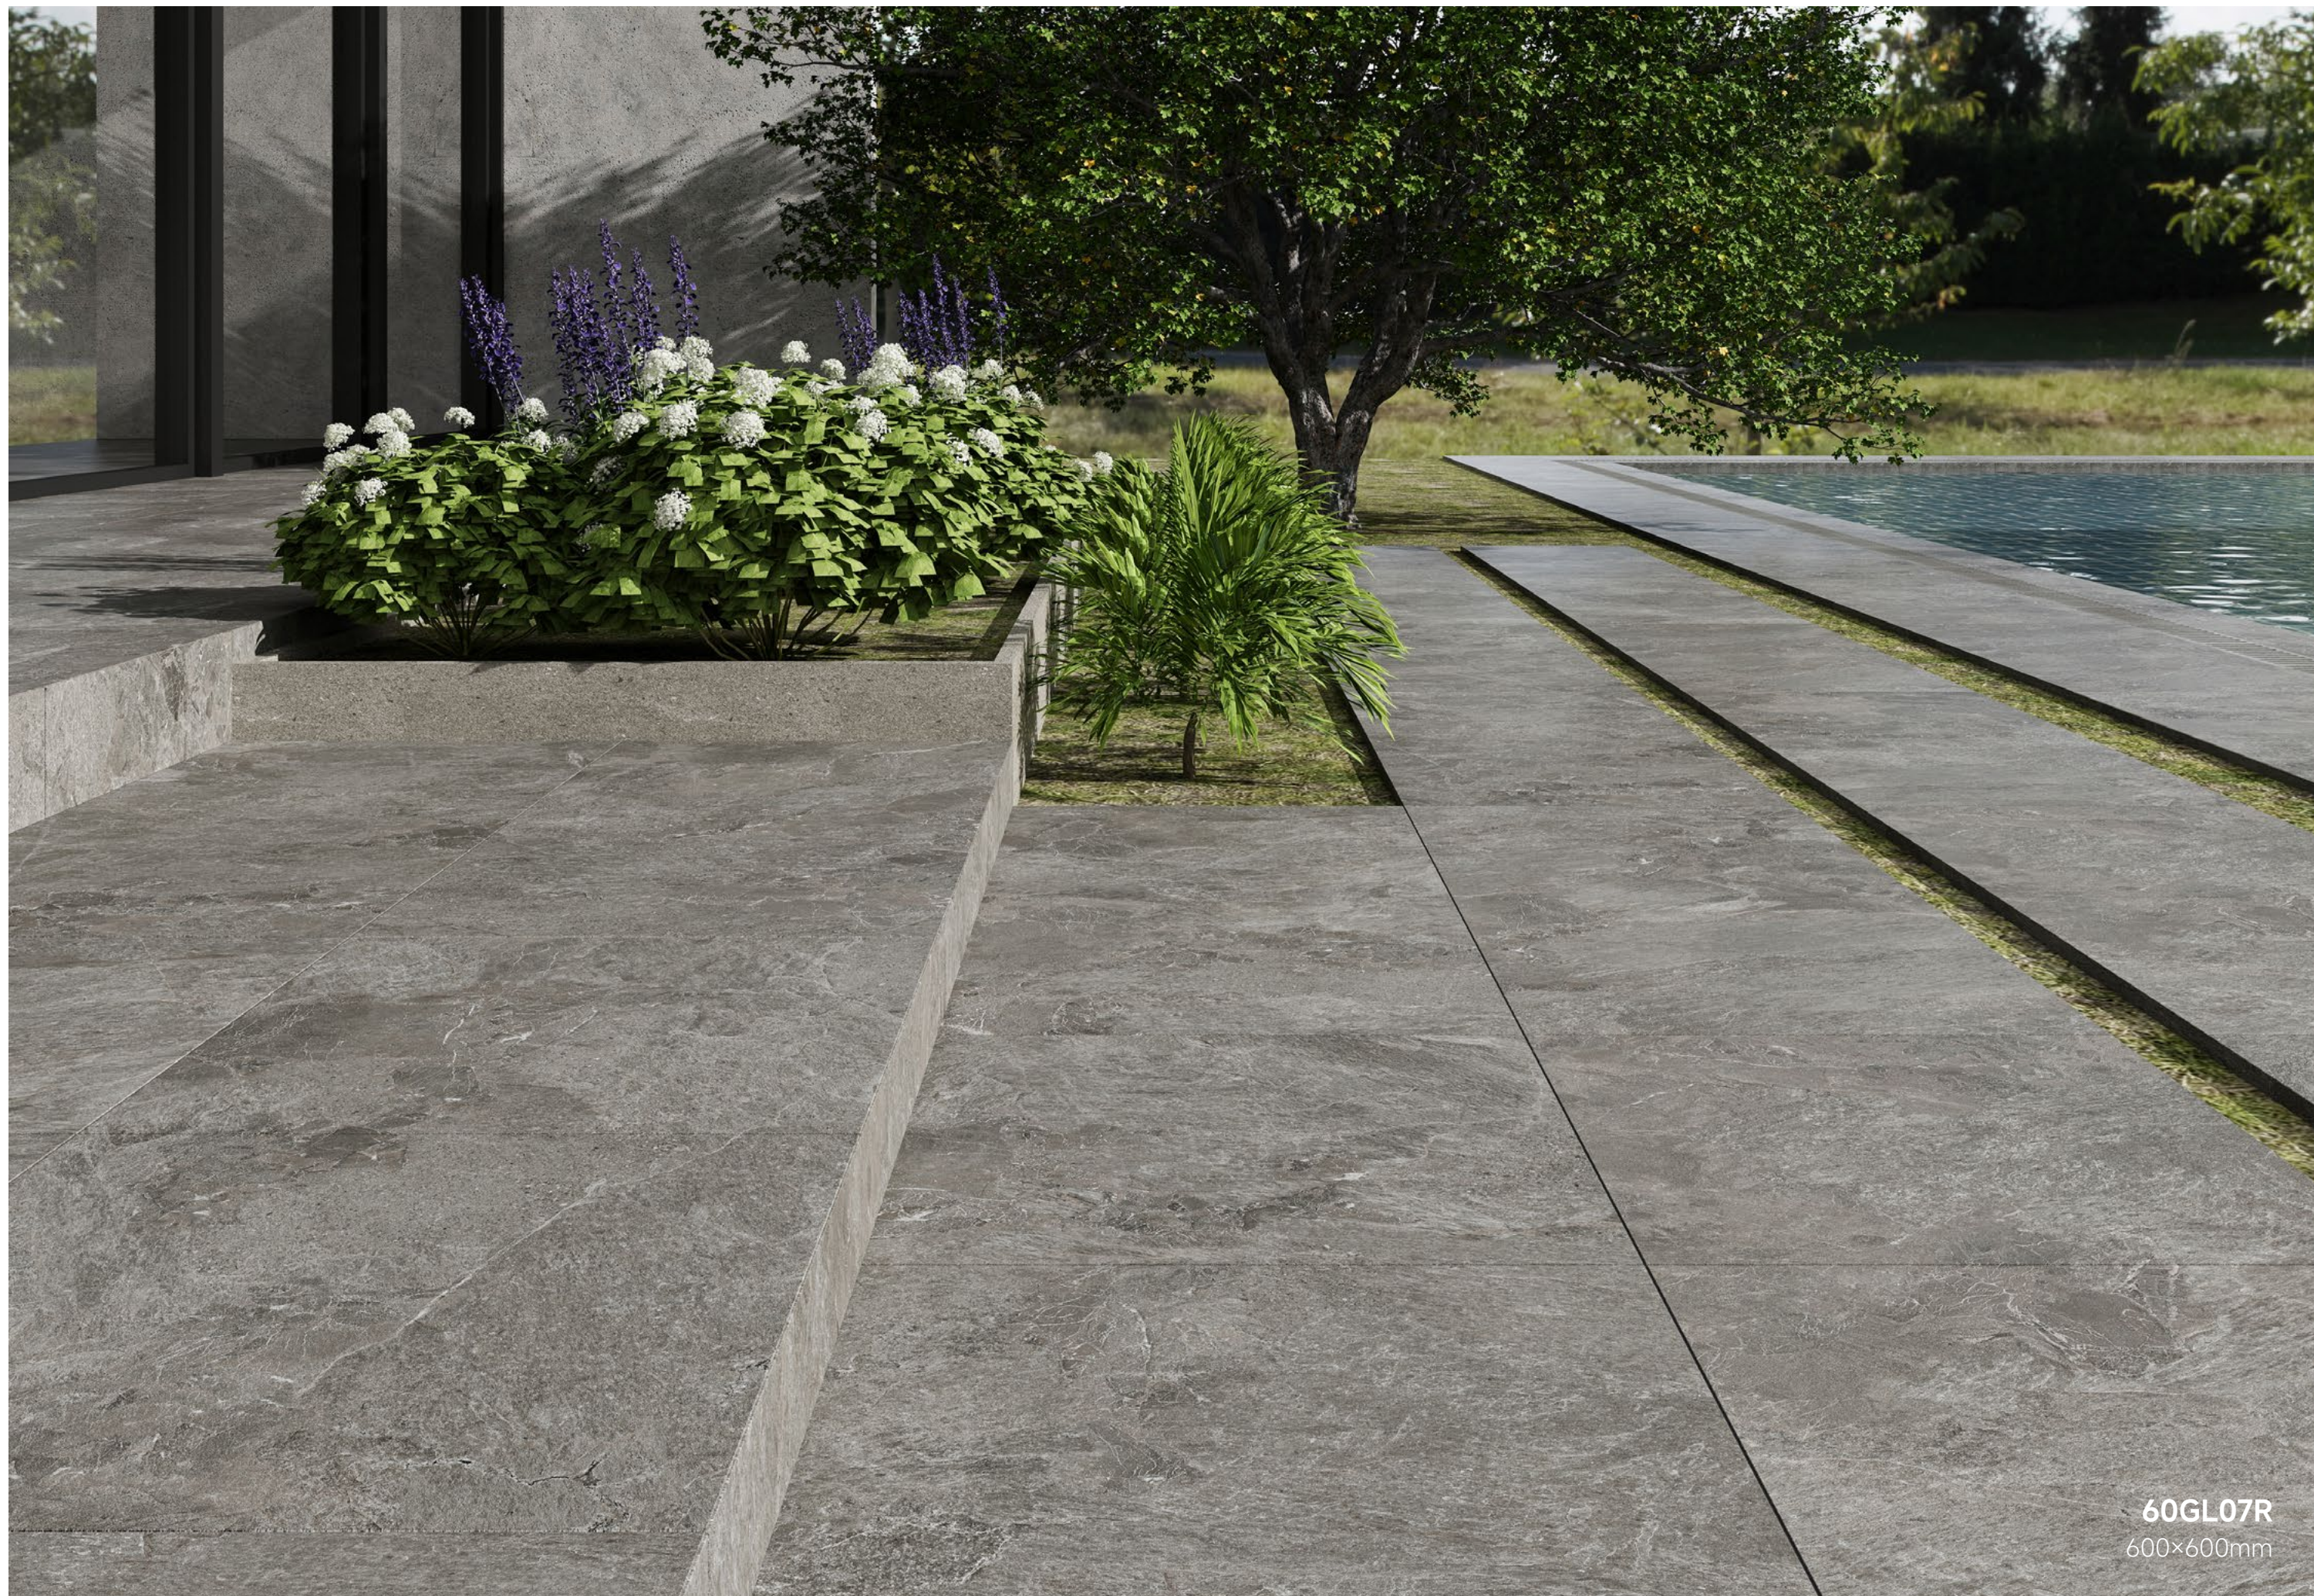

**60GL07R**  
600×600mm





**612GL07R**  
600×1200mm





GL09  
COKE



60GL09R  
600×600mm





**60GL09R**  
600×600mm





**612GL09R**  
600×1200mm



DESIGN FACES

Please note: Tile patterns are random and may not represent exactly as shown in the photo.



GL01 | 600×1200mm 18 FACES



GL01 | 600×600mm 36 FACES



GL01  
WHITE



GL02  
DESERT



GL07  
SILVER




GL09  
COKE


SURFACE / APPLICATION / PRODUCT SUMMARY

M MATT E EXTERNAL H WALL TILES F FLOOR TILES

MIN. LAYING GAP 3mm 04 COLOURS 04 SIZES 02 FINISHES



600×1200mm



600×600mm



600×300mm



300×300mm

|          |    |   |   |   |   |
|----------|----|---|---|---|---|
| MATT     | P3 | ✓ | ✓ | ✓ | ✓ |
| EXTERNAL | P4 |   | ✓ |   |   |

Available colors: GL01



GL02



400×600×20mm  
Paver



400×600×20mm  
Bullnose



300×600mm  
Feature tile



TECHNICAL SPECIFICATION

| TECHNICAL FEATURES             | STANDARD<br>PRESCRIBED VALUES                     | MANUFACTURER'S<br>VALUES<br>(600×600mm) | MANUFACTURER'S<br>VALUES<br>(600×1200mm) |
|--------------------------------|---------------------------------------------------|-----------------------------------------|------------------------------------------|
| <b>TECHNICAL SPECIFICATION</b> |                                                   |                                         |                                          |
| Length and width               | ±0.6% max .                                       | -0.03-0.03% max .                       | -0.03-0.03% max .                        |
| Thickness                      | ±5% max .                                         | 9.0-9.5% max .                          | 10.0-10.5% max .                         |
| Orthogonnality                 | ±0.5% max .                                       | -0.06-0.07% max .                       | -0.06-0.07% max .                        |
| Straightness of sides          | ±0.5% max .                                       | -0.06-0.07% max .                       | -0.02-0.03% max .                        |
| Surfaces flatness              | ±0.5% max .                                       | -0.05-0.07% max .                       | -0.09-0.11% max .                        |
| V rating                       | V3                                                | V3                                      | V3                                       |
| <b>PHYSICAL PROPRETIES</b>     |                                                   |                                         |                                          |
| Water absorption               | ≤ 0.5%                                            | ≤ 0.5%                                  | ≤ 0.5%                                   |
| Breaking strength              | ≥1300N                                            | 2265N                                   | 4031N                                    |
| Bending resistance             | ≥35N/mm²                                          | 38N/mm²                                 | 40N/mm²                                  |
| Resistance to deep abrasion    | ≤175mm³                                           | Class 4                                 | Class 4                                  |
| Temperature shock resistance   | No visible crack                                  | No visible crack                        | Durable                                  |
| Resistance to frost            | No visible crack                                  | No visible crack                        | No visible crack                         |
| Non-slip                       | P3-P4                                             | P3-P4                                   | P3-P4                                    |
| Colour resistance to light     | no colour changes                                 | no colour changes                       | no colour changes                        |
| <b>CHEMICAL PROPERTIES</b>     |                                                   |                                         |                                          |
| Chemical resistance            | no visible changes<br>when subjected to chemicals | Durable                                 | Durable                                  |
| Resistance to staining         | ≥ 3                                               | Class 5                                 | Class 5                                  |

SURFACE / APPLICATION / PRODUCT SUMMARY

|                |                       |           |            |
|----------------|-----------------------|-----------|------------|
| TEXTURE RATING | MIN.LAYING<br>GAP 3mm | RECTIFIED | WALL TILES |
| FLOOR TILES    | COLOURS               | SURFACES  |            |

V RATING

|    |    |      |    |                                                                                                   |
|----|----|------|----|---------------------------------------------------------------------------------------------------|
|    |    |      |    |                                                                                                   |
| V1 | V2 | ✓ V3 | V4 | V1=Uniform Appearance<br>V2=Slight Variation<br>V3=Moderate Variation<br>V4=Substantial Variation |

PACKING DETAILS

| SIZE                     | SURFACE |             | PCS/CTN | m²/CTN | KG/CTN |
|--------------------------|---------|-------------|---------|--------|--------|
|                          | MATT P3 | EXTERNAL P4 |         |        |        |
| 600x1200mm               | ✓       |             | 2       | 1.44   | 32     |
| 600x600mm                | ✓       | ✓           | 4       | 1.44   | 32     |
| 600x300mm                | ✓       |             | 8       | 1.44   | 32     |
| 300x300mm                | ✓       |             | 11      | 0.99   | 21     |
| 400×600×20mm<br>PAVER    |         | ✓           | 3       | 0.72   | 32.5   |
| 400×600×20mm<br>BULLNOSE |         | ✓           | 2       | 0.48   | 20.4   |