

# MasterRoc<sup>®</sup> MP 326

**Solvent-free, low viscosity, high strength, hydrophilic grout for rock injection, ground improvement, and the consolidation of sand and silt strata**

## Description

MasterRoc MP 326 is a single-component mineral injection grout based on advanced nanometric colloidal silica technology. The product is solvent-free, non-toxic, and does not foam. With adjustable gel times, superior adhesion to various surfaces, and the capability of developing higher compressive strength, MasterRoc MP 326 is an economical and environmentally friendly alternative to traditional grouting materials such as acrylics, sodium silicate, microfine cement, polyurethane, polyurea silicate, etc.

## Applications

- Consolidation of sand- and silt-based strata
- Injection into fine joints and fissures in rock
- Slope stabilization and soil stabilization
- Ground improvement
- Liquefaction mitigation
- Pre-injection grouting in tunnel constructions
- Waterproofing of existing tunnels
- Water ingress control and wall stabilization in mining applications
- Seepage control
- Underground infrastructure protection

## Features

- Very low viscosity
- Excellent bonding to wet surfaces
- Adjustable and controlled gel times with an accelerator
- Wide range of workable temperatures from 40 °F to 105 °F (5 °C to 40 °C)
- Suitable for use with both one- and two-component pumps

## Benefits

- Excellent penetration
- Minimal ground disturbance
- Long-term strength development
- Enhanced efficiency in grouting applications
- Non-aggressive and environmentally preferable

## Chemical & Physical Characteristics

### Technical Data

Form	Suspension
Color	Clear to slightly cloudy
Density*	74.9 lb/ft <sup>3</sup> (1.2 g/cm <sup>3</sup> )
pH*	10.5
Viscosity*	7 cP (mPa.s)

\* @ 68 °F (20 °C)

**Guidelines for Use**

**Gel Time:** The desired gel time can be achieved by adding an accelerator, typically a 10% NaCl solution, at the required ratio. Refer to Figure 1 for gel time variations based on accelerator dosage and temperature.

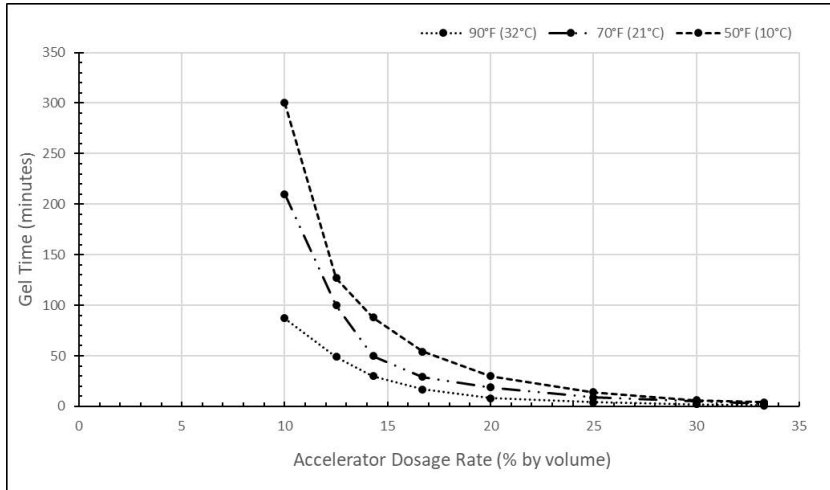


Figure 1

To achieve longer gel times, accelerators of less than 10% NaCl concentration may be used. Please consult your Master Builders Representatives for more information.

**Application Procedures:** MasterRoc MP 326 must be continuously stirred during the addition of the accelerator, which needs to be fully mixed before pumping. The fully mixed MasterRoc MP 326 and the accelerator can be pumped into the strata or ground with a single-component pump through an injection packer system.

MasterRoc MP 326 and the accelerator can also be injected via two-component equipment. In that case, a static in-line mixer is necessary to mix the MasterRoc MP 326 and the accelerator thoroughly.

**Cleaning of the Injection Equipment:** All equipment can be cleaned with fresh water.

**Performance Characteristics**

**Compressive Strength Development:** Proper application of MasterRoc MP 326 enhances soil strength, improves ground stability, and reduces permeability. Over time, it develops higher compressive strength compared to traditional ground improvement materials. Refer to Figure 2 for strength development data (tested per ASTM D 4219).

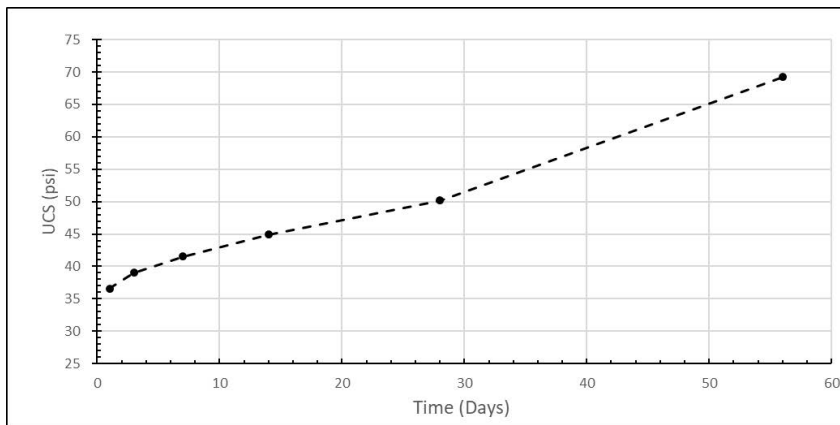


Figure 2

- Testing standard: ASTM D 4219 – 22
- Material and ambient temperature: 70°F (21°C)
- Mix design: Ottawa 20-30 sand, MasterRoc MP 326, accelerator (10% NaCl solution)
- Setup: 2"x4" (5x10 cm) cylinder

#### Permeability:

- < 1x10<sup>-8</sup> cm/sec (Tested per ASTM D 5084)
- Testing Conditions: Conducted at 68°F (20°C) with Ottawa 20/30 sand remolded to a medium-dense state and grouted with MasterRoc MP 326. Cured mixtures were tested under an effective stress of 5 psi (35 kPa). Results based on 28-day data.

#### Storage and Handling

**Storage:** MasterRoc MP 326 should be stored between 40 °F and 95 °F (5 °C and 35°C). Do not allow the product to freeze. Store under cover, away from direct sunlight and extreme temperatures.

**Shelf Life:** MasterRoc MP 326 has a shelf life of at least 12 months when stored in unopened, tightly sealed original containers. For MasterRoc MP 326 stored for more than 12 months, consult your Master Builders Solutions representative before use

**Safety:** MasterRoc MP 326 contains no hazardous materials that require labeling. Standard precautions for handling chemical products should be followed:

- Avoid eye and skin contact.
- Wear hand gloves and safety goggles.
- If contact occurs, rinse with plenty of water.
- In case of eye contact, seek medical attention immediately.
- The cured grout is physiologically harmless.

#### Packaging

MasterRoc MP 326 is available in 266-gallon (1008 L) totes, 54-gallon (205 L) drums, and 5-gallon (18.9 L) pails. Bulk delivery is available upon request.

#### Related Documents

Safety Data Sheet (SDS): MasterRoc MP 326.

#### Additional Information

For additional information on MasterRoc MP 326, please contact your local sales representative.

*Master Builders Solutions creates technologies for the construction industry inspiring people to build better. We are active in ~40 countries and operate 35 production sites with over 1,600 employees. We develop, produce, and market high-quality chemical admixtures, as well as adjacent core technologies, to master the challenges of today and support a decarbonized future. Our people are pivotal and pair leading technologies and a strong brand heritage to surpass our customers' expectations and drive continuous value creation.*

#### Limited Warranty Notice

Master Builders Solutions Admixtures US, LLC ("Master Builders Solutions") warrants this product to be free from manufacturing defects and to meet the technical properties on the current Technical Data Guide, if used as directed within shelf life. Satisfactory results depend not only on quality products but also upon many factors beyond our control. MASTER BUILDERS SOLUTIONS MAKES NO OTHER WARRANTY OR GUARANTEE, EXPRESS OR IMPLIED, INCLUDING WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE WITH RESPECT TO ITS PRODUCTS. The sole and exclusive remedy of Purchaser for any claim concerning this product, including but not limited to, claims alleging breach of warranty, negligence, strict liability or otherwise, is shipment to purchaser of product equal to the amount of product that fails to meet this warranty or refund of the original purchase price of product that fails to meet this warranty, at the sole option of Master Builders Solutions. Any claims concerning this product must be received in writing within one (1) year from the date of shipment and any claims not presented within that period are waived by Purchaser. MASTER BUILDERS SOLUTIONS WILL NOT BE RESPONSIBLE FOR ANY SPECIAL, INCIDENTAL, CONSEQUENTIAL (INCLUDING LOST PROFITS) OR PUNITIVE DAMAGES OF ANY KIND.

Purchaser must determine the suitability of the products for the intended use and assumes all risks and liabilities in connection therewith. This information and all further technical advice are based on Master Builders Solutions' present knowledge and experience. However, Master Builders Solutions assumes no liability for providing such information and advice including the extent to which such information and advice may relate to existing third party intellectual property rights, especially patent rights, nor shall any legal relationship be created by or arise from the provision of such information and advice. Master Builders Solutions reserves the right to make any changes according to technological progress or further developments. The Purchaser of the Product(s) must test the product(s) for suitability for the intended application and purpose before proceeding with a full application of the product(s). Performance of the product described herein should be verified by testing and carried out by qualified experts.