

MasterRoc[®] MP 358 SC

Highly reactive, two component hydrophobic polyurethane injection resin for strata consolidation

Material Description

MasterRoc MP 358 SC is a two component, solvent-free polyurethane injection resin specifically designed for rapid stabilization of strata where high compressive and bonding strength is needed.

Areas of Application

- Consolidation of fractured rock in underground structures
- Consolidation of broken coal in development roadways and longwalls
- Sealing against gas and water

Characteristics and Benefits

- Fast reacting material applied where structural strength and flexibility is required.
- Reacts and expands in volume up to 3 times without water contact.
- Penetrates cracks wider than 0.14 mm.
- When in contact with water, the foam factor may increase to about 8.
- Low sensitivity to water.
- Almost no increase of reaction temperature in contact with water.
- Good bonding on wet and damp surfaces

Packaging

Part A: 25 kg cans and 205 kg drums

Part B: 30 kg cans and 250 kg drums

Technical Data

(at 23° C)	Color	Viscosity mPa.s	Density kg/l
Part A	Yellow	300	1.01
Part B	Dark brown	240	1.22

Flash point: A & B separately: > 200°C


Mixing ratio Part A to B: 1 to 1 by volume

Reaction Characteristics

Testing temp.	25°C
Start of foaming	45s ± 15s
End of foaming	70s ± 10s
Foam expansion factor	ca. 3
Flexural adhesive strength (24 h)	> 6 N/mm ²
Border time	< 10 min

Border time: Time needed to reach 1 MPa adhesive strength in lab conditions

Reaction Temperature

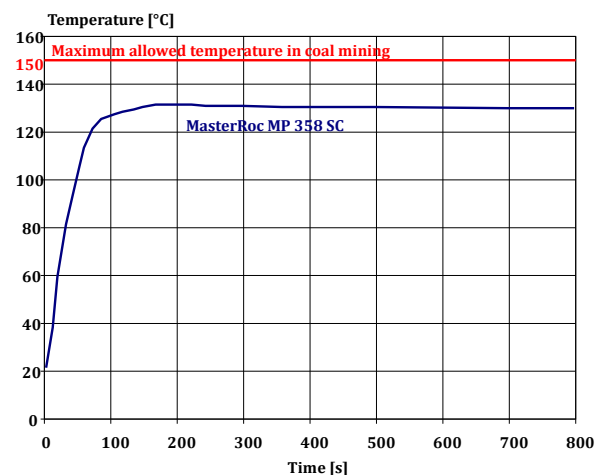

Application Procedure

Part A and B are delivered ready to use. They are injected in the proportion of 1:1 by volume using a two-component injection pump equipped with a static in-line mixer nozzle, as shown below:



MasterRoc[®] MP 358 SC

Highly reactive, two component hydrophobic polyurethane injection resin for strata consolidation



example of a two-component injection pump

Please note: The curing reaction time is dependent on the temperature of the product and the ground. Please store both parts prior to application at a minimum temperature of 15°C. To achieve the best mixing of the components during injection, the inclusion of a static in-line mixer in connection with the mixing head is strongly advised. The length of the static mixer should be approximately 32 cm.

Cleaning of Injection Equipment

For short breaks in the injection procedure, pump Part A through the in-line static mixer nozzle. After the injection process pump an appropriate cleaning and maintenance agent (MasterRoc MP 230 CLN) or oil containing no water, through the pump and injection hoses until MasterRoc MP 358 SC is

completely washed out. Store the pump and hoses with the cleaning agent inside and seal all openings.

Storage

If stored in dry conditions, in unopened, tightly closed original containers and within a temperature range of +5°C and +35°C, the components of MasterRoc MP 358 SC have a shelf life of 24 months.

Precautions

Refer to the Material Safety Data Sheet for safety measures:

MasterRoc MP 358 SC – Part A

MasterRoc MP 358 – Part B

Avoid contact with skin and eyes by using the required personal protective equipment, such as overalls, gloves, and safety glasses. If contact with skin occurs, wash thoroughly using soap and water. If contact with eyes occurs, rinse thoroughly with an eyebath filled with water and seek medical advice. The product is harm-less.

Uncured liquid materials should be prevented from entering local drainage systems and water courses. Spillage must be collected using absorbent materials such as sawdust and sand and disposed of in accordance with local regulations.

Disclaimer

The information given here is true, represents our best knowledge and is based not only on laboratory work but also on field experience. However, because of numerous factors affecting results, we offer this information without guarantee and no patent liability is assumed. For additional information or questions, please contact your local representative.

Contact Details

Master Builders Solutions UK Ltd
Swinton Hall Road,
Swinton,
Manchester,
M27 4EU

Tel: +44 (0) 161 727 6300

www.master-builders-solutions.com/en-gb

