

LSS222 Beacon

CODE 3


www.code3esg.com/au/en

**It's
Here!**

**An LED Beacon that truly meets
strobe and halogen
performance!**



Featuring 2 Levels of LEDs

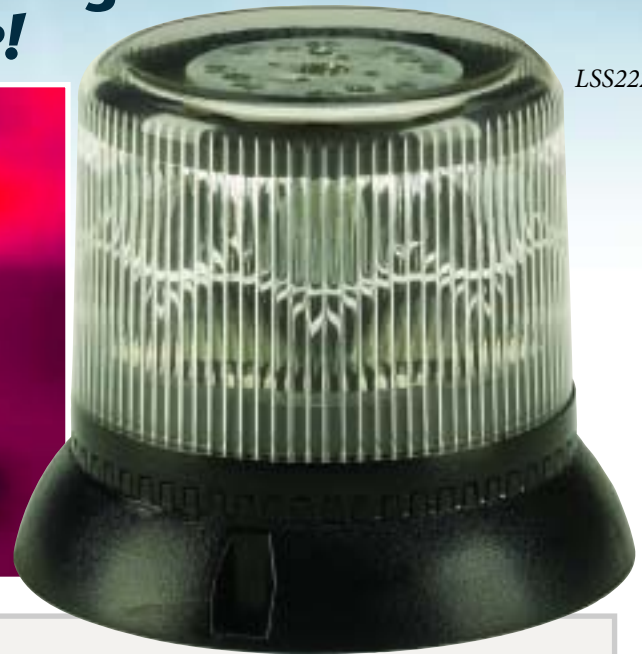

LSS222CA

Benefits

- ◆ Two levels of unique LED reflectors provide a focused signal for superior brightness
- ◆ Lens construction provides an excellent horizontal spread for easy identification of signal
- ◆ 39 flash patterns including 4 simulated rotating patterns provide plenty of options
- ◆ Low amp draw and bright output provide the ideal beacon for everyday use

Design Features

- Two Levels of 8 LEDs Each
- Clear, Amber, Red, and Blue Polycarbonate Lenses Available
- Provide 360° of Coverage
- Waterproof, Shock Resistant, Potted Circuit Board
- Amber, Red, and Blue LEDs; Green and White have Limited Availability.
- Permanent Mount Standard. Also Available with Suction/Magnetic Mount with 9' Straight Cord.
- Black Powder Coated Die-Cast Base
- 39 Built-in User Selectable Flash Patterns, Including 4 Simulated Rotating Patterns

Options

- LSS265 European Approved Version also Available
- 1" Pipe Mount Available (LLPMK-1H) on Permanent Mount

Model Number	Lens Color	LED Color	Base
LSS222CA	Clear	Amber	Permanent
LSS222A	Amber	Amber	Permanent
LSS222R	Red	Red	Permanent
LSS222B	Blue	Blue	Permanent
LSS222CAM	Clear	Amber	Suction/Magnetic
LSS222AM	Amber	Amber	Suction/Magnetic
LSS222BM	Blue	Blue	Suction/Magnetic

Specifications

- Pipe/Permanent Mount: 4.57" H x 5.75" Base Diameter (116.1 mm x 146 mm). Lens Diameter: 4.29" (109 mm)
- Magnetic Mount: 4.84" H x 6.38" Base Diameter (122.8 mm x 162 mm). Lens Diameter: 4.29" (109 mm)
- 10–30 Volt DC, Reverse Polarity Protected
- 0.85 Amps Average
- 5-Year Warranty
- SAE J845, Class 1
- **California Title 13 Compliant in Red, Blue and Amber**
- Meets ECE65 in Blue Only



LSS222CAM