



www.you

User Manual

Fastrack Supreme IESM-IO+USB

Reference: **WA_DEV_Fastrk_UGD_006**

Revision: **001**

Date: **November 29, 2007**

wavecom[®]
Make it wireless

Operating Systems | Plug-Ins | Integrated Development Environments | **Wireless CPUs** | Services


Plug and Play Fastrack Supreme Wireless CPU[®]

IESM-IO+USB User Guide

Reference: WA_DEV_Fastrk_UGD_006

Revision: 001

Date: 29 November, 2007

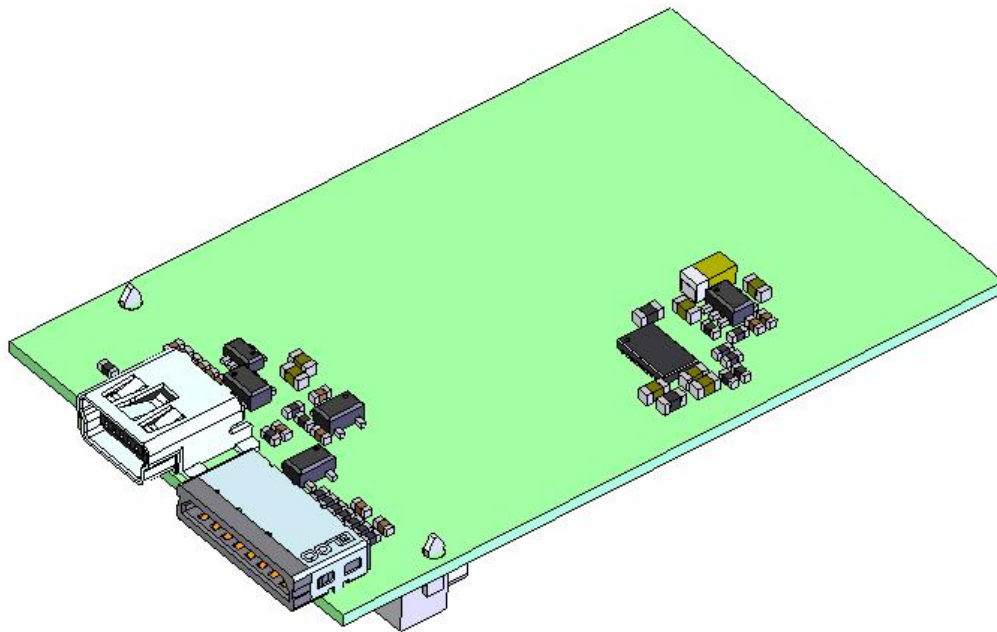

Document History

Revision	Date	List of revisions	
001	05 June, 07	First Issue	
	31 October, 07	Update	
	29 November, 07	Update	

Overview

The Internal Expansion Socket Module (IESM) is a Plug & Play device to expand the functionality of a standard Fastrack Supreme 10 and Fastrack Supreme 20 into a state of the art IO+USB device for machine to machine applications.

With the IESM it is possible to utilize the Internal Expansion Socket (IES) which opens wide applications for Fastrack Supreme 10 and Fastrack Supreme 20 by simply plugging in.

Fastrack Supreme with IESM-IO+USB plugged-in may utilize one or more Open AT® Plug-Ins of the powerful Open AT® software suite. Open AT® is the world's most comprehensive cellular development environment, which allows embedded standard ANSI C applications to be natively executed directly on the Wireless CPU®.

Topics covered by this document;

- General description
- Functional description
- Basic services available
- Technical characteristics
- Installing and using the IESM-IO+USB
- User-level troubleshooting
- Recommended accessories to be used with the product

Note:

This document covers the Supreme IESM-IO+USB Plug & Play alone and does not include;

- The programmable capabilities provided via the use of Open AT® Software Suites.
- The development guide for IESM for expanding the application feature through the IES interface.

For details, please refer to the documents shown in the "Reference documents" section.

RoHS Directive

The Supreme and IESM-IO+USB are now compliant with RoHS Directive 2002/95/EC, which sets limits for the use of certain restricted hazardous substances. This directive states that "from 1st July 2006, new electrical and electronic equipment put on the market does not contain lead, mercury, cadmium, hexavalent chromium, polybrominated biphenyls (PBB), and polybrominated diphenyl ethers (PBDE)".

Plug & Plays which are compliant with this directive are identified by the RoHS logo on their label.



Disposing of the product

This electronic product is subject to the EU Directive 2002/96/EC for Waste Electrical and Electronic Equipment (WEEE). As such, this product must not be disposed off at a municipal waste collection point. Please refer to local regulations for directions on how to dispose off this product in an environmental friendly manner.






Cautions

Information furnished herein by WAVECOM is accurate and reliable. However, no responsibility is assumed for its use. Please read carefully the safety recommendations given in Chapter 11 for an application based on Fastrack Supreme Plug & Play.

IESM are ESD sensitive, it is recommended to use standard ESD precautions, as described in the following norm:

JEDEC standard JESD625-A, Requirements for Handling Electrostatic Discharge-Sensitive (ESDS) Devices.

Trademarks

  ®, "YOU MAKE IT, WE MAKE IT WIRELESS®", WAVECOM®, Wireless Microprocessor®, Wireless CPU®, Open AT® and certain other trademarks and logos appearing on this document, are filed or registered trademarks of Wavecom S.A. in France and/or in other countries. All other company and/or product names mentioned may be filed or registered trademarks of their respective owners.

Copyright

This manual is copyrighted by WAVECOM with all rights reserved. No part of this manual may be reproduced, modified or disclosed to third parties in any form without the prior written permission of WAVECOM.

No Warranty/No Liability

This document is provided "as is". Wavecom makes no warranties of any kind, either expressed or implied, including any implied warranties of merchantability, fitness for a particular purpose, or noninfringement. The recipient of the documentation shall endorse all risks arising from its use. In no event shall Wavecom be liable for any incidental, direct, indirect, consequential, or punitive damages arising from the use or inadequacy of the documentation, even if Wavecom has been advised of the possibility of such damages and to the extent permitted by law.

Web Site Support

General information about Wavecom and its range of products:	www.wavecom.com
Specific support is available for the Fastrack Supreme Plug & Play Wireless CPU®:	www.wavecom.com/fastracksupreme
Carrier/Operator approvals:	www.wavecom.com/approvals
Open AT® Introduction:	www.wavecom.com/OpenAT
Developer support for software and hardware:	www.wavecom.com/forum

Table of Contents

1	REFERENCES.....	11
1.1	Reference Documents.....	11
1.1.1	Open AT® Software Documentation	11
1.1.2	AT Software Documentation.....	11
1.1.3	Fastrack Supreme Related Documents.....	11
1.1.4	Fastrack Supreme IESM Related Documents	11
1.2	Abbreviations	12
2	PACKAGING	15
2.1	Contents.....	15
2.2	Packaging Box.....	16
2.3	Production Sticker	17
3	GENERAL INFORMATION	18
3.1	Description	18
3.2	External Connections.....	19
3.2.1	16-Way IO Socket.....	19
3.2.2	Mini-B USB Connector.....	20
3.2.3	IES 50-pin Connector.....	21
4	IESM IO+USB BASIC REQUIREMENTS	22
4.1	USB Requirements	22
5	FEATURES AND SERVICES	23
5.1	Basic Features and Services	23
6	TECHNICAL CHARACTERISTICS	24
	Mechanical Characteristics.....	24
6.1	24	
7	USING FASTRACK SUPREME IESM-IO+USB.....	25
7.1	Getting Started	25
7.1.1	Installing IESM-IO+USB.....	25
7.1.2	Quick Check.....	26
8	TROUBLESHOOTING	27
8.1	No Communication with IESM-IO+USB through the Serial Link.....	28

9	FUNCTIONAL DESCRIPTION	29
9.1	Architecture	29
9.2	Power Supply	30
9.3	Auxiliary Serial Link (UART2)	30
9.4	USB 2.0 Interface	31
9.5	General Purpose Input/Output	31
9.6	SPI Bus	32
9.6.1	SPI configuration	33
9.7	Environmental Characteristics	33
9.8	Conformity	35
10	CONNECTOR AND PERIPHERAL DEVICES REFERENCES	36
10.1	General Purpose Connector References	36
11	SAFETY RECOMMENDATIONS	37
11.1	General Safety	37
11.2	Vehicle Safety	38
11.3	Care and Maintenance	38
11.4	Your Responsibility	38
12	RECOMMENDED ACCESSORIES	39
13	ONLINE SUPPORT	39

List of Figures

Figure 1: Complete package contents	15
Figure 2: Packaging box	16
Figure 3: Production sticker	17
Figure 4: IESM general description	18
Figure 5: 16-Way IO Expander Socket	19
Figure 6: USB connector.....	20
Figure 7: IESM 50-pin connector	21
Figure 8: IESM-IO+USB Dimensions.....	24
Figure 9: IESM-IO+USB Mounting.....	25
Figure 10: COM1 Properties window	26
Figure 11: Wavecom Properties window	27
Figure 12: Functional architecture	29

List of Tables

Table 1: 16-Way IO Expander Description	20
Table 2: USB Pin Description	21
Table 3: IESM 50-pin connector description	21
Table 4: Basic features of IESM-IO+USB	23
Table 5: Mechanical Characteristics	24
Table 6: Solutions for no connection with Supreme through serial link.....	28
Table 7: Electrical characteristics.....	30
Table 8: Pin description of UART2 interface.....	30
Table 9: Pin description of the USB interface	31
Table 10: GPIO Information	32
Table 11: AC characteristics	32
Table 12: SPI Configuration	33
Table 13: Pin description	33
Table 14: Ranges of temperature.....	33
Table 15: Environmental standard constraints.....	34
Table 16: Domains and applicable standards	35
Table 17: List of recommended accessories.....	39

1 References

1.1 Reference Documents

For more details, several reference documents may be consulted. The Wavecom reference documents are provided in the Wavecom documents package contrary to the general reference documents, which are not Wavecom owned.

1.1.1 Open AT® Software Documentation

- [1] Getting started with Open AT® SDK v4.22 (Ref. WM_DEV_OAT_UGD_048)
- [2] Tutorial for Open AT® IDE V1.04 (Ref. WM_DEV_OAT_UGD_044)
- [3] Tools Manual for Open AT® IDE V1.04 (Ref. WM_DEV_OAT_UGD_045)
- [4] Basic Development Guide for Open AT®V4.21
(Ref. WM_DEV_OAT_UGD_050)
- [5] ADL User Guide for Open AT®V4.21 (Ref. WM_DEV_OAT_UGD_051)
- [6] Open AT® v4.22 Official Release Note (Ref. WM_DEV_OAT_DVD_338)

1.1.2 AT Software Documentation

- [7] AT commands interface Guide for FW v6.63
(Ref. WM_DEV_OAT_UGD_049)
- [8] Open AT® Firmware v6.63 Customer Release Note
(Ref. WM_PGM_OAT_CRN_001)

1.1.3 Fastrack Supreme Related Documents

- [9] Fastrack Supreme User Guide (Ref. WA_DEV_Fastrk_UGD_001)

1.1.4 Fastrack Supreme IESM Related Documents

- [10] Fastrack Supreme IESM Product Technical Specifications
(Ref. WA_DEV_Fastrk_PTS_001)
- [11] IESM-IO+USB Installation Guide (Ref. WA_DEV_Fastrk_UGD_005)

Note:

New versions of software may be available. Wavecom recommends customers to check the web site for the latest documentation.

1.2 Abbreviations

Abbreviation	Definition
AC	Alternating Current
ACM	Accumulated Call Meter
AT	ATtention (prefix for Wireless CPU® commands)
CLK	CLock
CMOS	Complementary Metal Oxide Semiconductor
CS	Coding Scheme
CTS	Clear To Send
dB	Decibel
dBc	Decibel relative to the Carrier power
dB _i	Decibel relative to an Isotropic radiator
dB _m	Decibel relative to one milliwatt
DC	Direct Current
DCD	Data Carrier Detect
DCE	Data Communication Equipment
DCS	Digital Cellular System
DSR	Data Set Ready
DTE	Data Terminal Equipment
DTMF	Dual Tone Multi-Frequency
DTR	Data Terminal Ready
EEPROM	Electrically Erasable Programmable Read-Only Memory
EFR	Enhanced Full Rate
E-GSM	Extended GSM
EMC	ElectroMagnetic Compatibility
EMI	ElectroMagnetic Interference
ESD	ElectroStatic Discharges
ETSI	European Telecommunications Standards Institute
FIT	Series of connectors (micro-FIT)
FR	Full Rate
FTA	Full Type Approval
GCF	Global Certification Forum
GND	GrouND
GPIO	General Purpose Input Output

Abbreviation	Definition
GPRS	General Packet Radio Service
GPS	Global Positioning System
GSM	Global System for Mobile communications
HR	Half Rate
I	Input
IEC	International Electrotechnical Commission
IES	Internal Expansion Socket
IESM	Internal Expansion Socket Module
IMEI	International Mobile Equipment Identification
I/O	Input / Output
LED	Light Emitting Diode
MAX	MAXimum
ME	Mobile Equipment
MIC	MICrophone
Micro-Fit	Family of connectors from Molex
MIN	MINimum
MNP	Microcom Networking Protocol
MO	Mobile Originated
MS	Mobile Station
MT	Mobile Terminated
NOM	NOMinal
O	Output
Pa	Pascal (for speaker sound pressure measurements)
PBCCH	Packet Broadcast Control CHannel
PC	Personal Computer
PCL	Power Control Level
PDP	Packet Data Protocol
PIN	Personal Identity Number
PLMN	Public Land Mobile Network
PUK	Personal Unblocking Key
RF	Radio Frequency
RFI	Radio Frequency Interference
RI	Ring Indicator
RMS	Root Mean Square
RTS	Request To Send

Abbreviation	Definition
RX	R eceive
SIM	S ubscriber I dentification M odule
SMA	S ub M iniature version A R F connector
SMS	S hort M essage S ervice
SNR	S ignal-to- N oise R atio
SPL	S ound P ressure L evel
SPK	S pea K er
SRAM	S tatic R AM
TCP/IP	T ransmission C ontrol P rotocol / I nternet P rotocol
TDMA	T ime D ivision M ultiple A ccess
TU	T ypical U rban fading profile
TUHigh	T ypical U rban, H igh speed fading profile
TX	T ransmit
TYP	TYP ical
USB	U niversal S erial B us
VSWR	V oltage S tationary W ave R atio

2 Packaging

2.1 Contents

The complete package contents of the IESM-IO+USB consists of the following:

- 1 piece packaging box (A)
- 100 pieces IESM-IO+USB (B)
- 100 pieces Backplate and Spring Contact (C)
- 3 Pieces Extraction Tool (D)
- Installation Guide (E)



Figure 1: Complete package contents

2.2 Packaging Box

The packaging box external dimensions:

- width: 290 mm
- height: 65 mm
- length: 455 mm

Label placed indicates:

- WAVECOM logo
- Product reference (IESM-IO+USB)
- CE mark
- RoHS Logo



Figure 2: Packaging box

The packaging label dimensions are:

- height: [TBD] mm
- length: [TBD] mm

2.3 Production Sticker

A production sticker (see

Figure 3) located at the back side with the following information:

- Product Name (IESM IO+USB),
- Marketing Name (FSUE002)
- Bar Code
- 17 Digit Serial Number



Figure 3: Production sticker

3 General Information

3.1 Description

The IESM-IO+USB description is shown below.

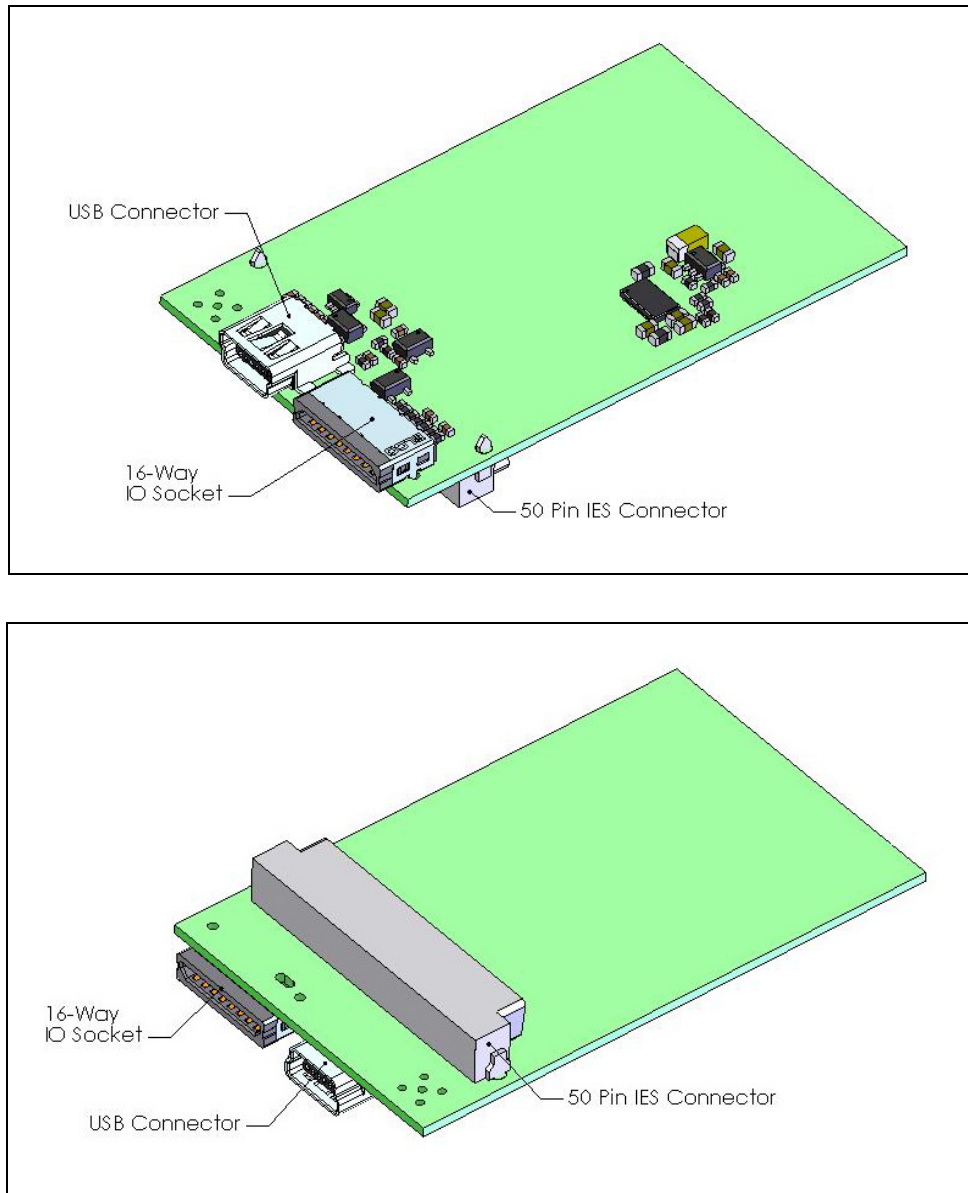


Figure 4: IESM general description

3.2 External Connections

3.2.1 16-Way IO Socket

The 16-Way IO expander socket is an external interface of IESM for customer's applications.

Available on this socket;

- 1 - UART2 (TXD2, RXD2, CTS2, RTS2)
- 5 - GPIOs
- 1 - AUX-DAC
- 1 - AUX-ADC
- 1 - SPI1 (SPI1-IO, SPI1-I1, SPI1-CLK, SPI1-CS)

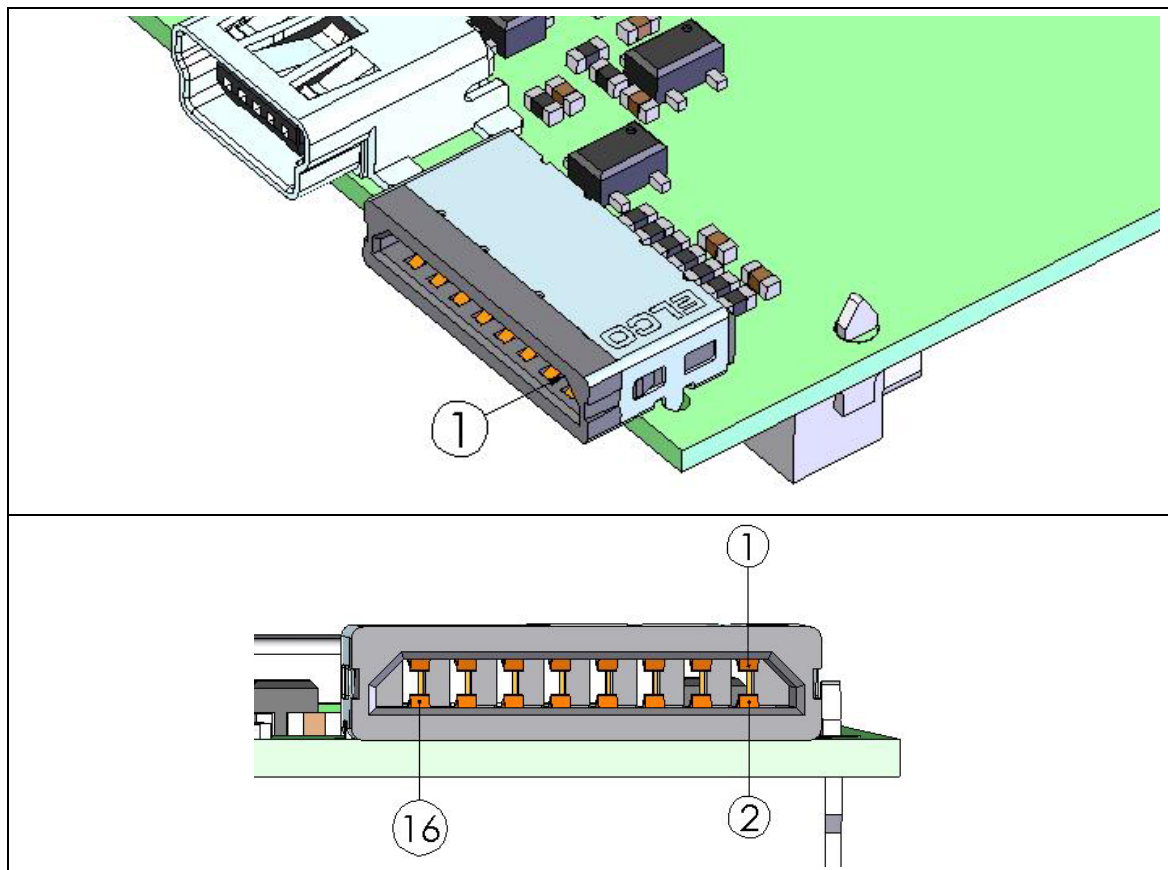


Figure 5: 16-Way IO Expander Socket

For 16-Way connector specifications please refer to Chapter 10, "Connector and Peripheral Devices References".

Table 1: 16-Way IO Expander Description

Pin #	Pin Description	Pin #	Pin Description
1	RXD2	9	GPIO26
2	TXD2	10	AUX-DAC
3	CTS2	11	AUX-ADC
4	RTS2	12	SPI1-IO
5	GPIO23	13	SPI1-I
6	GPIO20	14	SPI1-CLK
7	GPIO27	15	SPI1-CS
8	GPIO19	16	GND

3.2.2 Mini-B USB Connector

Standard Mini-B USB connector for communicating with:

- Wireless CPU

This port is USB 2.0 compliant.

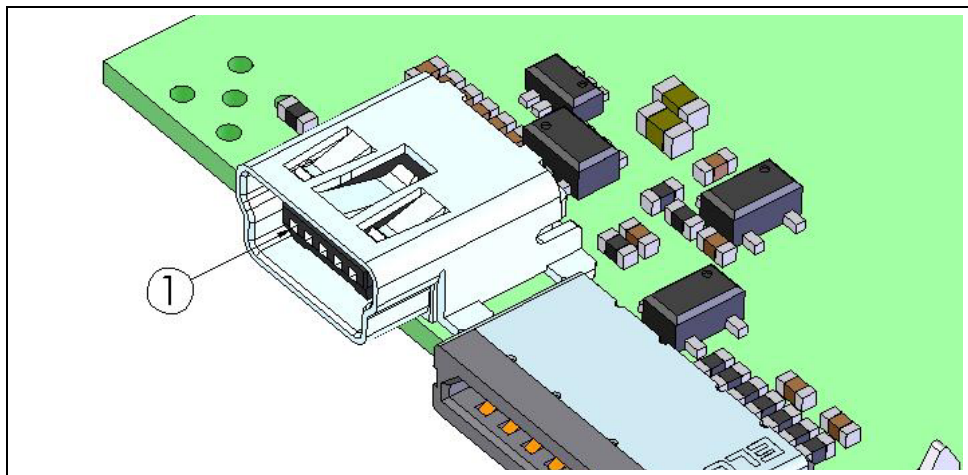


Figure 6: USB connector

For USB connector specifications please refer to Chapter 10, "Connector and Peripheral Devices References".

Table 2: USB Pin Description

Pin #	Pin Description
1	VBUS
2	D-
3	D+
4	NC
5	GND

3.2.3 IES 50-pin Connector

IESM high density 50-pin connector is used for:

- Interface with Fastrack Supreme motherboard

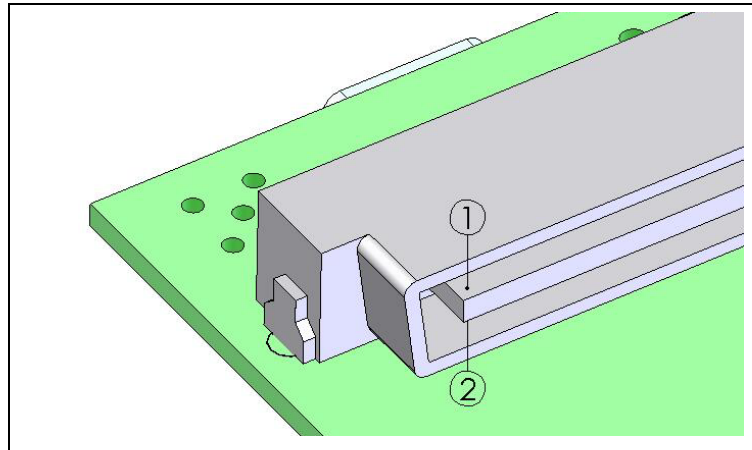


Figure 7: IESM 50-pin connector

For IESM 50-Pin connector specifications please refer to Chapter 10, "Connector and Peripheral Devices References".

Table 3: IESM 50-pin connector description

Pin #	Pin Description	Pin #	Pin Description
1	GND	26	RTS2
2	GND	27	SHTDN
3	Reserved	28	GPIO26
4	Reserved	29	GPIO19
5	Reserved	30	GPIO27
6	Reserved	31	GPIO20
7	VPAD-USB	32	INT0/GPIO3

Pin #	Pin Description	Pin #	Pin Description
8	USB-DP	33	GPIO23
9	USB-DM	34	GPIO22
10	GSM-1V8	35	DTR1-CT108/2
11	GSM-2V8	36	PCM-SYNC
12	BOOT	37	PCM-IN
13	RESET	38	PCM-CLK
14	AUX-ADC	39	PCM-OUT
15	SPI1-CS	40	AUX-DAC
16	SPI1-CLK	41	VCC-2V8
17	SPI1-I	42	GND
18	SPI1-IO	43	DC-IN
19	SPI2-CLK	44	DC-IN
20	SPI2-IO	45	GND
21	SPI2-CS	46	4V
22	SPI2-I	47	4V
23	RXD2	48	GND
24	TXD2	49	GND
25	CTS2	50	GND

4 IESM IO+USB Basic Requirements

IESM IO+USB require the necessary environment to function properly.

4.1 USB Requirements

- USB driver for Fastrack Supreme

5 Features and Services

5.1 Basic Features and Services

Basic features of the IESM-IO+USB are summarized in the table below.

Table 4: Basic features of IESM-IO+USB

Features	Description
Open AT®	Open AT® programmable: Native execution of embedded standard ANSI C applications, Custom AT command creation, Custom application library creation, Standalone operation.
Interfaces	<p>USB 2.0 Compliant</p> <p>RS232 (V.24/V.28) Serial interface supporting:</p> <ul style="list-style-type: none"> ▪ Baud rate (bits/s): 300, 600, 1200, 2400, 4800, 9600, 19200, 38400, 57600, 115200, 230400, 460800, 921600 <p>General Purpose Input/Output gates (GPIOs)</p> <ul style="list-style-type: none"> ▪ 2.8V gates <p>Digital to Analog Converter (DAC)</p> <ul style="list-style-type: none"> ▪ 8-bit resolution, ranging from 0 to 2.3V <p>Analog to Digital Converter (ADC)</p> <ul style="list-style-type: none"> ▪ 10-bit resolution, ranging from 0 to 2V <p>SPI Bus</p> <ul style="list-style-type: none"> ▪ Master mode ▪ 101.5Kbit/s to 13Mbit/s ▪ 3 or 4 wire interface ▪ SPI mode configuration, 0 to 3 ▪ 1 to 16 bits data lengths <p>AT command set based on V.25 and GSM 07.05 & 07.07.</p> <p>Open AT® interface for embedded application.</p>

6 Technical Characteristics

6.1 Mechanical Characteristics

Table 5: Mechanical Characteristics

PCB Dimensions	58mm x 35.7mm x 1mm
Overall Dimension	59.5 x 35.7 x 10.01mm (including connectors)
Weight	< 10 grams

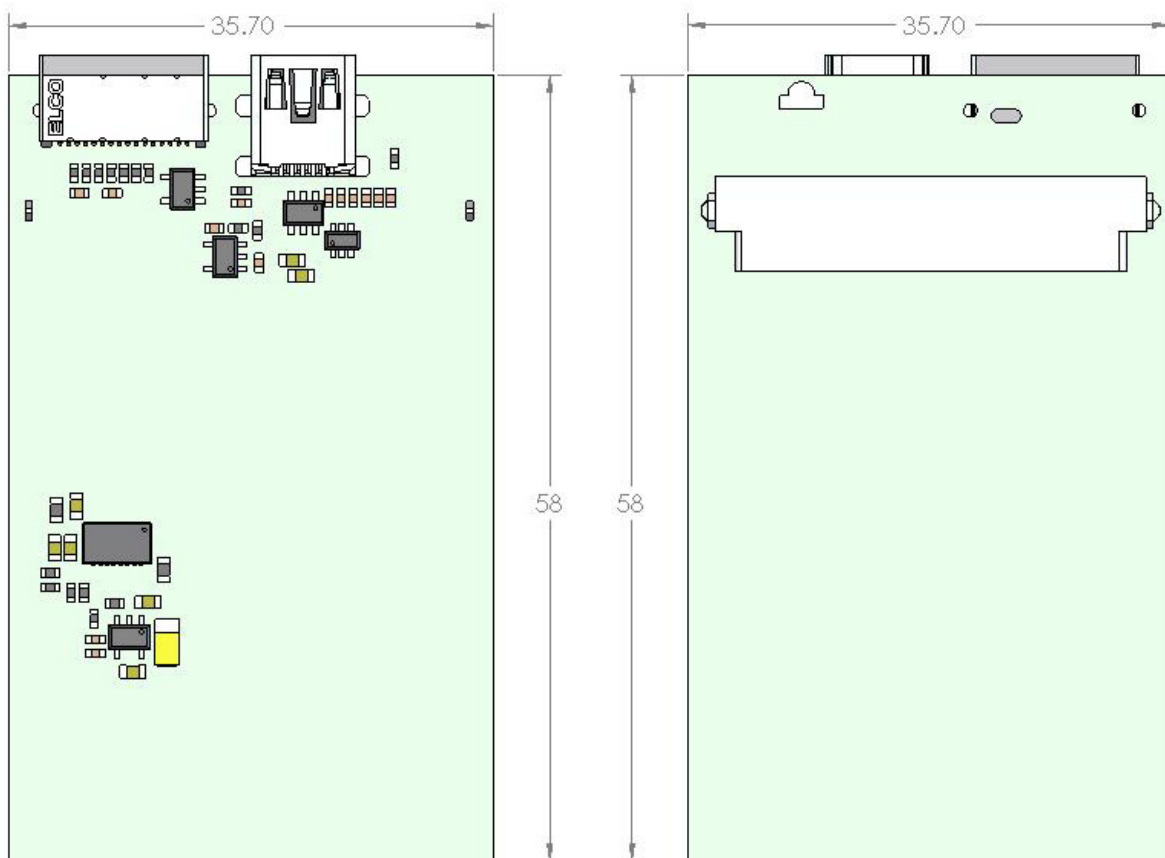


Figure 8: IESM-IO+USB Dimensions

7 Using Fastrack Supreme IESM-IO+USB

7.1 Getting Started

7.1.1 Installing IESM-IO+USB

To install the IESM-IO+USB please follow the procedures below. It is important to remove the power on the Fastrack Supreme when performing this installation;

1. Remove the screws and the original backplate cover of the Fastrack Supreme
2. Insert the IESM-IO+USB board. Replace the original backplate with the IESM-IO+USB backplate provided and place back the screws.

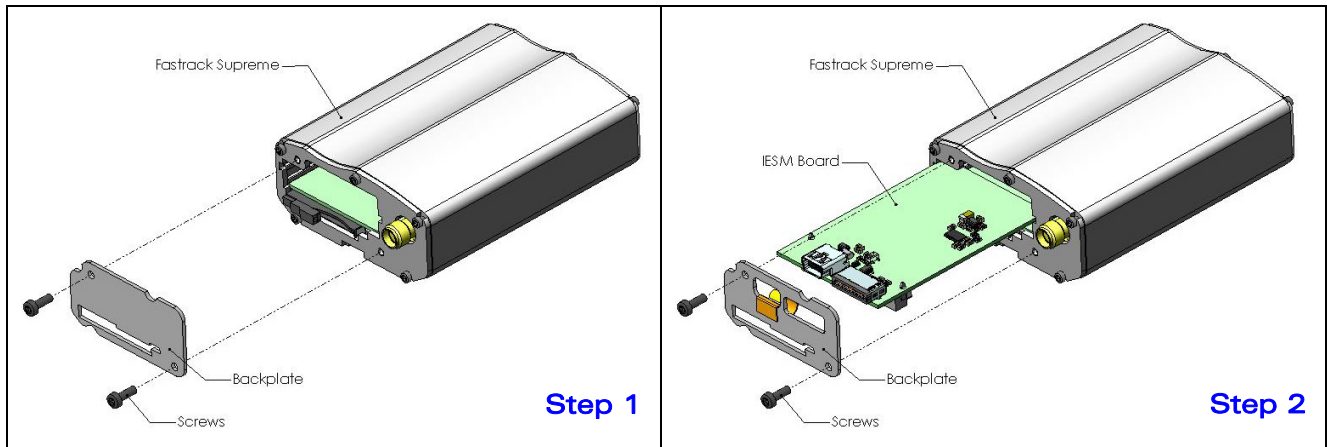


Figure 9: IESM-IO+USB Mounting

7.1.2 Quick Check

To check if the installation of the IESM-IO+USB with Fastrack Supreme is ok, please perform a simple test on USB.

- 1 Connect a serial cable between Fastrack Supreme and PC COM port
- 2 Apply power on Fastrack Supreme
- 3 Open communication software (HyperTerminal), if COM port not configured yet please enter as follows;

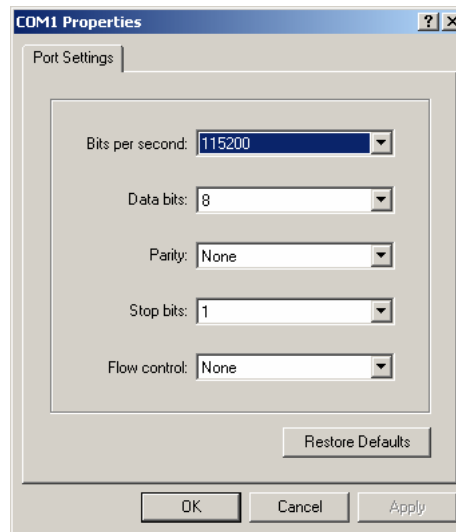


Figure 10: COM1 Properties window

- 4 Activate the USB port, enter AT command shown below;
`AT+WMFM=0,1,3`
- 5 Connect USB cable between IESM and PC
- 6 PC running Windows should detect the new USB device. It will prompt to install the USB driver.
- 7 Install the USB driver on Fastrack Supreme, driver could be found on SDK V4.22.
- 8 Once USB driver is installed, open a new connection this time configure it to use the USB port

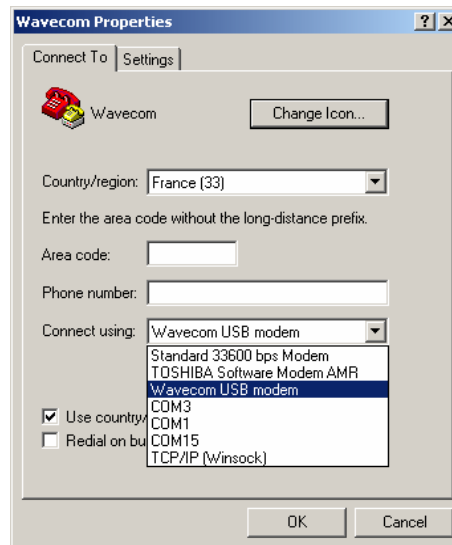


Figure 11: Wavecom Properties window

9 On the new communication window type the AT command shown below. This will echo on the screen what is being typed;

ATE1 → Fastrack Supreme responds "OK"

10 Enter the AT command as indicated below to check the manufacturer identification;

AT+CGMI → Fastrack Supreme responds "WAVECOM MODEM"

IESM is now properly installed. For further information on these AT commands and their associated parameters, refer to "AT Commands Interface Guide" [7].

8 Troubleshooting

This section of the document describes possible problems encountered when using the IESM-IO+USB.

To review other troubleshooting information, refer the 'FAQs' (Frequently Asked Questions) page at www.wavecom.com/fastracksupreme.

8.1 No Communication with IESM-IO+USB through the Serial Link

If the Fastrack Supreme or IESM-IO+USB does not answer to AT commands through the USB or serial link, refer to the table below for possible causes and solutions.

Table 6: Solutions for no connection with Supreme through serial link

Symptoms	Check if	Action
Fastrack Supreme UART no response	<ul style="list-style-type: none"> Serial cable is connected on both sides? 	<ul style="list-style-type: none"> Check the serial cable connection
	<ul style="list-style-type: none"> Power is applied? 	<ul style="list-style-type: none"> Check Power Cable Check Fuse
USB not detected	<ul style="list-style-type: none"> USB cable properly inserted? 	<ul style="list-style-type: none"> Unplug cable from PC. Then plug back again if possible on another USB port on the PC.
	<ul style="list-style-type: none"> IESM powered properly? 	<ul style="list-style-type: none"> Make sure the IESM is plugged securely to the Fastrack Supreme
USB does not respond	<ul style="list-style-type: none"> USB port activated? 	<ul style="list-style-type: none"> Send AT+WMFM=0,1,3 to activate USB
	<ul style="list-style-type: none"> USB driver installed? 	<ul style="list-style-type: none"> Install USB driver (from SDK V4.22)
UART2 no response	<ul style="list-style-type: none"> IESM powered properly? 	<ul style="list-style-type: none"> Make sure the IESM is plugged securely to the Fastrack Supreme
	<ul style="list-style-type: none"> The communication program properly configured on PC? 	<ul style="list-style-type: none"> Ensure the setting of the communication program is fit to the following settings; Fastrack Supreme UART 2 factory setting is: <ul style="list-style-type: none"> Data bits = 8 Parity = none Stop bits = 1 Baud = 115 200 bps Flow control = hardware
	<ul style="list-style-type: none"> UART2 activated? 	<ul style="list-style-type: none"> Send AT+WMFM=0,1,2 to activate UART2
	<ul style="list-style-type: none"> There is another program interfering with the communication program (i.e. Conflict on communication port access) 	<ul style="list-style-type: none"> Close the interfering program.

9 Functional Description

The IESM-IO+USB interfaces to the Fastrack Supreme 10/20 mother board through the 50 pin connector. All the DC supplies are applied through this connector so no external supply is necessary.

An RS232 V.24/V.28 compliant transceiver is placed on UART2. USB is a four wire slave interface that complies with USB 2.0 protocol signaling. Both communication interfaces can be used to communicate with the Wireless CPU.

GPIOs, DAC, ADC and SPI bus are transparent from the 50 pin IES connector to the 16-Way IO Expander Socket.

9.1 Architecture

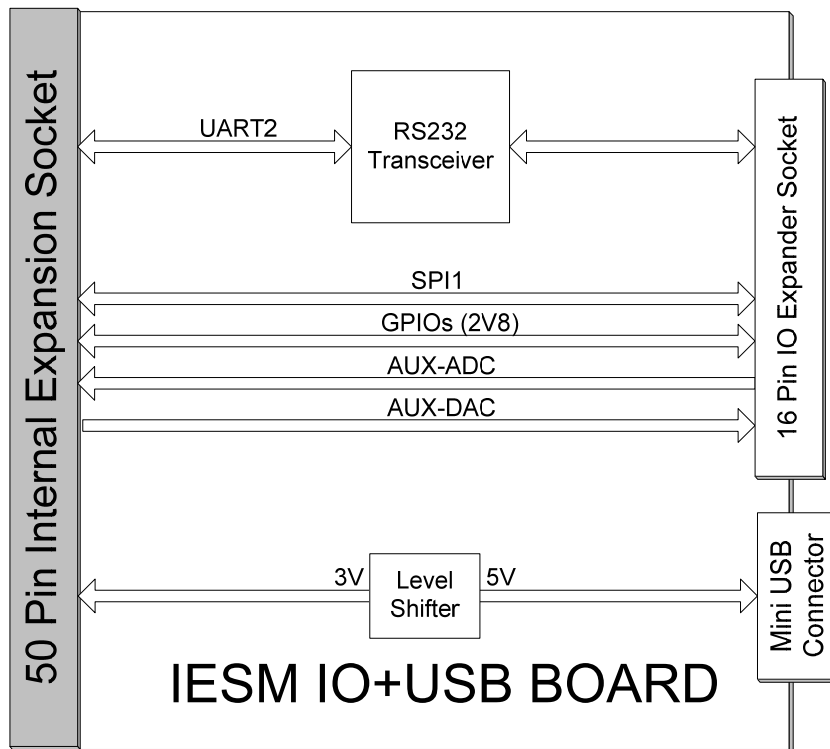


Figure 12: Functional architecture

9.2 Power Supply

Table 7: Electrical characteristics

Operating Voltage	4VDC
Typical Current Consumption	19mA

9.3 Auxiliary Serial Link (UART2)

The IESM-IO+USB have an internal RS232 transceiver for UART2 and V.24/V.28 compliant.

This interface is internally protected (by ESD protection) against electrostatic surges on the RS232 lines.

Filtering guarantees:

- EMI/RFI protection in input and output,
- Signal smoothing.

Signals available on the RS232 serial link are:

- TX data (CT103/TXD2),
- RX data (CT104/RXD2),
- Request To Send (CT105/RTS2)
- Clear To Send (CT106/CTS2)

Table 8: Pin description of UART2 interface

Signal	16-Way IO Expander Pin number	I/O	IO Type RS232 STANDARD	Description
CT103 / TXD2	2	I	TX	Transmit serial data
CT104 / RXD2	1	O	RX	Receive serial data
~CT106 / CTS2	4	O	CTS	Clear To Send
~CT105 / RTS2	3	I	RTS	Request To Send

Fastrack Supreme 10/20 is designed to operate using all the serial interface signals. In particular, it is mandatory to use RTS and CTS for hardware flow control in order to avoid data corruption during transmission.

9.4 USB 2.0 Interface

Is a 4-wire Mini USB slave interface that complies with USB 2.0.

The USB interface signals are VPAD-USB, USB-DP, USB-DM and GND.

USB interface features:

- 12Mbit/s full-speed transfer rate
- 5V typ compatible
- USB Softconnect feature
- Download feature is not supported by USB
- CDC 1.1 – ACM compliant

Table 9: Pin description of the USB interface

Signal	Mini USB Pin number	I/O	I/O type USB Standard	Description
VPAD-USB	1	I	VBUS	+5V USB Power Supply
USB-DM	2	I/O	D-	Differential data interface negative
USB-DP	3	I/O	D+	Differential data interface positive
ID	4	-	-	NC
GND	5	-	GND	Ground

9.5 General Purpose Input/Output

The IESM-IO+USB have 5 GPIOs available on the 16-Way IO Expander Socket. Which can be use for external applications, these are;

- GPIO19
- GPIO20
- GPIO23
- GPIO26
- GPIO27

These GPIOs can be controlled by AT commands:

- **AT+WIOW** for a write access to the GPIO value, when the GPIO is used as an output,
- **AT+WIOR** for a read access to the GPIO value, when the GPIO is used as an input.

Refer to "AT Commands Interface Guide" [7] for further information on AT commands.

After reset, both GPIOs are configured as inputs. The **AT+WIOM** command has to be used to change this configuration (refer to "AT Commands Interface Guide" 0 for further details).

Table 10: GPIO Information

Signal	16-Way IO Expander Pin number	I/O	Voltage	Reset State	Multiplex with
GPIO19	8	I/O	2V8	Z	Not mux
GPIO20	6	I/O	2V8	Undefined	Not mux
GPIO23	5	I/O	2V8	Z	Not mux
GPIO26	9	I/O	Open Drain	Z	SCL
GPIO27	7	I/O	Open Drain	Z	SDA

9.6 SPI Bus

SPI bus interfaces include:

- A CLK signal
- An I/O signal
- An I signal
- A CS signal complying with the standard SPI bus.

SPI bus characteristics:

- Master mode operation
- SPI speed is from 101.5 Kbit/s to 13 Mbit/s in master mode operation
- 3 or 4-wire interface
- SPI-mode configuration: 0 to 3
- 1 to 16 bits data length

Note: The SPI Bus is must run with Open AT[®]. Please consult Open AT Development Guide [7] for more information.

Table 11: AC characteristics

Signal	Description	Minimum	Typ	Maximum	Unit
CLK-cycle	SPI clock frequency	0.1015		13	MHz
Data-OUT delay	Data out ready delay time			10	ns
Data-IN-setup	Data in setup time	2			ns
Data-OUT-hold	Data out hold time	2			ns

9.6.1 SPI configuration

Table 12: SPI Configuration

Operation	Maximum Speed	SPI-Mode	Duplex	3-wire type	4-wire type
Master	13 Mb/s	0,1,2,3	Half	SPI1-CLK; SPI1-IO; ~SPI1-CS	SPI1-CLK; SPI1-IO; SPI1-I; ~SPI1-CS

Table 13: Pin description

Signal	Pin number	I/O	I/O type	Reset state	Description	Multiplexed with
SPI1-CLK	16	O	2V8	Z	SPI Serial Clock	GPIO28
SPI1-IO	18	I/O	2V8	Z	SPI Serial input/output	GPIO29
SPI1-I	17	I	2V8	Z	SPI Serial input	GPIO30
~SPI1-CS	15	O	2V8	Z	SPI Enable	GPIO31

9.7 Environmental Characteristics

The IESM-IO+USB is compliant with the following operating class. To ensure the proper operation of the IESM-IO+USB, the temperature of the environment must be within a specific range as described in the table below.

Table 14: Ranges of temperature

Conditions	Temperature range
Operating / Class A	-20°C to +55°C
Operating / Class B	-30°C to +65°C
Storage	-40°C to +85°C

Function Status Classification:

Class A:

The IESM-IO+USB remain fully functional across the specified temperature range.

Class B:

The IESM-IO+USB remain fully functional, across the specified temperature range. Some parameters may occasionally deviate from the specified requirements and this deviation does not affect the ability of the IESM-IO+USB to be fully functional.

The detailed climatic and mechanics standard environmental constraints applicable to the Fastrack Supreme are listed in the next table:

Table 15: Environmental standard constraints

Environmental Tests (IEC TR 60721-4)		Environmental Classes (IEC 60721-3)			
Tests	Standards	Storage (IEC 60721-3-1) Class IE13	Transportation (IEC 60721-3-2) Class IE23	Operation	
				Stationary (IEC 60721-3-3) Class IE35	Non-Stationary (IEC 60721-3-7) Class IE73
Cold	IEC 60068-2-1 : Ab/Ad	-25°C, 16 h	-40°C, 16 h	-5°C, 16 h	-5°C, 16 h
Dry heat	IEC 60068-2-2 : Bb/Bd	+70°C, 16 h	+70°C, 16 h	+55°C, 16 h	+55°C, 16 h
Change of temperature	IEC 60068-2-14 : Na/Nb	-33°C to ambient 2 cycles, t1=3 h 1 °C.min ⁻¹	-40°C to ambient 5 cycles, t1=3 h t2<3 min	-5°C to ambient 2 cycles, t1=3 h 0,5 °C.min ⁻¹	-5°C to ambient 5 cycles, t1=3 h t2<3 min
Damp heat	IEC 60068-2-56 : Cb	+30°C, 93% RH 96 h	+40°C, 93% RH 96 h minimum	+30°C, 93% RH, 96 h	+30°C, 93% RH, 96 h
Damp heat, cyclic	60068-2-30 : Db Variant 1 or 2	+40°C, 90% to 100% RH One cycle Variant 2	+55°C, 90% to 100% RH Two cycles Variant 2	+30°C, 90% to 100% RH Two cycles Variant 2	+40°C, 90% to 100% RH Two cycles Variant 1
Vibration (sinusoidal)	IEC 60068-2-6 : Fc	1-200 Hz 2 m.s ⁻² 0,75 mm 3 axes 10 sweep cycles	1-500 Hz 10 m.s ⁻² 3,5 mm 3 axes 10 sweep cycles	1-150 Hz 2 m.s ⁻² 0,75 mm 3 axes 5 sweep cycles	1-500 Hz 10 m.s ⁻² 3,5 mm 3 axes 10 sweep cycles
Vibration (random)	IEC 60068-2-64 : Fh	-	10-100 Hz / 1,0 m ² .s ⁻³ 100-200 Hz / -3 dB.octave ⁻¹ 200-2000 Hz / 0,5 m ² .s ⁻³ 3 axes 30 min	-	-
Shock (half-sine)	IEC 60068-2-27 : Ea	-	-	50 m.s ⁻² 6 ms 3 shocks 6 directions	150 m.s ⁻² 11 ms 3 shocks 6 directions
Bump	IEC 60068-2-29 : Eb	-	250 m.s ⁻² 6 ms 50 bumps vertical direction	-	-
Free fall	ISO 4180-2	-	Two falls in each specified attitude	-	2 falls in each specified attitude 0,025 m (<1kg)
Drop and topple	IEC 60068-2-31 : Ec	-	One drop on relevant corner One topple about each bottom edge	-	One drop on each relevant corner One topple on each of 4 bottom edges

Notes:

Short description of Class IE13 (For more information see standard IEC 60721-3-1)

"Locations without controlled temperature and humidity, where heating may be used to raise low temperatures, locations in buildings providing minimal protection against daily variations of external climate, prone to receiving rainfall from carrying wind".

Short description of Class IE23 (For more information, see standard IEC 60721-3-2)

"Transportation in unventilated compartments and in conditions without protection against bad weather, in all sorts of trucks and trailers in areas of well developed road network, in trains equipped with buffers specially designed to reduce shocks and by boat".

Short description of Class IE35 (For more information see standard IEC 60721-3-3)

"Locations with no control on heat or humidity where heating may be used to raise low temperatures, to places inside a building to avoid extremely high temperatures, to places such as hallways, building staircases, cellars, certain workshops, equipment stations without surveillance".

Short description of Class IE73 (For more information see standard IEC 60721-3-7)

"Transfer to places where neither temperature nor humidity are controlled but where heating may be used to raise low temperatures, to places exposed to water droplets, products can be subjected to ice formation, these conditions are found in hallways and building staircases, garages, certain workshops, factory building and places for industrial processes and hardware stations without surveillance".

9.8 Conformity

The complete product complies with the essential requirements of article 3 of R&TTE 1999/5/EC Directive and satisfied the following standards:

Table 16: Domains and applicable standards

Domain	Applicable standard
Safety standard	EN 60950 (ed.1999)
Efficient use of the radio frequency spectrum	EN 301 419-(v 4.1.1) EN 301 511 (V 7.0.1)
EMC	EN 301 489-1 (edition 2002) EN 301 489-7 (edition 2002)
Global Certification Forum – Certification Criteria	GCF-CC V3.13.0
FCC	FCC Part 15 FCC Part 22, 24
IC	RSS-132 Issue 2 RSS-133 Issue 3

10 Connector and Peripheral Devices References

10.1 General Purpose Connector References

GPC is a 50-pin plug connector with 0.5mm pitch from Kyocera Elco:

14 5078 050 515 861+



AVX

14-5078-050-515-86:

16 Way I/O Socket with 0.625mm pitch from Kyocera Elco:

20 9257 016 001 013 (IESM side)



AVX

20-9257-01-000S.pdf

16 Way I/O plug with 0.625mm pitch from Kyocera Elco:

58-9257-000-000-012S

More information is also available from;

<http://www.avxcorp.com/>

<http://www.molex.com/>

11 Safety Recommendations

11.1 General Safety

It is important to follow any special regulations regarding the use of radio equipment due in particular to the possibility of radio frequency (RF) interference. Please follow the safety advice given below carefully.

Switch OFF your Wireless CPU®:

- When in an aircraft. The use of cellular telephones in an aircraft may endanger the operation of the aircraft, disrupt the cellular network and is illegal. Failure to observe this instruction may lead to suspension or denial of cellular telephone services to the offender, or legal action or both,
- When at a refueling point,
- When in any area with a potentially explosive atmosphere which could cause an explosion or fire,
- In hospitals and any other place where medical equipment may be in use.

Respect restrictions on the use of radio equipment in:

- Fuel depots,
- Chemical plants,
- Places where blasting operations are in progress,
- Any other area where signalization reminds that the use of cellular telephone is forbidden or dangerous.
- Any other area where you would normally be advised to turn off your vehicle engine.

There may be a hazard associated with the operation of your Supreme Plug & Play close to inadequately protected personal medical devices such as hearing aids and pacemakers. Consult the manufacturers of the medical device to determine if it is adequately protected.

Operation of your Supreme Plug & Play close to other electronic equipment may also cause interference if the equipment is inadequately protected. Observe any warning signs and manufacturers' recommendations.

The Supreme Plug & Play is designed for and intended to be used in "**fixed**" and "**mobile**" applications:

- "**Fixed**" means that the device is physically secured at one location and is not able to be easily moved to another location.
- "**Mobile**" means that the device is designed to be used in other than fixed locations and generally in such a way that a separation distance of at least 20 cm (8 inches) is normally maintained between the transmitter's antenna and the body of the user or nearby persons.

The Supreme Plug & Play is not designed for and intended to be used in portable applications (within 20 cm or 8 inches of the body of the user) and such uses are strictly prohibited.

11.2 Vehicle Safety

Do not use your Supreme Plug & Play while driving, unless equipped with a correctly installed vehicle kit allowing 'Hands-Free' Operation.

Respect national regulations on the use of cellular telephones in vehicles. Road safety always comes first.

If incorrectly installed in a vehicle, the operation of Supreme Plug & Play telephone could interfere with the correct functioning of vehicle electronics. To avoid such problems, make sure that the installation has been performed by a qualified personnel. Verification of the protection of vehicle electronics should form part of the installation.

The use of an alert device to operate a vehicle's lights or horn on public roads is not permitted.

11.3 Care and Maintenance

Your Supreme Plug & Play is the product of advanced engineering, design and craftsmanship and should be treated with care. The suggestion below will help you to enjoy this product for many years.

Do not expose the Supreme Plug & Play to any extreme environment where the temperature or humidity is high.

Do not use or store the Supreme Plug & Play in dusty or dirty areas. Its moving parts (SIM holder for example) can be damaged.

Do not attempt to disassemble the Wireless CPU®. There are no user serviceable parts inside.

Do not expose the Supreme Plug & Play to water, rain or spilt beverages. It is not waterproof.

Do not abuse your Supreme Plug & Play by dropping, knocking, or violently shaking it. Rough handling can damage it.

Do not place the Supreme Plug & Play alongside computer discs, credit or travel cards or other magnetic media. The information contained on discs or cards may be affected by the Wireless CPU®.

The use of third party equipment or accessories, not made or authorized by Wavecom may invalidate the warranty of the Wireless CPU®.

Do contact an authorized Service Center in the unlikely event of a fault in the Wireless CPU®.

11.4 Your Responsibility

This Supreme Plug & Play is under your responsibility. Please treat it with care respecting all local regulations. It is not a toy. Therefore, keep it in a safe place at all times and out of the reach of children.

Try to remember your Unlock and PIN codes. Become familiar with and use the security features to block unauthorized use and theft.

12 Recommended Accessories

Accessories recommended by Wavecom for the IESM-IO+USB are given in the table below.

Table 17: List of recommended accessories


Designation	Part number	Supplier
16-Way IO Expander Plug	10-9257-01000S	AVX

13 Online Support

Wavecom provides an extensive range on online support which includes the following areas of Wavecom's wireless expertise:

- the latest version of this document
- new versions of our Operating System user guides
- comprehensive support for Open AT®
- regulatory certifications
- carrier certifications
- application notes

To gain access to this support, simply visit our web site at www.wavecom.com and click on "Support". Privileged access via user login is provided to Wavecom authorized distributors.

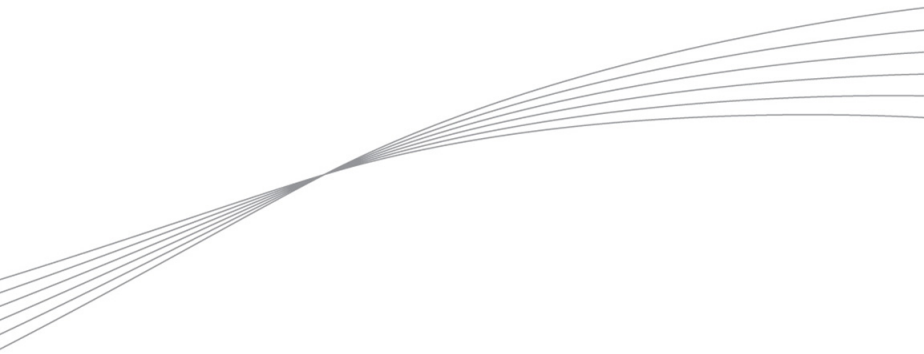

wavecom 

Make it wireless

WAVECOM S.A. - 3 esplanade du Foncet - 92442 Issy-les-Moulineaux Cedex - France - Tel: +33(0)1 46 29 08 00 - Fax: +33(0)1 46 29 08 08
Wavecom, Inc. - 430 Davis Drive - Suite 300 - Research Triangle Park, NC 27709 - USA - Tel: +1 919 237 4000 - Fax: +1 919 237 4140
WAVECOM Asia Pacific Ltd. - Unit 201-207, 2nd Floor - Bio-Informatics Centre - No. 2 Science Park West Avenue - Hong Kong Science Park,
Shatin - New Territories, Hong Kong - Tel: +852 2824 0254 - Fax: +852 2824 0255

www.wavecom.com