

SUB FRAME ISOMETRIC

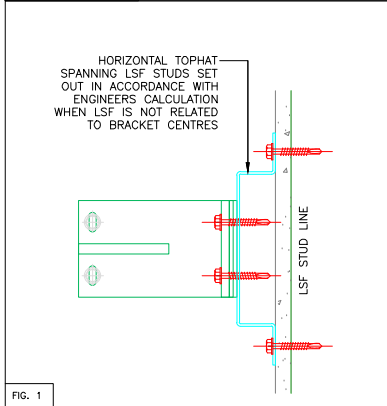


FIG. 1


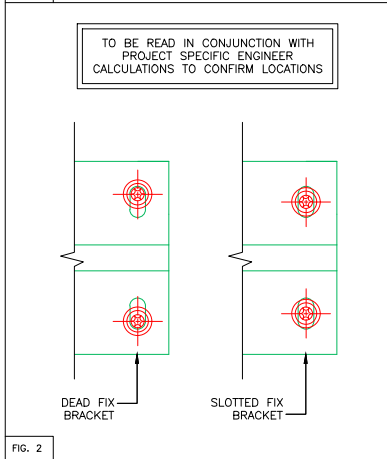


FIG. 2

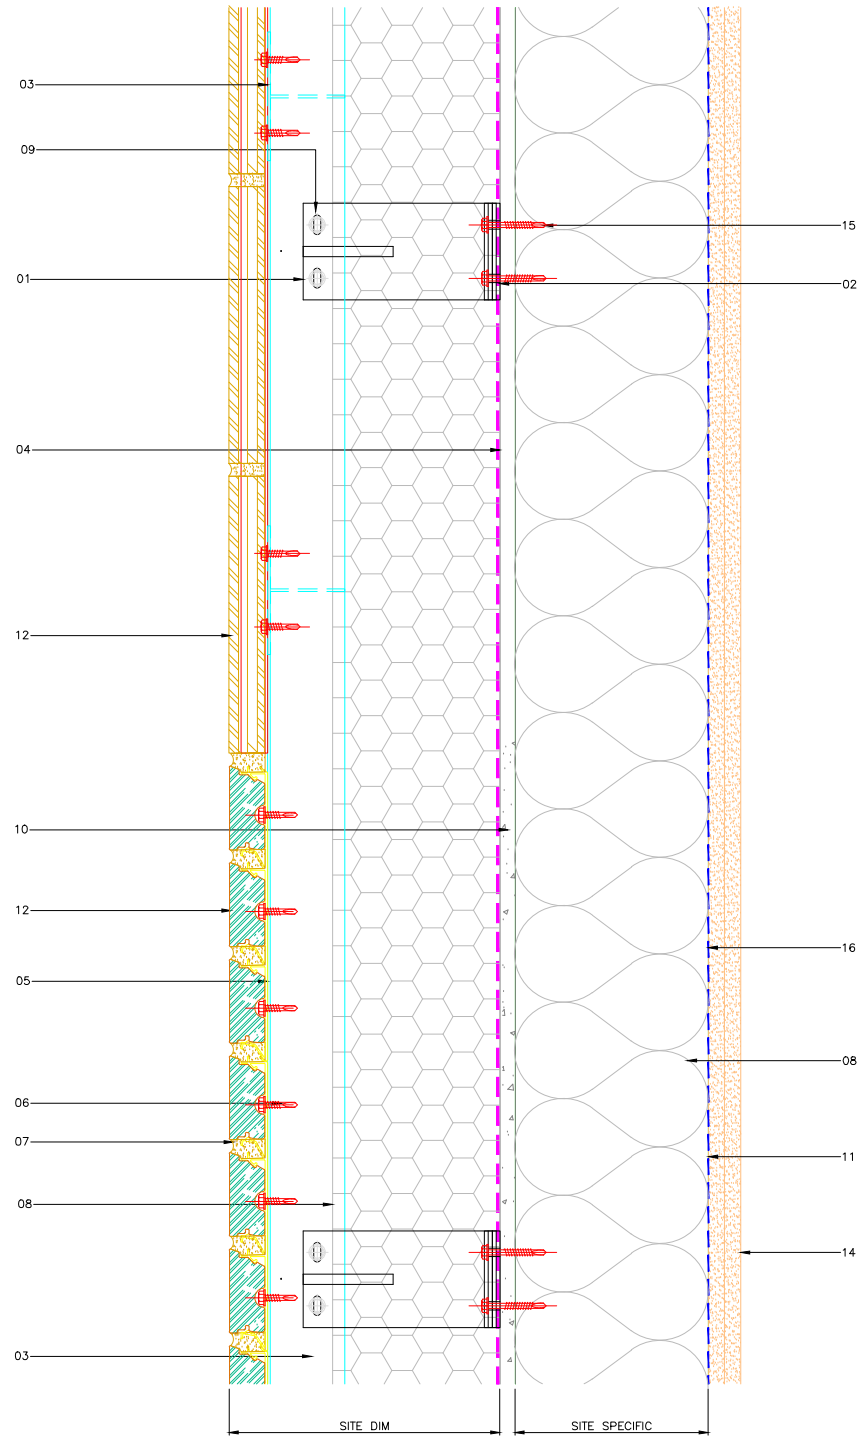

DETAIL LEGEND:		Site Location Plan:									
01	3mm THICK .75/150mm DEEP ALUMINIUM HELPING HAND BRACKET & BACKING PLATE FIXED TO STRUCTURE (SEE ALTERNATIVE FIXING DETAIL FIG 1), SETOUT IN ACCORDANCE WITH ENGINEERS CALCULATIONS DEAD FIX OR SLIDING BRACKET (FIG-2) LOCATIONS TBA BY ENGINEER AS PROJECT SPECIFIC	<p>General Notes:</p> <p>1. All details to be read in conjunction with H92 Specification and engineers project specific calculations.</p> <p>DRAWING DESIGN AND SPECIFICATION REMAINS THE PROPERTY OF GENERIX.</p> <table border="1"> <thead> <tr> <th>Rev</th> <th>By:</th> <th>Date:</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>.</td> <td>.</td> <td>00.00.00</td> <td>00.00.00</td> </tr> </tbody> </table> <p>Client:</p> <p>Project Name and Address: GENERIX GENERIX STANDARD DETAILS</p> <p>Drawing Title: GENERIX GENERIX HORIZONTAL JOINT DETAIL</p> <p>Drawn by</p> <p>Drawing Date</p> <p>Checked by</p> <p>Checked Date</p> <p>Scale</p> <p>Sheet</p> <p>Drawing Status</p> <p>Drawing Reference GENRIX-D-02</p>		Rev	By:	Date:	Description	.	.	00.00.00	00.00.00
Rev	By:			Date:	Description						
.	.			00.00.00	00.00.00						
02	THERMAL ISOLATION PAD										
03	2.2mm 125x60mm EXTRUDED 'T' OR 3mm 50x50mm 'L' RAIL MILL FINISHED AS STANDARD PPC IF REQUIRED <COLOUR / FINISH>										
04	BREATHER MEMBRANE, FIXED IN ACCORDANCE WITH MANUFACTURERS RECOMMENDATIONS										
05	GENERIX GENERIX EXTRUDED ALUMINIUM TRAY										
06	LOW PROFILE 5.5 TEK SCREW (STAINLESS STEEL)										
07	10mm MORTAR JOINT										
08	INSULATION AS PER PROJECT SPECIFICATION										
09	5.5 TEK SCREW (STAINLESS STEEL)										
10	CEMENT PARTICLE BOARD / CALCIUM SILICATE BOARD, FIXED IN ACCORDANCE WITH MANUFACTURERS RECOMMENDATIONS										
11	LIGHTWEIGHT STEEL FRAME SET OUT IN ACCORDANCE WITH ENGINEERS CALCULATION										
12	GENERIX GENERIX BRICK SLIP										
13	FLASHING										
14	INTERNAL FINISHES										
15	38x5.5mm STAINLESS STEEL TEK SCREWS OR SIMILAR APPROVED BY STRUCTURAL ENGINEER										
16	VAPOUR CONTROL LAYER FIXED IN ACCORDANCE WITH MANUFACTURERS RECOMMENDATIONS										
17	EPDM by OTHERS										
18	ALUMINIUM WINDOW POD OR REVEAL FLASHING										
19	WINDOW/ DOOR FIXING AND SEALING BY APPOINTED SUB-CONTRACTOR										
20	2mm CORNER SUPPORT ANGLE										
21	1mm VERMIN MESH										
22	COPING AND SUPPORT BRACKET										
23	LOW PROFILE RIVET										
24	PLYWOOD										
25	FIRE BARRIER										