

FINISHES / NOTES

BRICK SELECTION PROJECT SPECIFIC
FACTORY APPLIED
USING MECHANICAL FIXINGS

ALL SUPPORT BRACKETS PROJECT DEPENDENT
AUSTENITIC STAINLESS STEEL OR G275S POST
GALVANISED STEEL

PRE MIXED POINTING MORTAR TO JOINTS
VARIOUS COLOURS AVAILABLE

DOW CORNING 756 FOR POROUS
SUBSTRATES OR SIMILAR

KEY COMPONENT LEGEND

- (A) BRICK SLIP*
- (B) NORSKREEN® M4 SYSTEM
- (C) STAINLESS STEEL SUPPORT BRACKET
- (D) ALUMINIUM SUPPORT ANGLE
- (E) HYDRAULIC LIME POINTING - RECESSED JOINTS TYPICAL, OTHER OPTIONS AVAILABLE

(BO) INDICATIVE FINISHES NOT BY TELLING Eg :

JOINT SEALANTS/ BACKING ROD
COMPRIBAND JOINT BACKING
SOLID PACKERS / ISOLATION PADS
SUBSTRATE FIXINGS
INSULATION
BREATHER MEMBRANE
CEMENT PARTICLE / LINING BOARD
STEEL FRAMING SYSTEM
INTERNAL FINISHES
GLAZING SYSTEMS AND SEALS
CLOSURE TRIMS / FLASHINGS

* BRICK SLIPS CUT FROM REAL BRICK HAVE MINIMUM THICKNESS OF 25MM. EXTRUDED BRICK SLIPS HAVE A MINIMUM THICKNESS OF 15MM

Rev.	Date	By	Comments
------	------	----	----------

Drawing Status :

FOR INFORMATION

Material :

NORSKREEN® M4
F SERIES - WITH BRICK SLIPS
SUPPORT BRACKETS TO
CONCRETE



Telling Architectural Ltd
Unit 4E
Station Road
Four Ashes
Wolverhampton
WV10 7DB
Tel : 01902 797 700
Fax : 01902 797 720

© Telling Architectural Ltd
Do not scale from this drawing. If in doubt ask

Drawing Title :


**SYSTEM COMPONENTS AND
NOTES**

Scale :	Checked : RAC	Drawn : EJR
NTS	Date : 17/01/20	Date : 17/01/20

Size	Drawing No.	Rev.
A3	NOR-M4F-INDEX	



TellingArchitectural

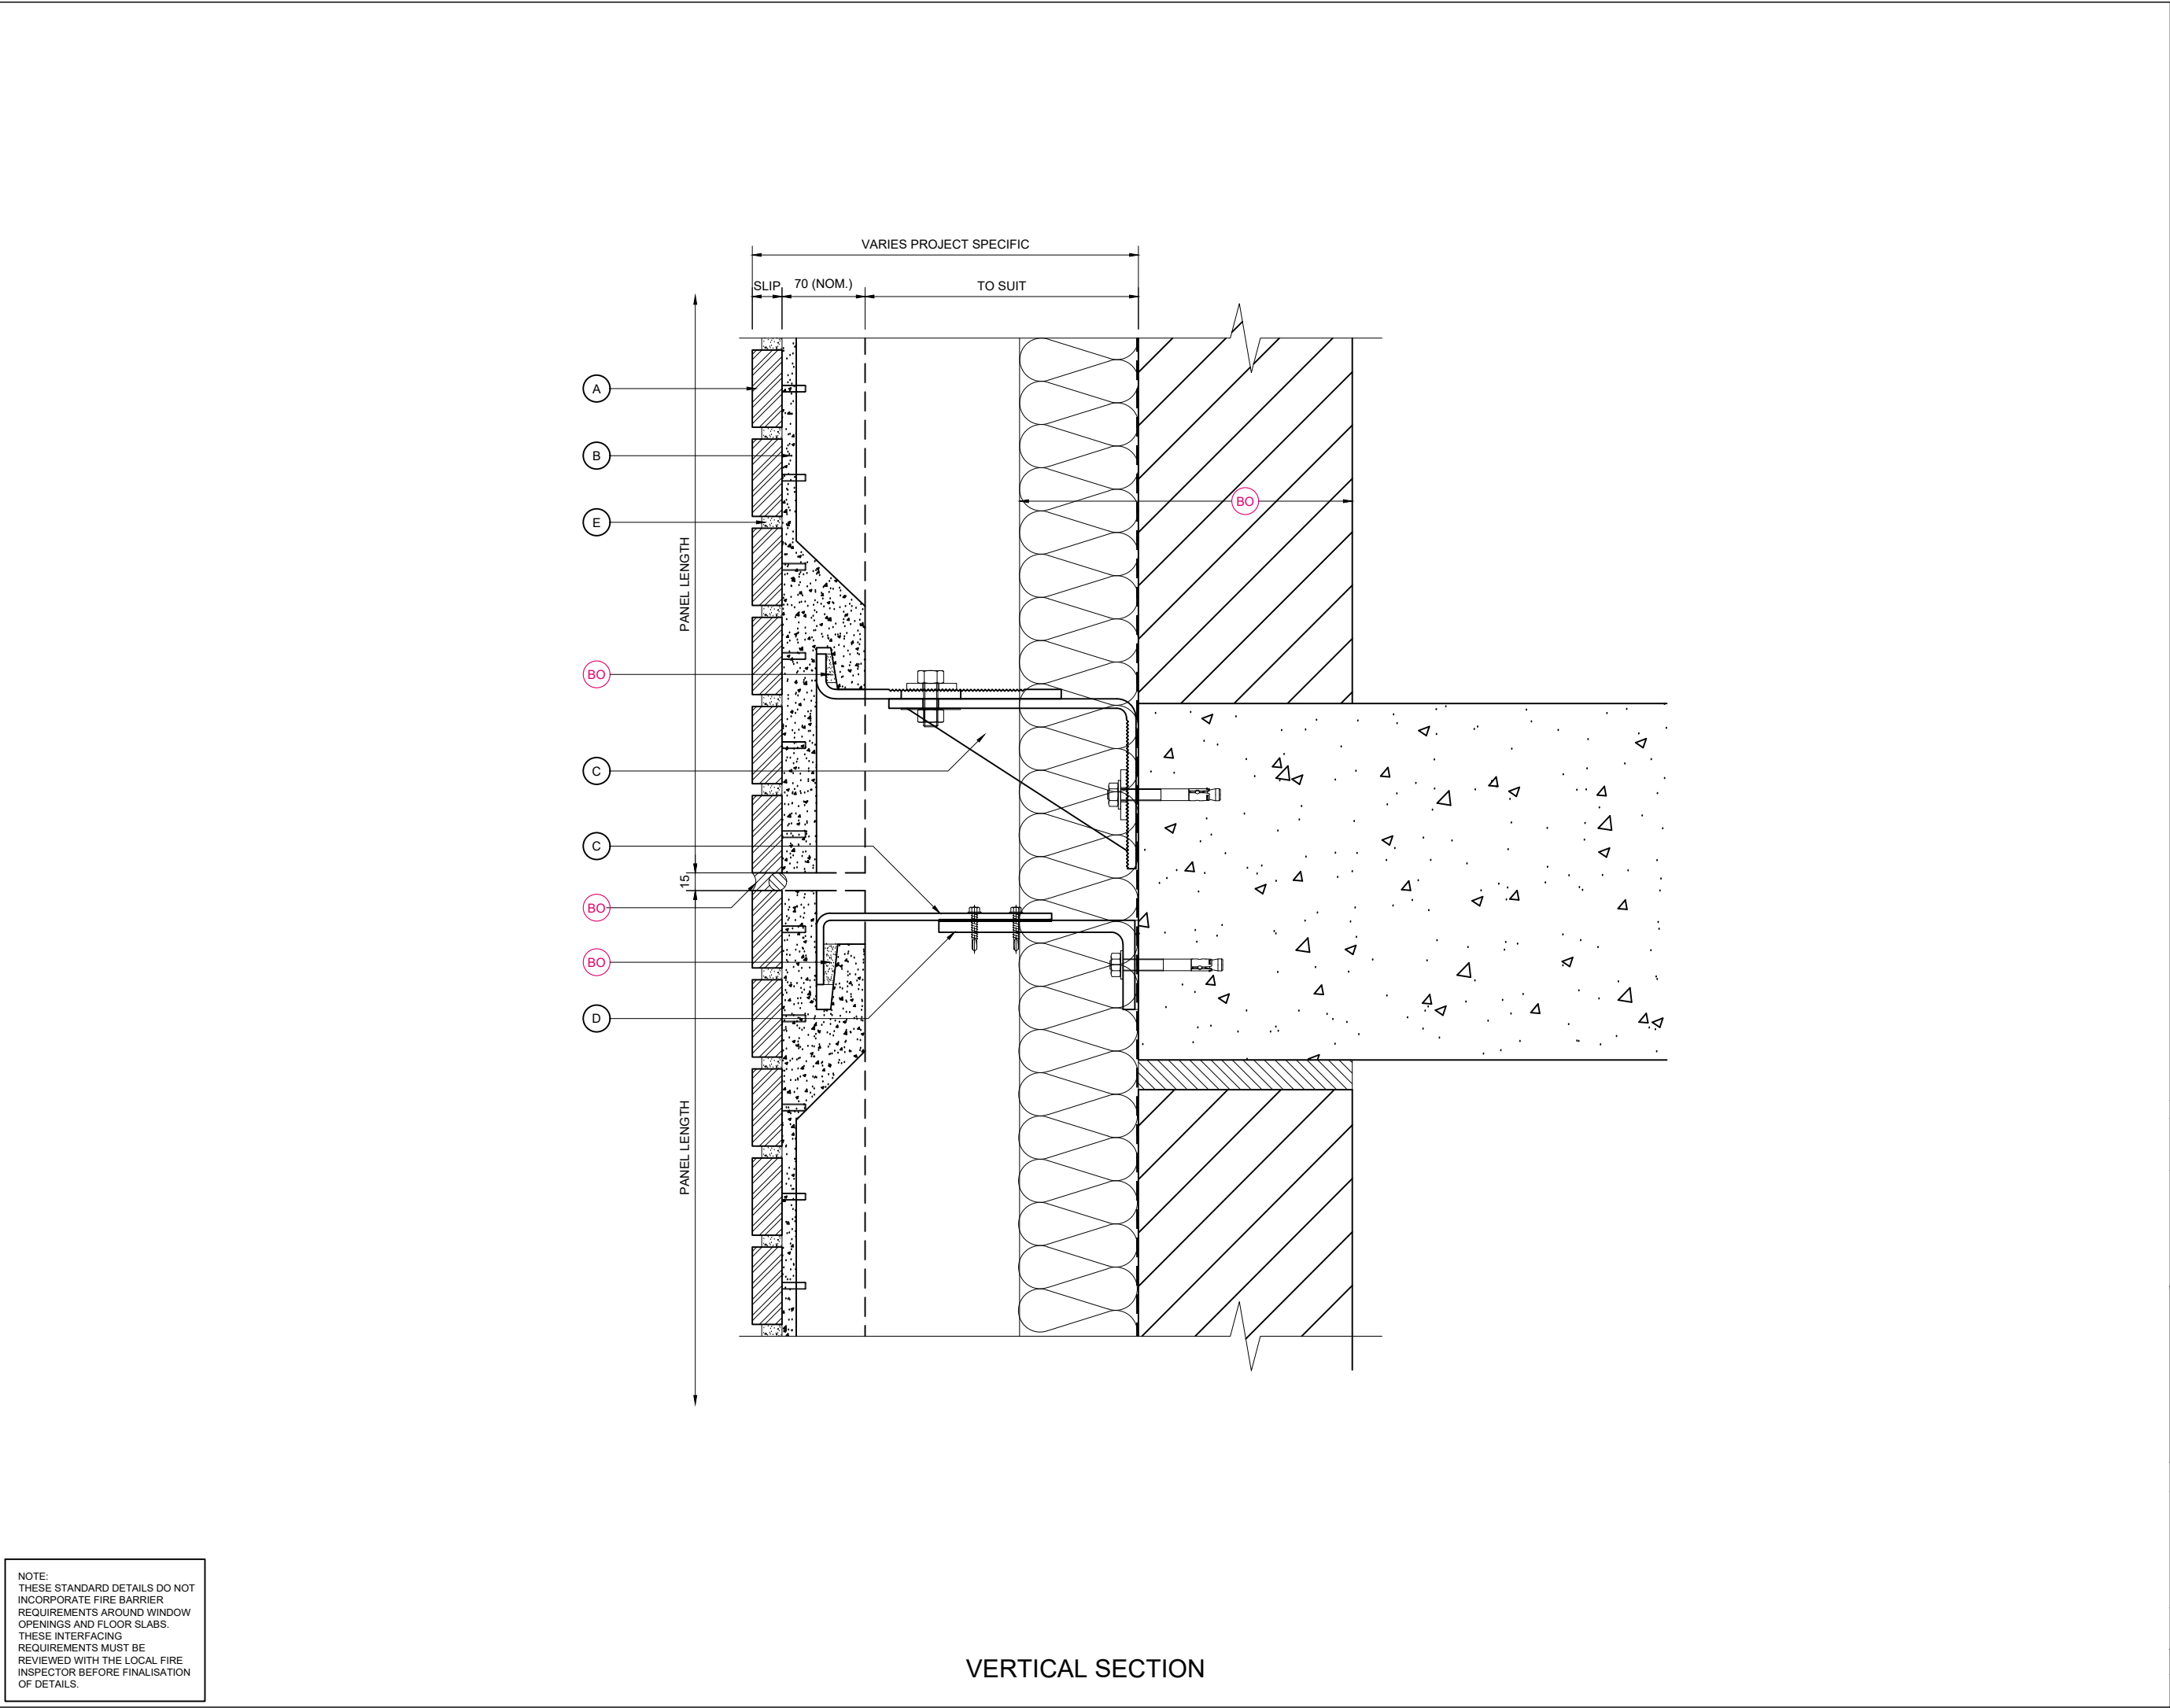

NOTE:
THESE STANDARD DETAILS DO NOT
INCORPORATE FIRE BARRIER
REQUIREMENTS AROUND WINDOW
OPENINGS AND FLOOR SLABS.
THESE INTERFACING
REQUIREMENTS MUST BE
REVIEWED WITH THE LOCAL FIRE
INSPECTOR BEFORE FINALISATION
OF DETAILS.

KEY COMPONENT LEGEND

A

BRICK SLIP*

B

NORSKREEN® M4 SYSTEM

C

STAINLESS STEEL SUPPORT BRACKET

D

ALUMINIUM SUPPORT ANGLE

E

HYDRAULIC LIME POINTING - RECESSED JOINTS TYPICAL, OTHER OPTIONS AVAILABLE

BO

INDICATIVE FINISHES NOT BY TELLING Eg :

JOINT SEALANTS/ BACKING ROD

COMPRIBAND JOINT BACKING

SOLID PACKERS / ISOLATION PADS

SUBSTRATE FIXINGS

INSULATION

BREATHER MEMBRANE

CEMENT PARTICLE / LINING BOARD

STEEL FRAMING SYSTEM

INTERNAL FINISHES

GLAZING SYSTEMS AND SEALS

CLOSURE TRIMS / FLASHINGS

* BRICK SLIPS CUT FROM REAL BRICK HAVE MINIMUM THICKNESS OF 25MM. EXTRUDED BRICK SLIPS HAVE A MINIMUM THICKNESS OF 15MM

FOR INFORMATION

Material :

NORSKREEN® M4
F SERIES - WITH BRICK SLIPS
SUPPORT BRACKETS TO
CONCRETE


Telling Architectural

Telling Architectural Ltd
Unit 4E
Station Road
Four Ashes
Wolverhampton
WV10 7DB

Tel : 01902 797 700
Fax : 01902 797 720

© Telling Architectural Ltd
Do not scale from this drawing. If in doubt askDrawing Title :

VERTICAL SECTION
THROUGH SLAB EDGE

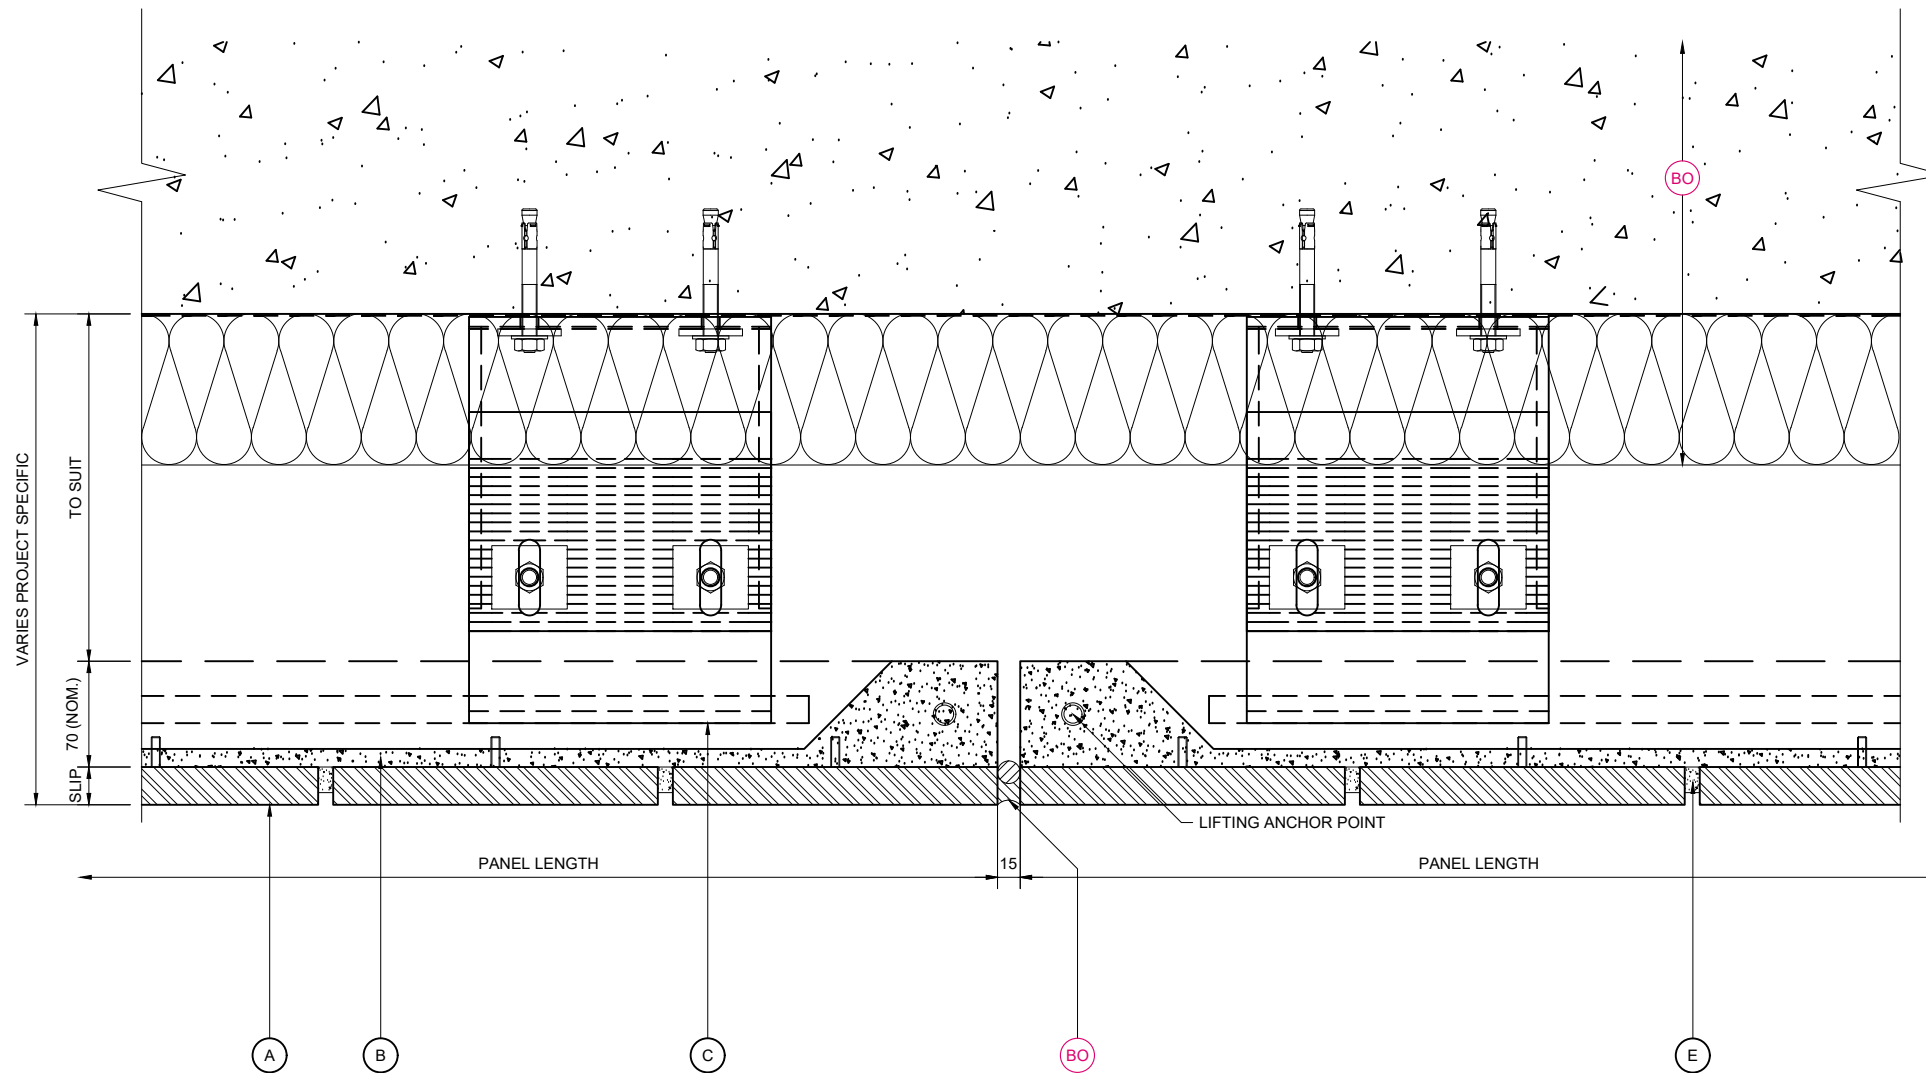

HORIZONTAL SECTION

NOTE:
THESE STANDARD DETAILS DO NOT
INCORPORATE FIRE BARRIER
REQUIREMENTS AROUND WINDOW
OPENINGS AND FLOOR SLABS.
THESE INTERFACING
REQUIREMENTS MUST BE
REVIEWED WITH THE LOCAL FIRE
INSPECTOR BEFORE FINALISATION
OF DETAILS.

KEY COMPONENT LEGEND

- (A) BRICK SLIP*
- (B) NORSKREEN® M4 SYSTEM
- (C) STAINLESS STEEL SUPPORT BRACKET
- (D) ALUMINIUM SUPPORT ANGLE
- (E) HYDRAULIC LIME POINTING - RECESSED JOINTS TYPICAL, OTHER OPTIONS AVAILABLE

(BO) INDICATIVE FINISHES NOT BY TELLING Eg :

- JOINT SEALANTS/ BACKING ROD
- COMPRIBAND JOINT BACKING
- SOLID PACKERS / ISOLATION PADS
- SUBSTRATE FIXINGS
- INSULATION
- BREATHER MEMBRANE
- CEMENT PARTICLE / LINING BOARD
- STEEL FRAMING SYSTEM
- INTERNAL FINISHES
- GLAZING SYSTEMS AND SEALS
- CLOSURE TRIMS / FLASHINGS

* BRICK SLIPS CUT FROM REAL BRICK HAVE MINIMUM THICKNESS OF 25MM. EXTRUDED BRICK SLIPS HAVE A MINIMUM THICKNESS OF 15MM

Rev.	Date	By	Comments
------	------	----	----------

Drawing Status :

FOR INFORMATION

Material :

NORSKREEN® M4
F SERIES - WITH BRICK
SLIPS SUPPORT BRACKETS
TO CONCRETE



Telling Architectural Ltd
Unit 4E
Station Road
Four Ashes
Wolverhampton
WV10 7DB
Tel : 01902 797 700
Fax : 01902 797 720


© Telling Architectural Ltd
Do not scale from this drawing. If in doubt ask

Drawing Title :

HORIZONTAL SECTION
THROUGH SLAB EDGE /
BASE BRACKETS

Scale :	Checked : RAC	Drawn : EJR
1 : 5	Date : 17/01/20	Date : 17/01/20

Size	Drawing No.	Rev.
A3	NOR-M4F-D02	

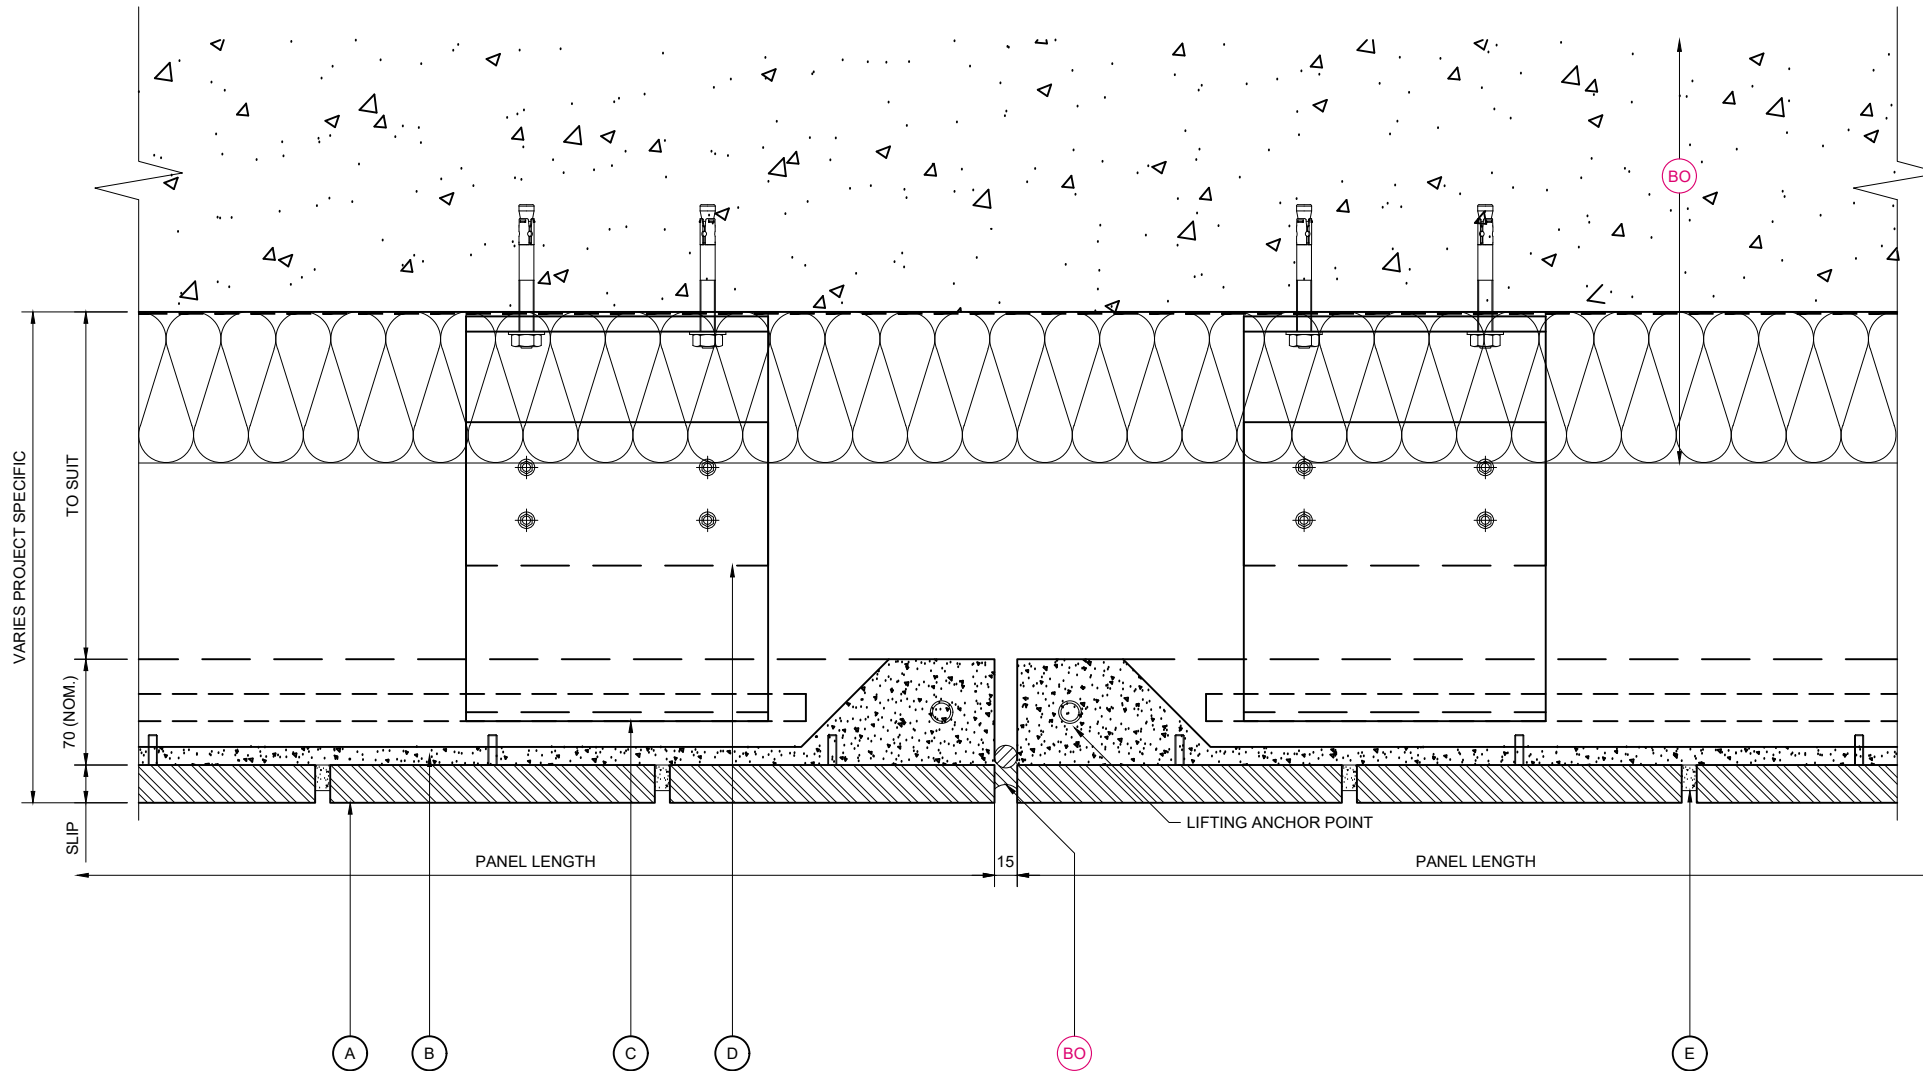

HORIZONTAL SECTION

NOTE:
THESE STANDARD DETAILS DO NOT
INCORPORATE FIRE BARRIER
REQUIREMENTS AROUND WINDOW
OPENINGS AND FLOOR SLABS.
THESE INTERFACING
REQUIREMENTS MUST BE
REVIEWED WITH THE LOCAL FIRE
INSPECTOR BEFORE FINALISATION
OF DETAILS.

KEY COMPONENT LEGEND

- A BRICK SLIP*
- B NORSKREEN® M4 SYSTEM
- C STAINLESS STEEL SUPPORT BRACKET
- D ALUMINIUM SUPPORT ANGLE
- E HYDRAULIC LIME POINTING - RECESSED JOINTS TYPICAL, OTHER OPTIONS AVAILABLE

BO INDICATIVE FINISHES NOT BY TELLING Eg :

- JOINT SEALANTS/ BACKING ROD
- COMPRIBAND JOINT BACKING
- SOLID PACKERS / ISOLATION PADS
- SUBSTRATE FIXINGS
- INSULATION
- BREATHER MEMBRANE
- CEMENT PARTICLE / LINING BOARD
- STEEL FRAMING SYSTEM
- INTERNAL FINISHES
- GLAZING SYSTEMS AND SEALS
- CLOSURE TRIMS / FLASHINGS

* BRICK SLIPS CUT FROM REAL BRICK HAVE MINIMUM THICKNESS OF 25MM. EXTRUDED BRICK SLIPS HAVE A MINIMUM THICKNESS OF 15MM

Rev.	Date	By	Comments
------	------	----	----------

Drawing Status :

FOR INFORMATION

Material :

NORSKREEN® M4
F SERIES - WITH BRICK
SLIPS SUPPORT BRACKETS
TO CONCRETE



Telling Architectural Ltd
Unit 4E
Station Road
Four Ashes
Wolverhampton
WV10 7DB
Tel : 01902 797 700
Fax : 01902 797 720


© Telling Architectural Ltd
Do not scale from this drawing. If in doubt ask

Drawing Title :

HORIZONTAL SECTION
THROUGH SLAB EDGE / TOP
RESTRAINTS

Scale :	Checked :	Drawn :
1 : 5	Date :	Date :

Size	Drawing No.	Rev.
A3	NOR-M4F-D03	

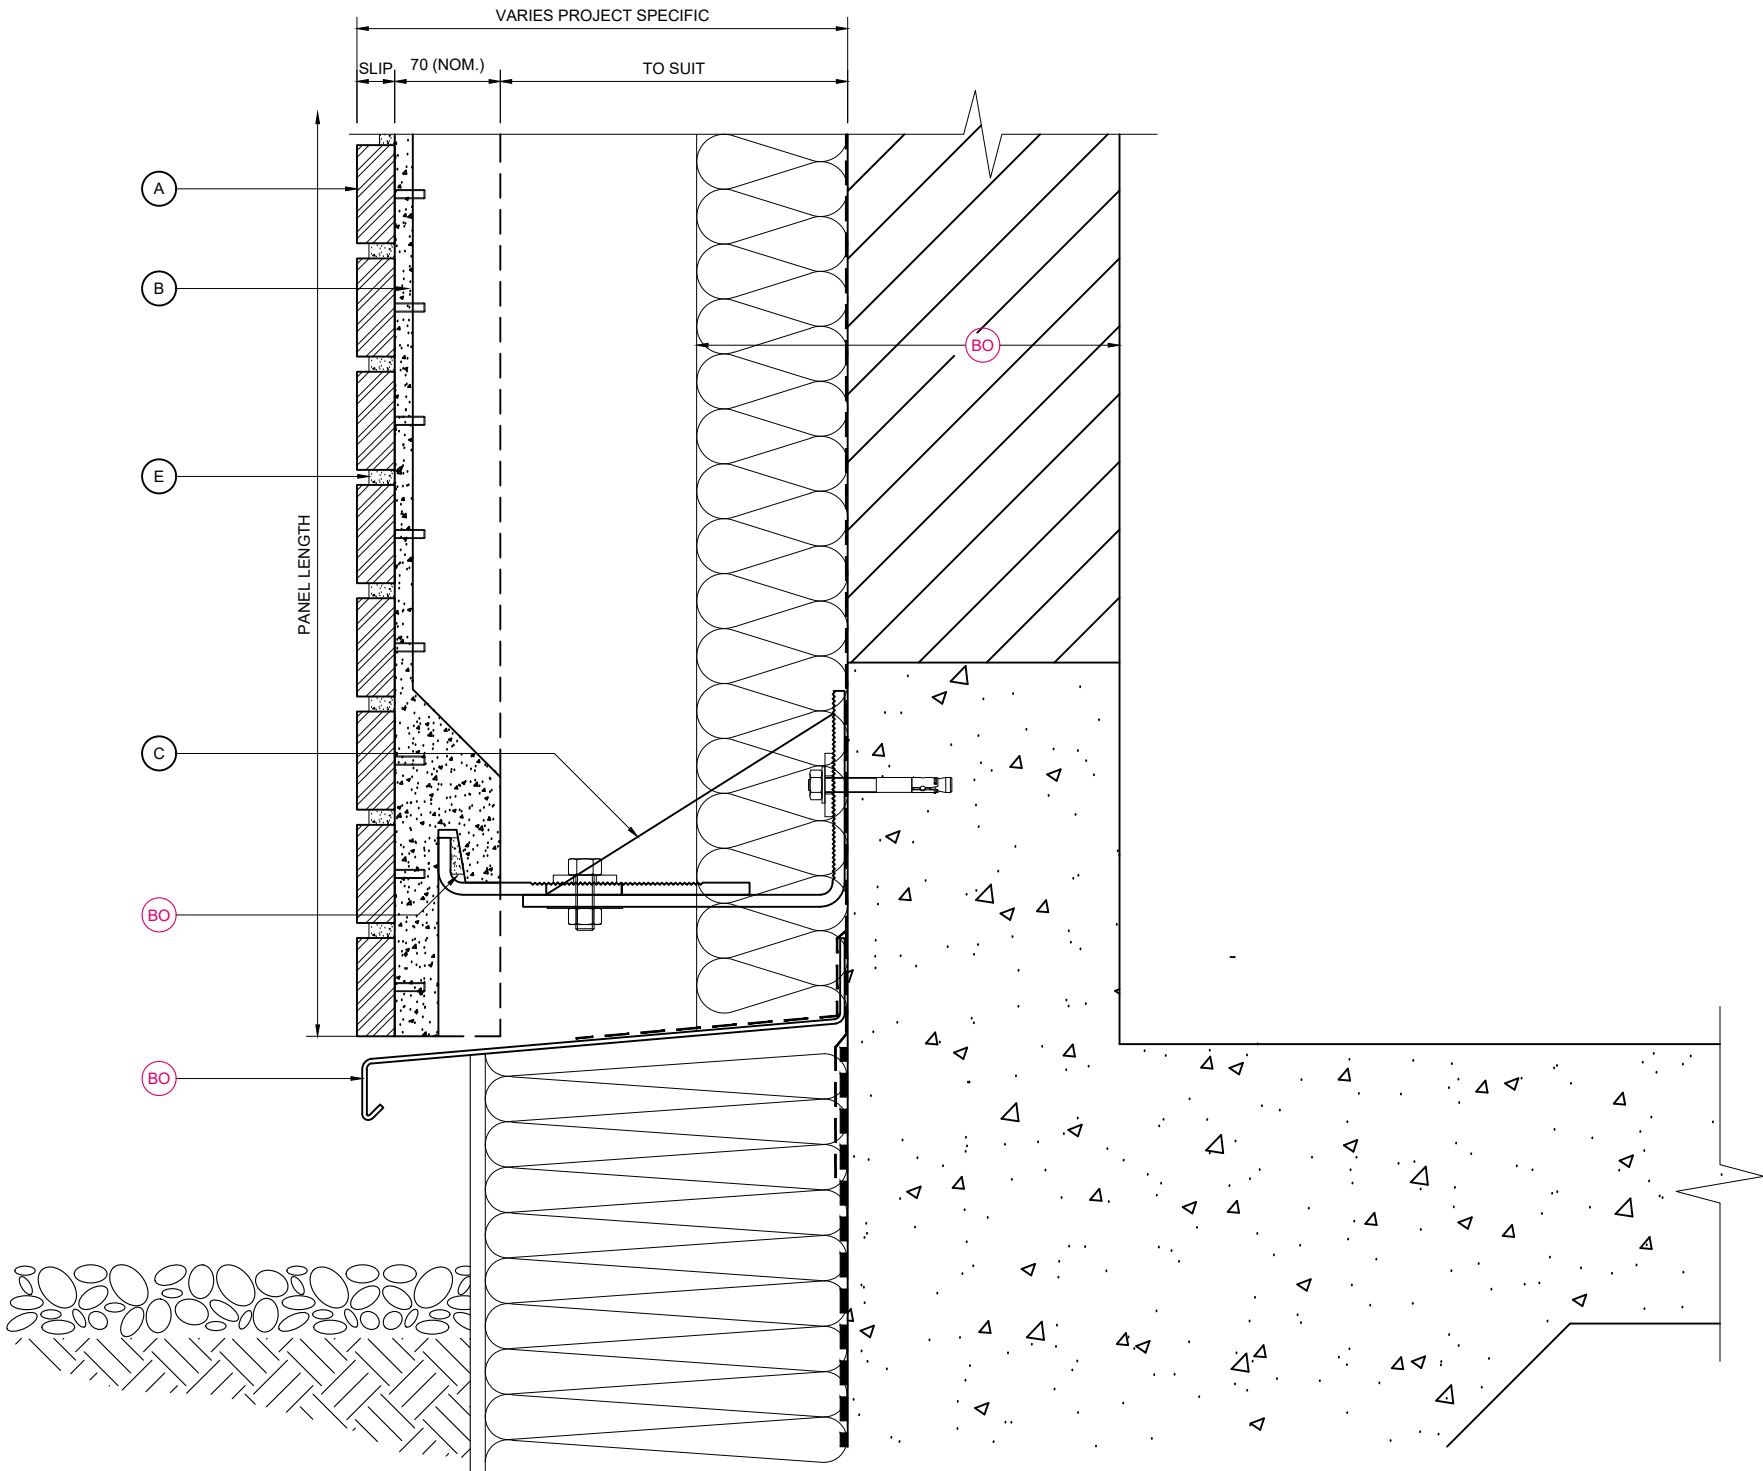

BASE DETAIL

KEY COMPONENT LEGEND

- A BRICK SLIP*
- B NORSKREEN® M4 SYSTEM
- C STAINLESS STEEL SUPPORT BRACKET
- D ALUMINIUM SUPPORT ANGLE
- E HYDRAULIC LIME POINTING - RECESSED JOINTS TYPICAL, OTHER OPTIONS AVAILABLE

BO INDICATIVE FINISHES NOT BY TELLING Eg :

- JOINT SEALANTS/ BACKING ROD
- COMPRIBAND JOINT BACKING
- SOLID PACKERS / ISOLATION PADS
- SUBSTRATE FIXINGS
- INSULATION
- BREATHER MEMBRANE
- CEMENT PARTICLE / LINING BOARD
- STEEL FRAMING SYSTEM
- INTERNAL FINISHES
- GLAZING SYSTEMS AND SEALS
- CLOSURE TRIMS / FLASHINGS

* BRICK SLIPS CUT FROM REAL BRICK HAVE MINIMUM THICKNESS OF 25MM. EXTRUDED BRICK SLIPS HAVE A MINIMUM THICKNESS OF 15MM

Rev.	Date	By	Comments
------	------	----	----------

Drawing Status :

FOR INFORMATION

Material :

NORSKREEN® M4
F SERIES - WITH BRICK
SLIPS SUPPORT BRACKETS
TO CONCRETE

 Telling Architectural

Telling Architectural Ltd
Unit 4E
Station Road
Four Ashes
Wolverhampton
WV10 7DB

Tel : 01902 797 700
Fax : 01902 797 720


© Telling Architectural Ltd
Do not scale from this drawing. If in doubt ask

Drawing Title :

BASE DETAIL

Scale :	Checked : RAC	Drawn : EJR
1 : 5	Date : 17/01/20	Date : 17/01/20

Size	Drawing No.	Rev.
A3	NOR-M4F-D04	

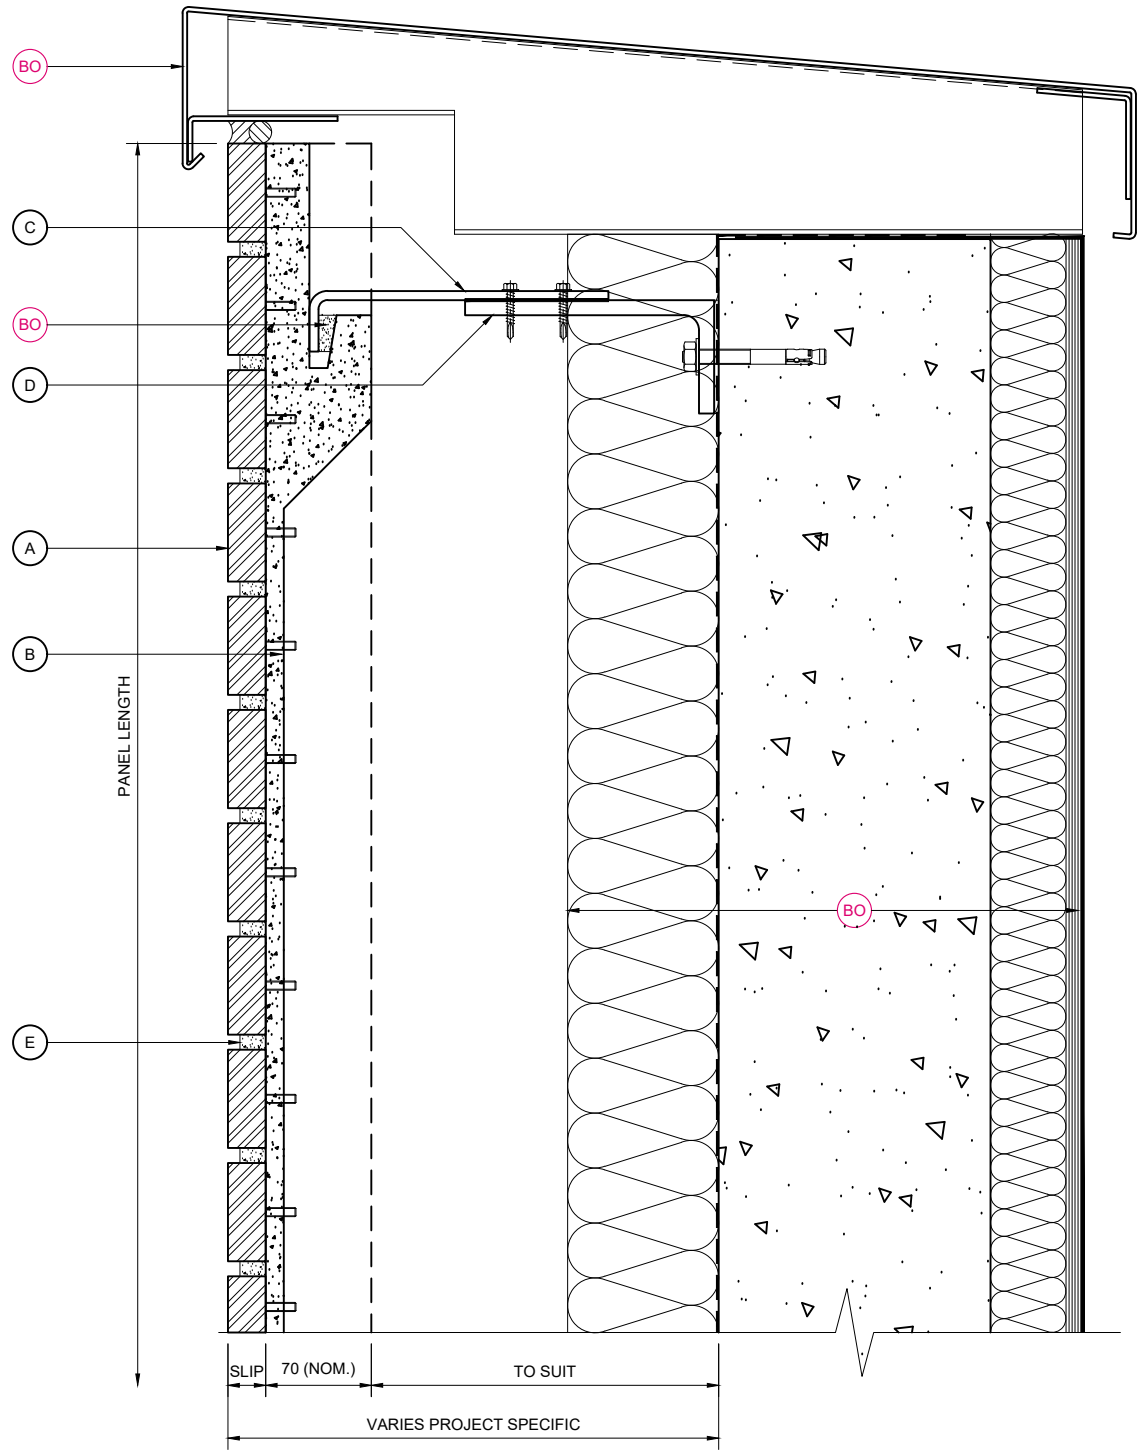

PARAPET DETAIL

NOTE:
THESE STANDARD DETAILS DO NOT
INCORPORATE FIRE BARRIER
REQUIREMENTS AROUND WINDOW
OPENINGS AND FLOOR SLABS.
THESE INTERFACING
REQUIREMENTS MUST BE
REVIEWED WITH THE LOCAL FIRE
INSPECTOR BEFORE FINALISATION
OF DETAILS.

KEY COMPONENT LEGEND

- A BRICK SLIP*
- B NORSKREEN® M4 SYSTEM
- C STAINLESS STEEL SUPPORT BRACKET
- D ALUMINIUM SUPPORT ANGLE
- E HYDRAULIC LIME POINTING - RECESSED JOINTS TYPICAL, OTHER OPTIONS AVAILABLE

BO INDICATIVE FINISHES NOT BY TELLING Eg :

- JOINT SEALANTS/ BACKING ROD
- COMPRIBAND JOINT BACKING
- SOLID PACKERS / ISOLATION PADS
- SUBSTRATE FIXINGS
- INSULATION
- BREATHER MEMBRANE
- CEMENT PARTICLE / LINING BOARD
- STEEL FRAMING SYSTEM
- INTERNAL FINISHES
- GLAZING SYSTEMS AND SEALS
- CLOSURE TRIMS / FLASHINGS

* BRICK SLIPS CUT FROM REAL BRICK HAVE MINIMUM THICKNESS OF 25MM. EXTRUDED BRICK SLIPS HAVE A MINIMUM THICKNESS OF 15MM

Rev.	Date	By	Comments
------	------	----	----------

Drawing Status :

FOR INFORMATION

Material :

NORSKREEN® M4
F SERIES - WITH BRICK
SLIPS SUPPORT BRACKETS
TO CONCRETE



Telling Architectural Ltd
Unit 4E
Station Road
Four Ashes
Wolverhampton
WV10 7DB

Tel : 01902 797 700
Fax : 01902 797 720


© Telling Architectural Ltd
Do not scale from this drawing. If in doubt ask

Drawing Title :

PARAPET DETAIL

Scale :	Checked : RAC	Drawn : EJR
1 : 5	Date : 17/01/20	Date : 17/01/20

Size	Drawing No.	Rev.
A3	NOR-M4F-D05	

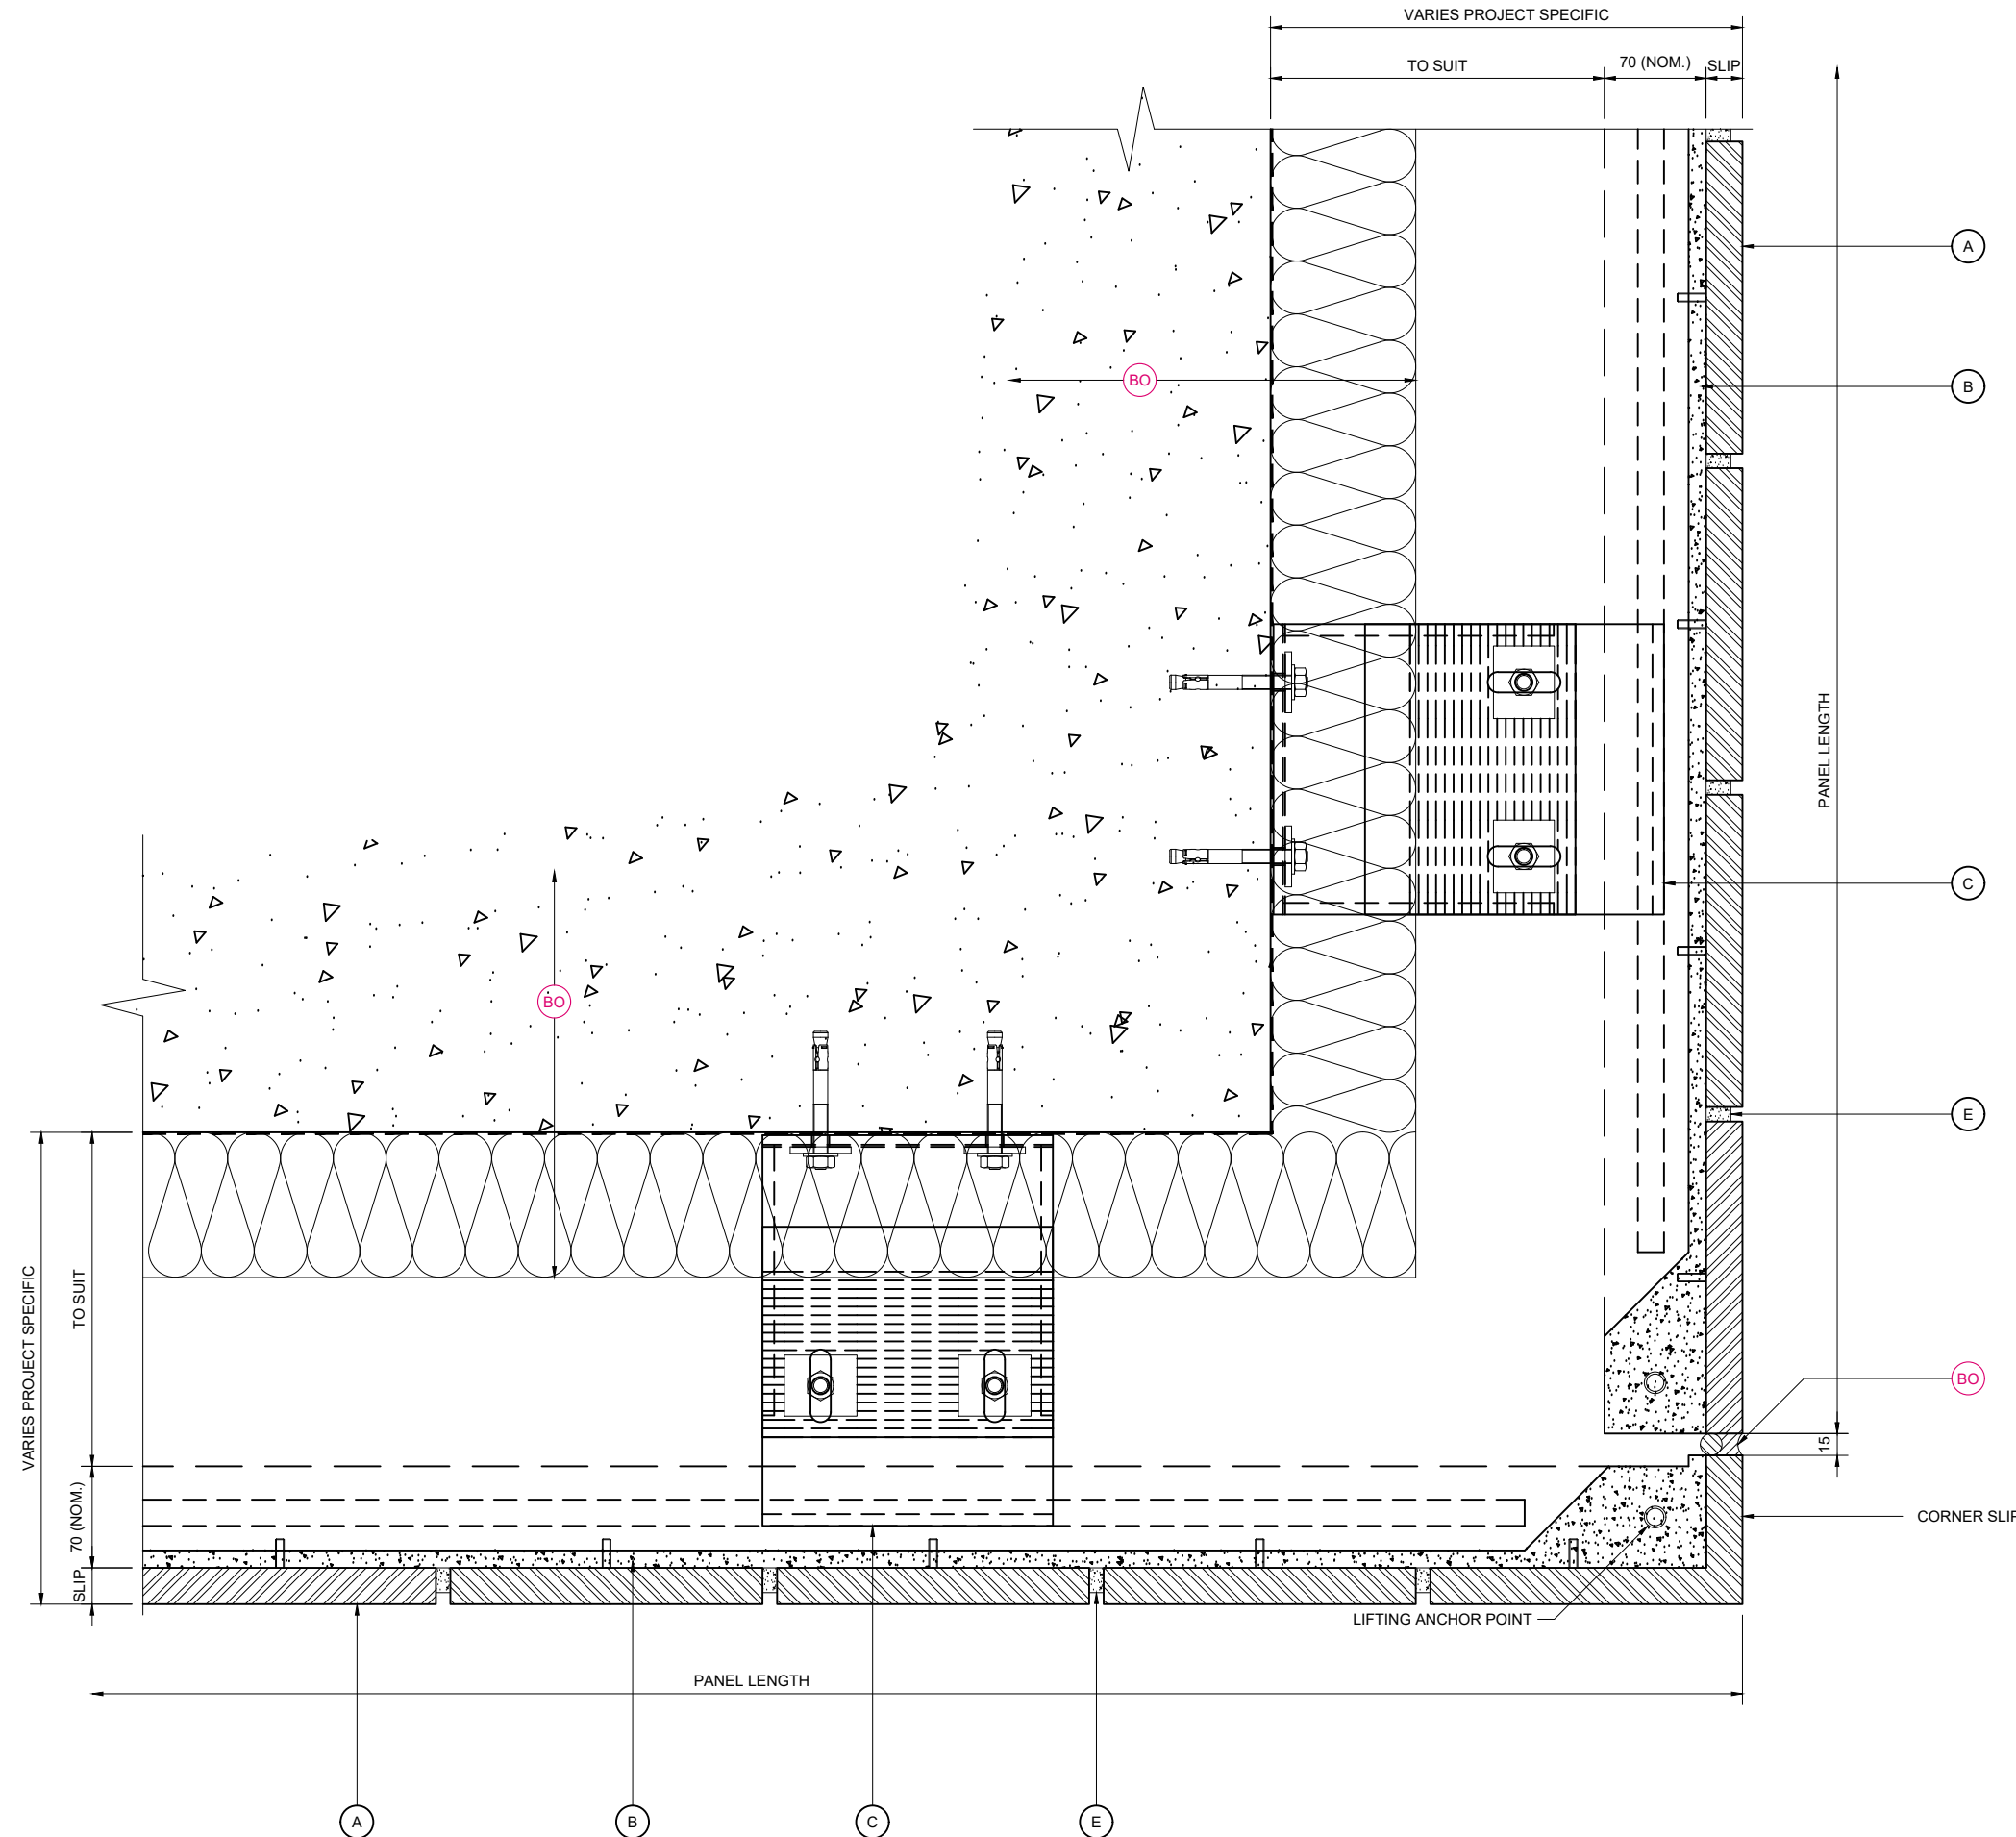

NOTE:
THESE STANDARD DETAILS DO NOT
INCORPORATE FIRE BARRIER
REQUIREMENTS AROUND WINDOW
OPENINGS AND FLOOR SLABS.
THESE INTERFACING
REQUIREMENTS MUST BE
REVIEWED WITH THE LOCAL FIRE
INSPECTOR BEFORE FINALISATION
OF DETAILS.

EXTERNAL CORNER DETAIL

SEE NOR-M4F-D15 / 16 FOR CORNER PANEL OPTION

KEY COMPONENT LEGEND

- A BRICK SLIP*
- B NORSKREEN® M4 SYSTEM
- C STAINLESS STEEL SUPPORT BRACKET
- D ALUMINIUM SUPPORT ANGLE
- E HYDRAULIC LIME POINTING - RECESSED JOINTS TYPICAL, OTHER OPTIONS AVAILABLE

BO INDICATIVE FINISHES NOT BY TELLING Eg :

- JOINT SEALANTS/ BACKING ROD
- COMPRIBAND JOINT BACKING
- SOLID PACKERS / ISOLATION PADS
- SUBSTRATE FIXINGS
- INSULATION
- BREATHER MEMBRANE
- CEMENT PARTICLE / LINING BOARD
- STEEL FRAMING SYSTEM
- INTERNAL FINISHES
- GLAZING SYSTEMS AND SEALS
- CLOSURE TRIMS / FLASHINGS

* BRICK SLIPS CUT FROM REAL BRICK HAVE MINIMUM THICKNESS OF 25MM. EXTRUDED BRICK SLIPS HAVE A MINIMUM THICKNESS OF 15MM

Rev.	Date	By	Comments
Drawing Status :			

FOR INFORMATION

Material :

NORSKREEN® M4
F SERIES - WITH BRICK
SLIPS SUPPORT BRACKETS
TO CONCRETE


Telling Architectural Ltd
Unit 4E
Station Road
Four Ashes
Wolverhampton
WV10 7DB

Tel : 01902 797 700
Fax : 01902 797 720

© Telling Architectural Ltd
Do not scale from this drawing. If in doubt ask

Drawing Title :		
EXTERNAL CORNER DETAIL / BASE BRACKETS		
Scale :	Checked : RAC	Drawn : EJR
1 : 5	Date : 17/01/20	Date : 17/01/20

Size	Drawing No.	Rev.
A3	NOR-M4F-D06	

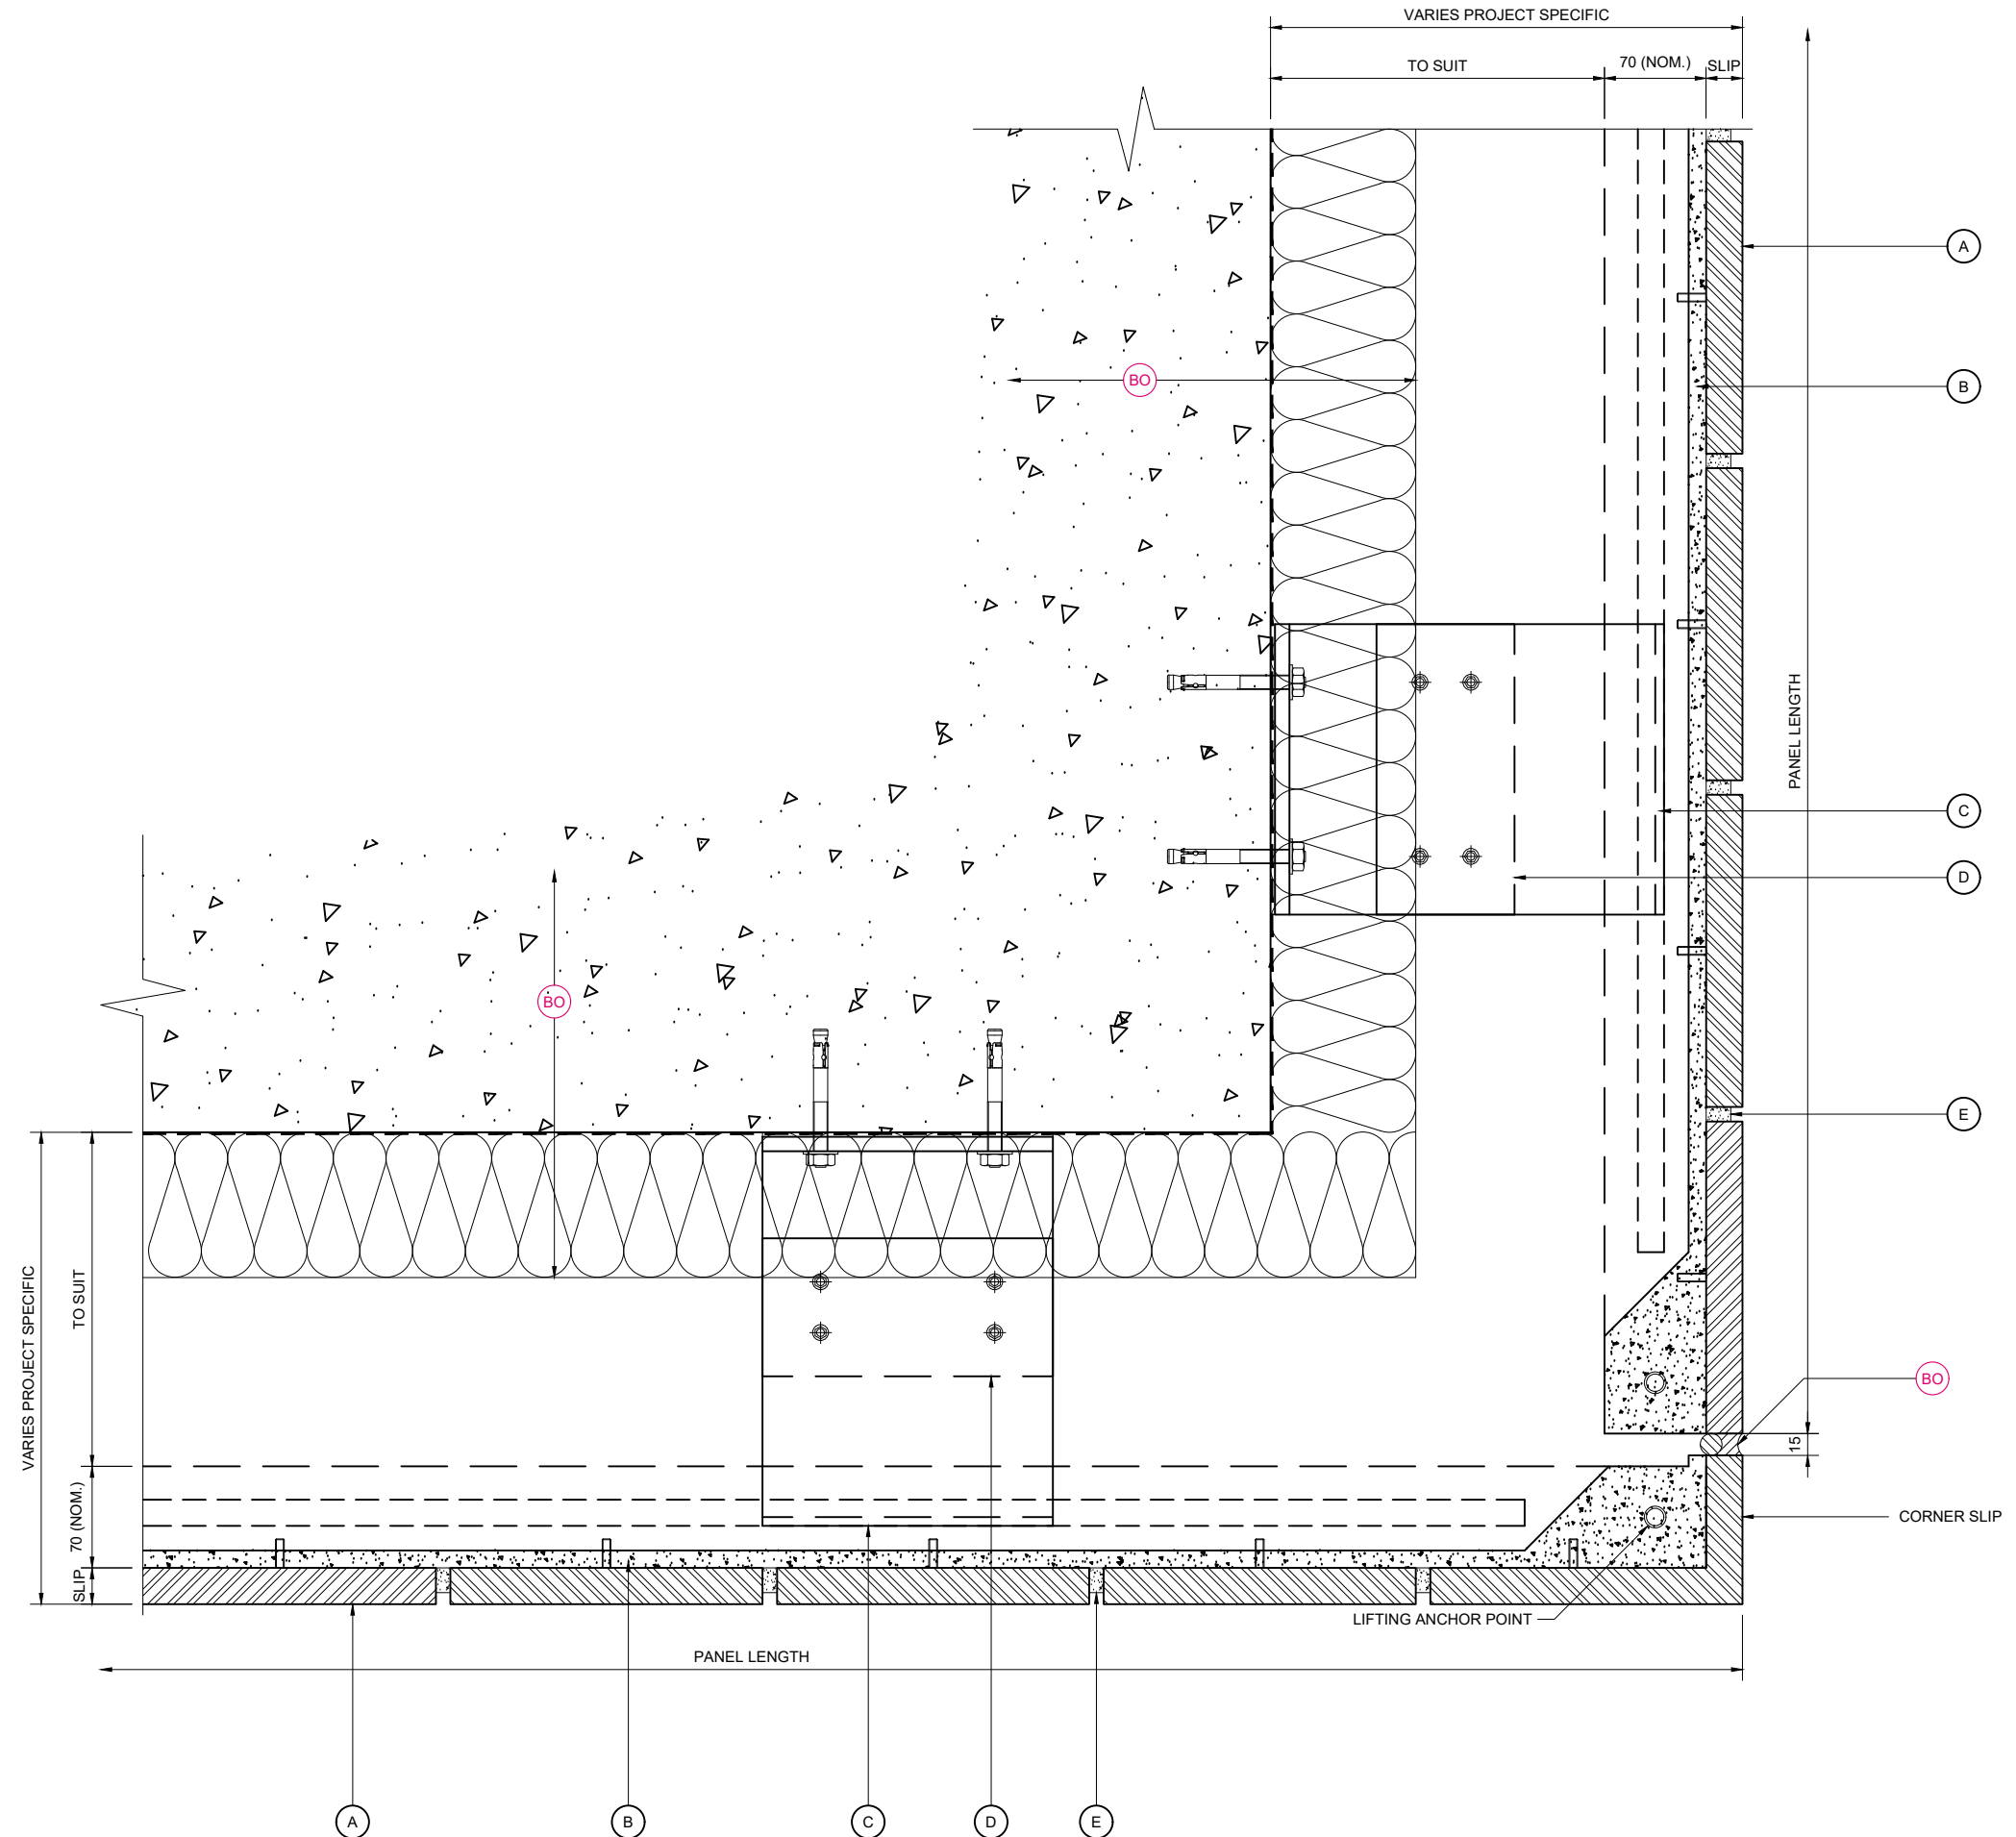

NOTE:
THESE STANDARD DETAILS DO NOT
INCORPORATE FIRE BARRIER
REQUIREMENTS AROUND WINDOW
OPENINGS AND FLOOR SLABS.
THESE INTERFACING
REQUIREMENTS MUST BE
REVIEWED WITH THE LOCAL FIRE
INSPECTOR BEFORE FINALISATION
OF DETAILS.

EXTERNAL CORNER DETAIL

SEE NOR-M4F-D15 / 16 FOR CORNER PANEL OPTION

KEY COMPONENT LEGEND

- A BRICK SLIP*
- B NORSKREEN® M4 SYSTEM
- C STAINLESS STEEL SUPPORT BRACKET
- D ALUMINIUM SUPPORT ANGLE
- E HYDRAULIC LIME POINTING - RECESSED JOINTS TYPICAL, OTHER OPTIONS AVAILABLE

BO INDICATIVE FINISHES NOT BY TELLING Eg :

- JOINT SEALANTS/ BACKING ROD
- COMPRIBAND JOINT BACKING
- SOLID PACKERS / ISOLATION PADS
- SUBSTRATE FIXINGS
- INSULATION
- BREATHER MEMBRANE
- CEMENT PARTICLE / LINING BOARD
- STEEL FRAMING SYSTEM
- INTERNAL FINISHES
- GLAZING SYSTEMS AND SEALS
- CLOSURE TRIMS / FLASHINGS


* BRICK SLIPS CUT FROM REAL BRICK HAVE MINIMUM THICKNESS OF 25MM. EXTRUDED BRICK SLIPS HAVE A MINIMUM THICKNESS OF 15MM

Rev.	Date	By	Comments
Drawing Status :			

FOR INFORMATION

Material :

NORSKREEN® M4
F SERIES - WITH BRICK
SLIPS SUPPORT BRACKETS
TO CONCRETE

 **Telling Architectural**

Telling Architectural Ltd
Unit 4E
Station Road
Four Ashes
Wolverhampton
WV10 7DB

Tel : 01902 797 700
Fax : 01902 797 720


© Telling Architectural Ltd
Do not scale from this drawing. If in doubt ask

Drawing Title :

**EXTERNAL CORNER DETAIL /
TOP RESTRAINTS**

Scale :	Checked : RAC	Drawn : EJR
1 : 5	Date : 17/01/20	Date : 17/01/20
Size	Drawing No.	Rev.
A3	NOR-M4F-D07	

NOTE:
THESE STANDARD DETAILS DO NOT
INCORPORATE FIRE BARRIER
REQUIREMENTS AROUND WINDOW
OPENINGS AND FLOOR SLABS.
THESE INTERFACING
REQUIREMENTS MUST BE
REVIEWED WITH THE LOCAL FIRE
INSPECTOR BEFORE FINALISATION
OF DETAILS.

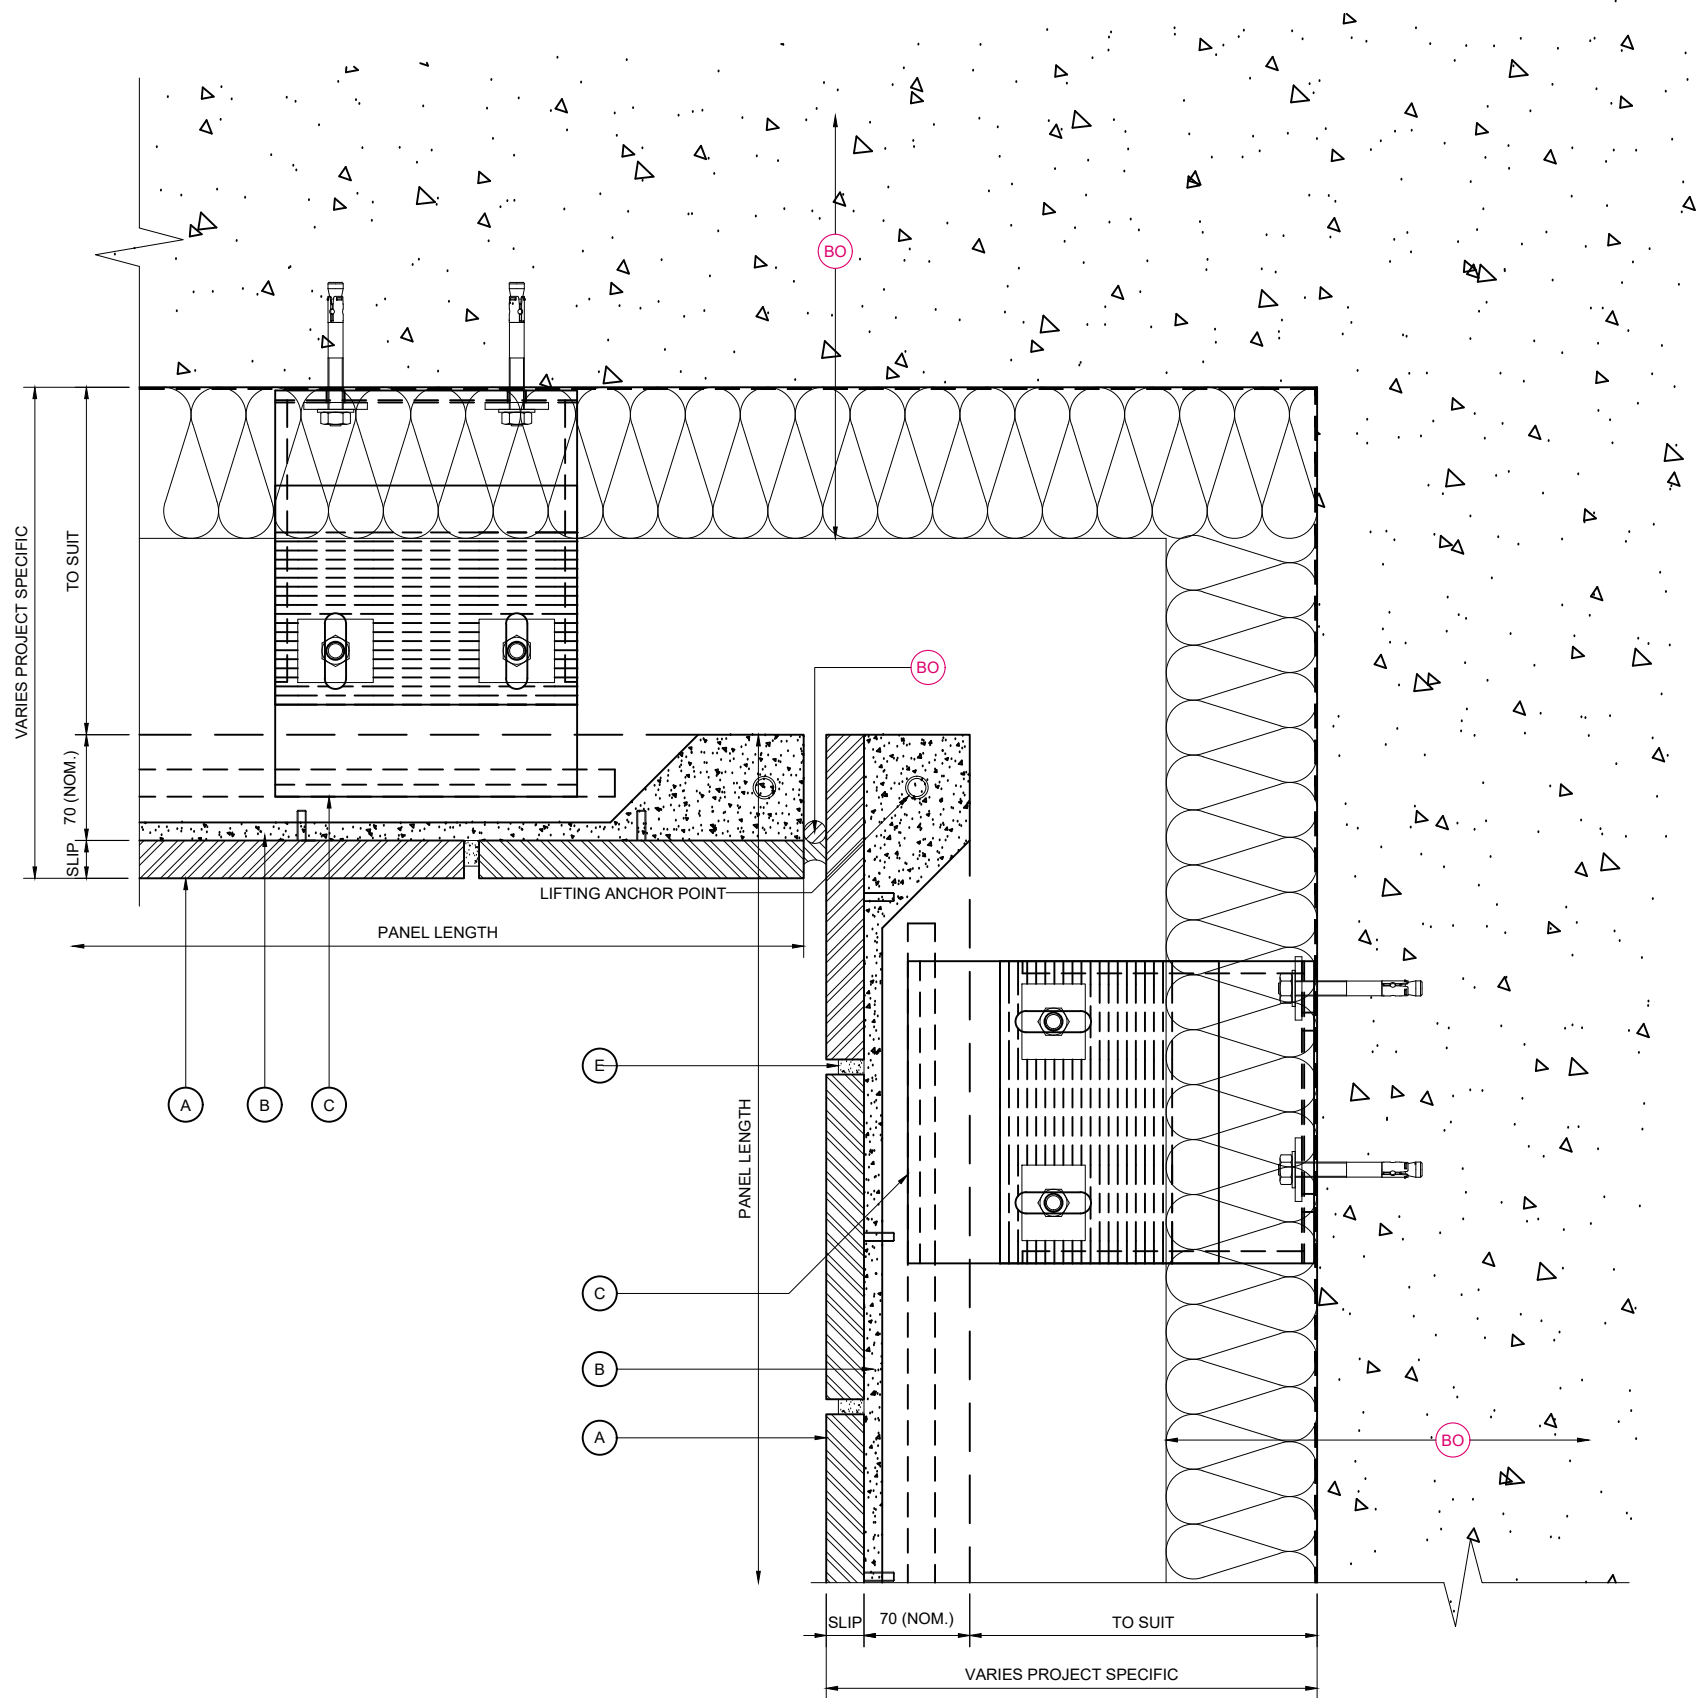

INTERNAL CORNER DETAIL

KEY COMPONENT LEGEND

- (A) BRICK SLIP*
- (B) NORSKREEN® M4 SYSTEM
- (C) STAINLESS STEEL SUPPORT BRACKET
- (D) ALUMINIUM SUPPORT ANGLE
- (E) HYDRAULIC LIME POINTING - RECESSED JOINTS TYPICAL, OTHER OPTIONS AVAILABLE

(BO) INDICATIVE FINISHES NOT BY TELLING Eg :

- JOINT SEALANTS/ BACKING ROD
- COMPRIBAND JOINT BACKING
- SOLID PACKERS / ISOLATION PADS
- SUBSTRATE FIXINGS
- INSULATION
- BREATHER MEMBRANE
- CEMENT PARTICLE / LINING BOARD
- STEEL FRAMING SYSTEM
- INTERNAL FINISHES
- GLAZING SYSTEMS AND SEALS
- CLOSURE TRIMS / FLASHINGS

* BRICK SLIPS CUT FROM REAL BRICK HAVE MINIMUM THICKNESS OF 25MM. EXTRUDED BRICK SLIPS HAVE A MINIMUM THICKNESS OF 15MM

Rev.	Date	By	Comments
------	------	----	----------

Drawing Status :

FOR INFORMATION

Material :

NORSKREEN® M4
F SERIES - WITH BRICK
SLIPS SUPPORT BRACKETS
TO CONCRETE



Telling Architectural Ltd
Unit 4E
Station Road
Four Ashes
Wolverhampton
WV10 7DB

Tel : 01902 797 700
Fax : 01902 797 720

© Telling Architectural Ltd
Do not scale from this drawing. If in doubt ask


Drawing Title :

INTERNAL CORNER DETAIL /
BASE BRACKETS

Scale :	Checked : RAC	Drawn : EJR
1 : 5	Date : 17/01/20	Date : 17/01/20

Size	Drawing No.	Rev.
A3	NOR-M4F-D08	

NOTE:
THESE STANDARD DETAILS DO NOT
INCORPORATE FIRE BARRIER
REQUIREMENTS AROUND WINDOW
OPENINGS AND FLOOR SLABS.
THESE INTERFACING
REQUIREMENTS MUST BE
REVIEWED WITH THE LOCAL FIRE
INSPECTOR BEFORE FINALISATION
OF DETAILS.

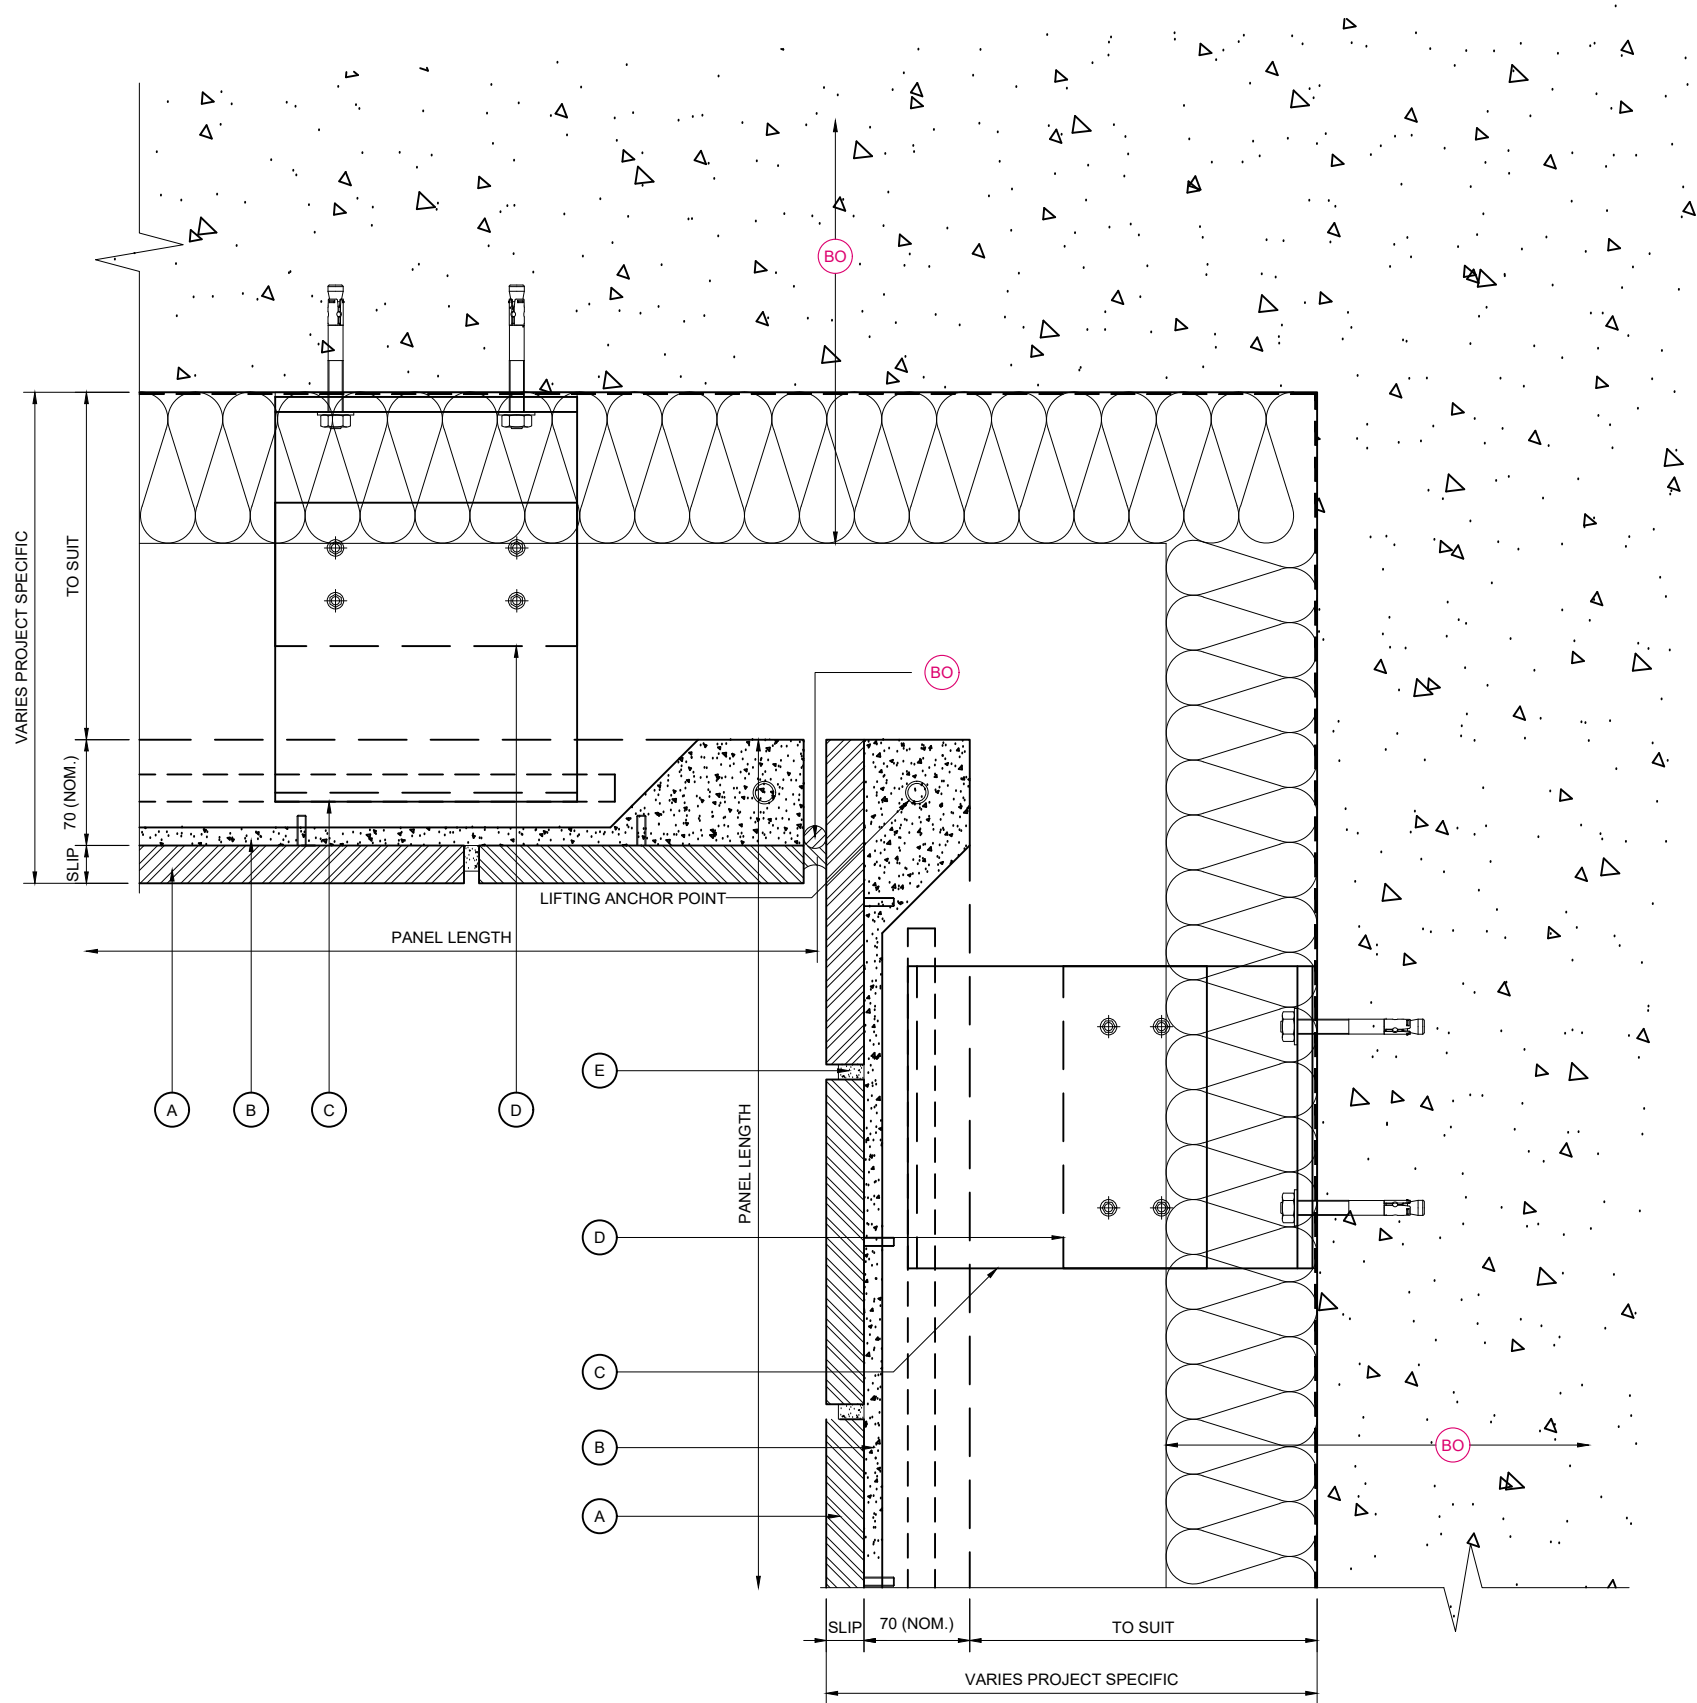

INTERNAL CORNER DETAIL

KEY COMPONENT LEGEND

- A BRICK SLIP*
- B NORSKREEN® M4 SYSTEM
- C STAINLESS STEEL SUPPORT BRACKET
- D ALUMINIUM SUPPORT ANGLE
- E HYDRAULIC LIME POINTING - RECESSED JOINTS TYPICAL, OTHER OPTIONS AVAILABLE

BO INDICATIVE FINISHES NOT BY TELLING Eg :

- JOINT SEALANTS/ BACKING ROD
- COMPRIBAND JOINT BACKING
- SOLID PACKERS / ISOLATION PADS
- SUBSTRATE FIXINGS
- INSULATION
- BREATHER MEMBRANE
- CEMENT PARTICLE / LINING BOARD
- STEEL FRAMING SYSTEM
- INTERNAL FINISHES
- GLAZING SYSTEMS AND SEALS
- CLOSURE TRIMS / FLASHINGS

* BRICK SLIPS CUT FROM REAL BRICK HAVE MINIMUM THICKNESS OF 25MM. EXTRUDED BRICK SLIPS HAVE A MINIMUM THICKNESS OF 15MM

Rev. Date By Comments

Drawing Status :

FOR INFORMATION

Material :

NORSKREEN® M4
F SERIES - WITH BRICK
SLIPS SUPPORT BRACKETS
TO CONCRETE



Telling Architectural Ltd
Unit 4E
Station Road
Four Ashes
Wolverhampton
WV10 7DB
Tel : 01902 797 700
Fax : 01902 797 720


© Telling Architectural Ltd
Do not scale from this drawing. If in doubt ask

Drawing Title :

INTERNAL CORNER DETAIL /
TOP RESTRAINTS

Scale : 1 : 5
Checked : RAC
Date : 17/01/20
Drawn : EJR
Date : 17/01/20

Size Drawing No. Rev.
A3 NOR-M4F-D09

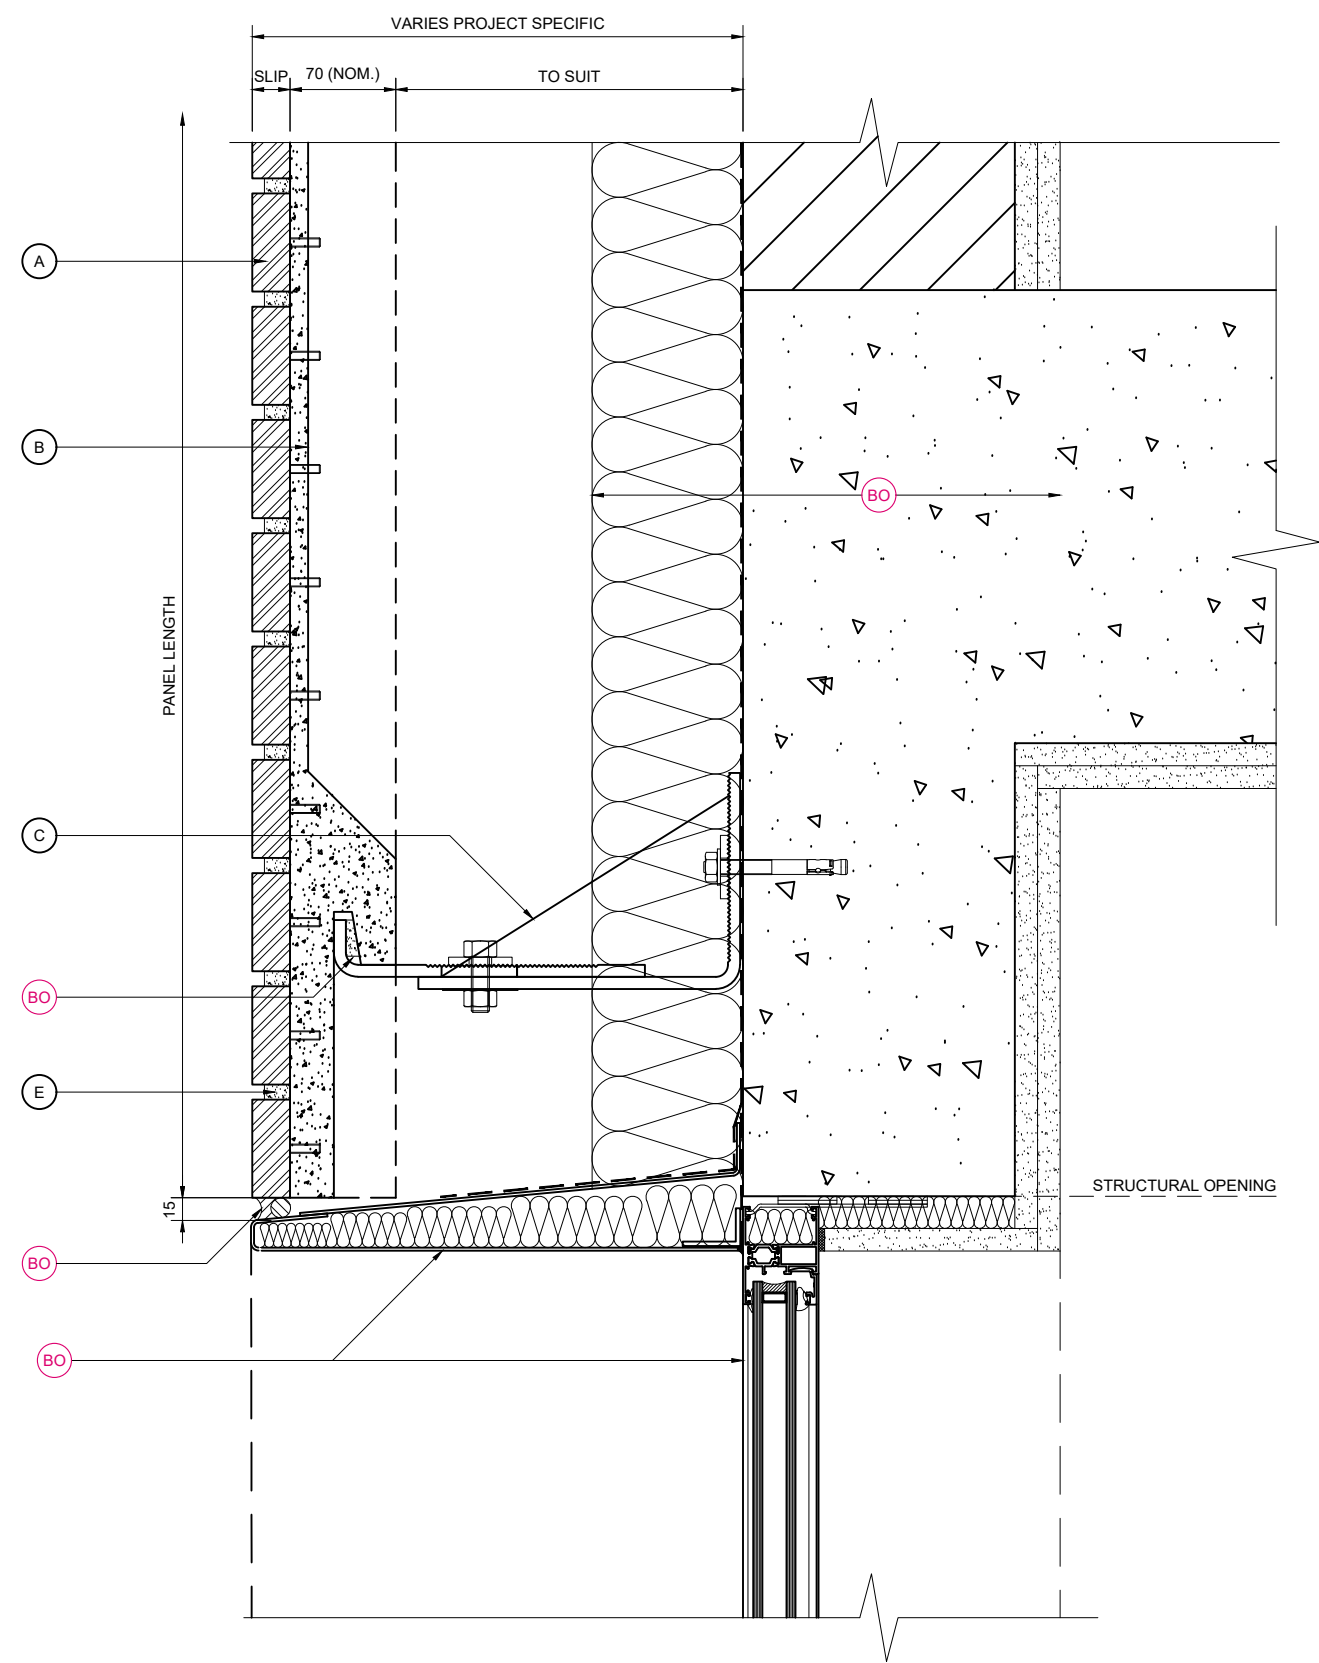

KEY COMPONENT LEGEND

A

BRICK SLIP*

B

NORSKREEN® M4 SYSTEM

C

STAINLESS STEEL SUPPORT BRACKET

D

ALUMINIUM SUPPORT ANGLE

E

HYDRAULIC LIME POINTING - RECESSED JOINTS TYPICAL, OTHER OPTIONS AVAILABLE

BO

INDICATIVE FINISHES NOT BY TELLING Eg :

JOINT SEALANTS/ BACKING ROD

COMPRIBAND JOINT BACKING

SOLID PACKERS / ISOLATION PADS

SUBSTRATE FIXINGS

INSULATION

BREATHER MEMBRANE

CEMENT PARTICLE / LINING BOARD

STEEL FRAMING SYSTEM

INTERNAL FINISHES

GLAZING SYSTEMS AND SEALS

CLOSURE TRIMS / FLASHINGS

* BRICK SLIPS CUT FROM REAL BRICK HAVE MINIMUM THICKNESS OF 25MM. EXTRUDED BRICK SLIPS HAVE A MINIMUM THICKNESS OF 15MM

Telling Architectural

Telling Architectural Ltd
Unit 4E
Station Road
Four Ashes
Wolverhampton
WV10 7DB

Tel : 01902 797 700
Fax : 01902 797 720

© Telling Architectural Ltd
Do not scale from this drawing. If in doubt ask

Drawing Title :


WINDOW HEAD DETAIL WITH FLASHING

NOTE:
THESE STANDARD DETAILS DO NOT
INCORPORATE FIRE BARRIER
REQUIREMENTS AROUND WINDOW
OPENINGS AND FLOOR SLABS.
THESE INTERFACING
REQUIREMENTS MUST BE
REVIEWED WITH THE LOCAL FIRE
INSPECTOR BEFORE FINALISATION
OF DETAILS.

WINDOW HEAD DETAIL

SEE NOR-M4F-D17 FOR PANEL RETURN OPTION

NOTE:
THESE STANDARD DETAILS DO NOT
INCORPORATE FIRE BARRIER
REQUIREMENTS AROUND WINDOW
OPENINGS AND FLOOR SLABS.
THESE INTERFACING
REQUIREMENTS MUST BE
REVIEWED WITH THE LOCAL FIRE
INSPECTOR BEFORE FINALISATION
OF DETAILS.

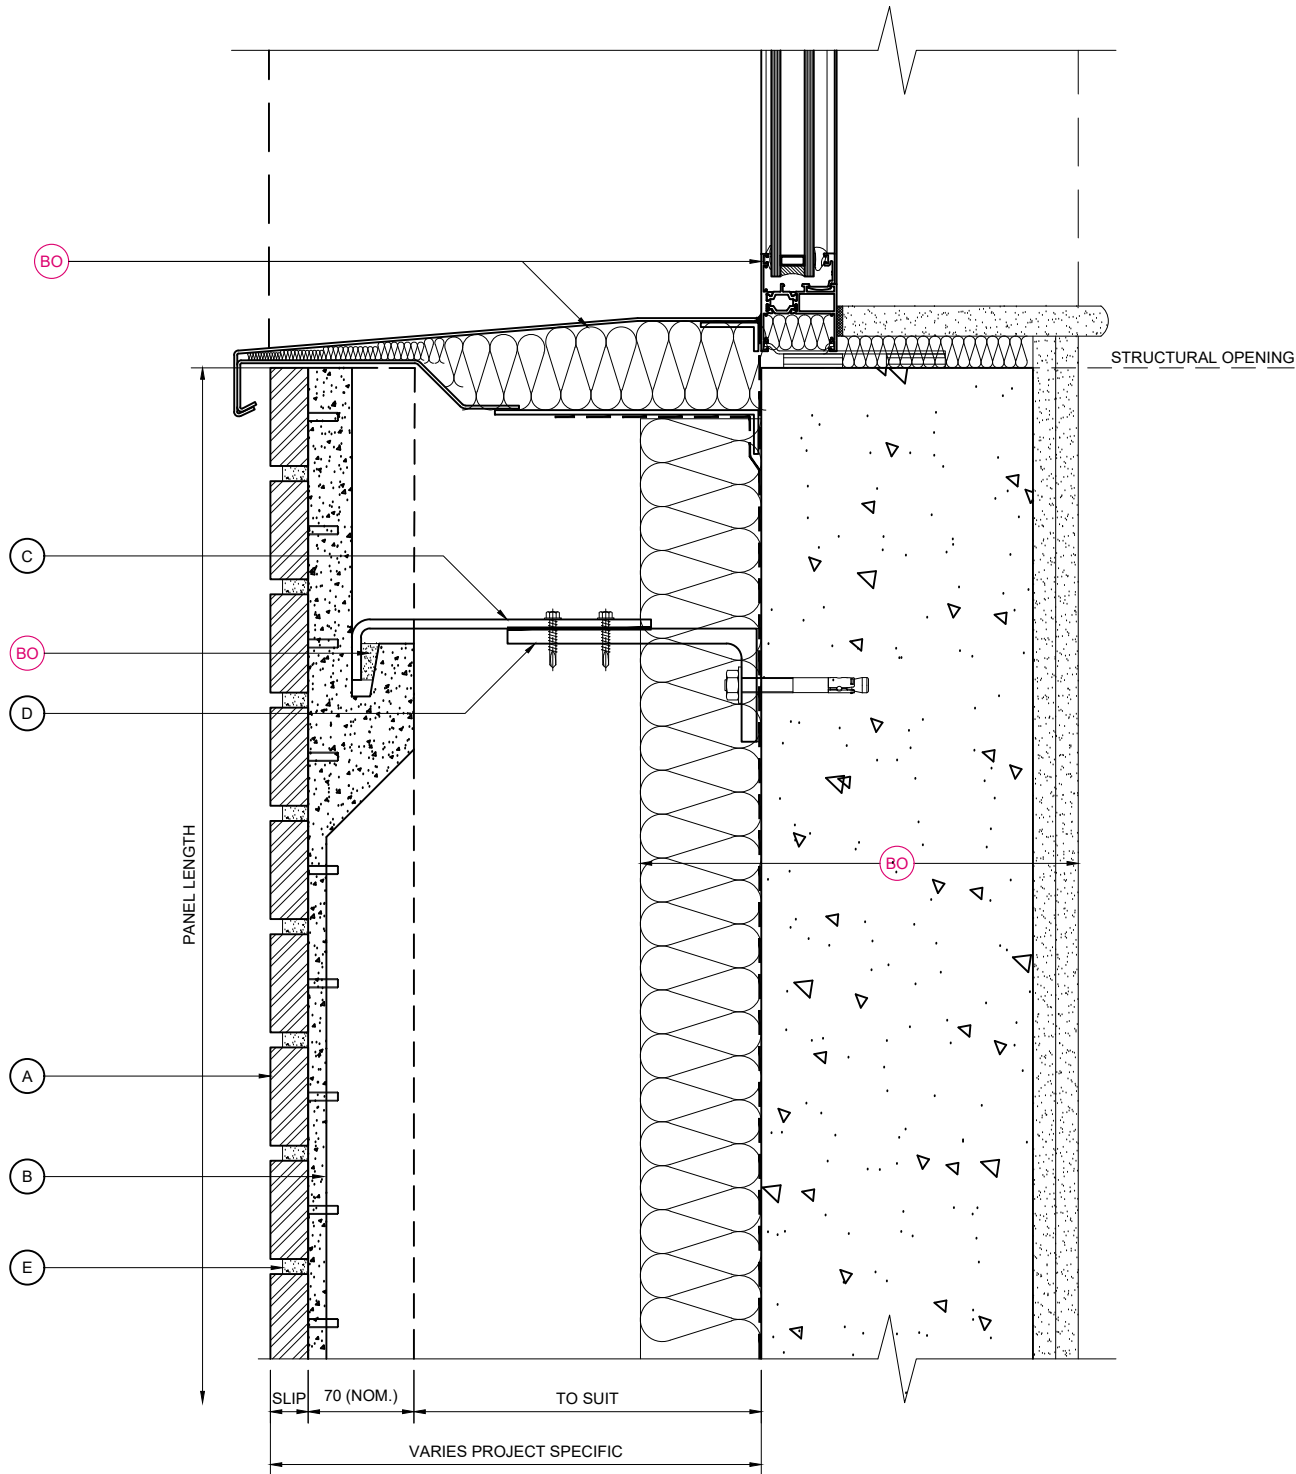

WINDOW CILL DETAIL

KEY COMPONENT LEGEND

- (A) BRICK SLIP*
 - (B) NORSKREEN® M4 SYSTEM
 - (C) STAINLESS STEEL SUPPORT BRACKET
 - (D) ALUMINIUM SUPPORT ANGLE
 - (E) HYDRAULIC LIME POINTING - RECESSED JOINTS TYPICAL, OTHER OPTIONS AVAILABLE
- (BO) INDICATIVE FINISHES NOT BY TELLING Eg :
- JOINT SEALANTS/ BACKING ROD
 - COMPRIBAND JOINT BACKING
 - SOLID PACKERS / ISOLATION PADS
 - SUBSTRATE FIXINGS
 - INSULATION
 - BREATHER MEMBRANE
 - CEMENT PARTICLE / LINING BOARD
 - STEEL FRAMING SYSTEM
 - INTERNAL FINISHES
 - GLAZING SYSTEMS AND SEALS
 - CLOSURE TRIMS / FLASHINGS
- * BRICK SLIPS CUT FROM REAL BRICK HAVE MINIMUM THICKNESS OF 25MM. EXTRUDED BRICK SLIPS HAVE A MINIMUM THICKNESS OF 15MM

Rev.	Date	By	Comments
------	------	----	----------

Drawing Status :

FOR INFORMATION

Material :
NORSKREEN® M4
F SERIES - WITH BRICK
SLIPS SUPPORT BRACKETS
TO CONCRETE

Telling Architectural Ltd
Unit 4E
Station Road
Four Ashes
Wolverhampton
WV10 7DB

Tel : 01902 797 700
Fax : 01902 797 720

© Telling Architectural Ltd
Do not scale from this drawing. If in doubt ask


Drawing Title :

WINDOW CILL DETAIL

Scale :	Checked : RAC	Drawn : EJR
1 : 5	Date : 17/01/20	Date : 17/01/20

Size	Drawing No.	Rev.
A3	NOR-M4F-D11	

NOTE:
THESE STANDARD DETAILS DO NOT
INCORPORATE FIRE BARRIER
REQUIREMENTS AROUND WINDOW
OPENINGS AND FLOOR SLABS.
THESE INTERFACING
REQUIREMENTS MUST BE
REVIEWED WITH THE LOCAL FIRE
INSPECTOR BEFORE FINALISATION
OF DETAILS.

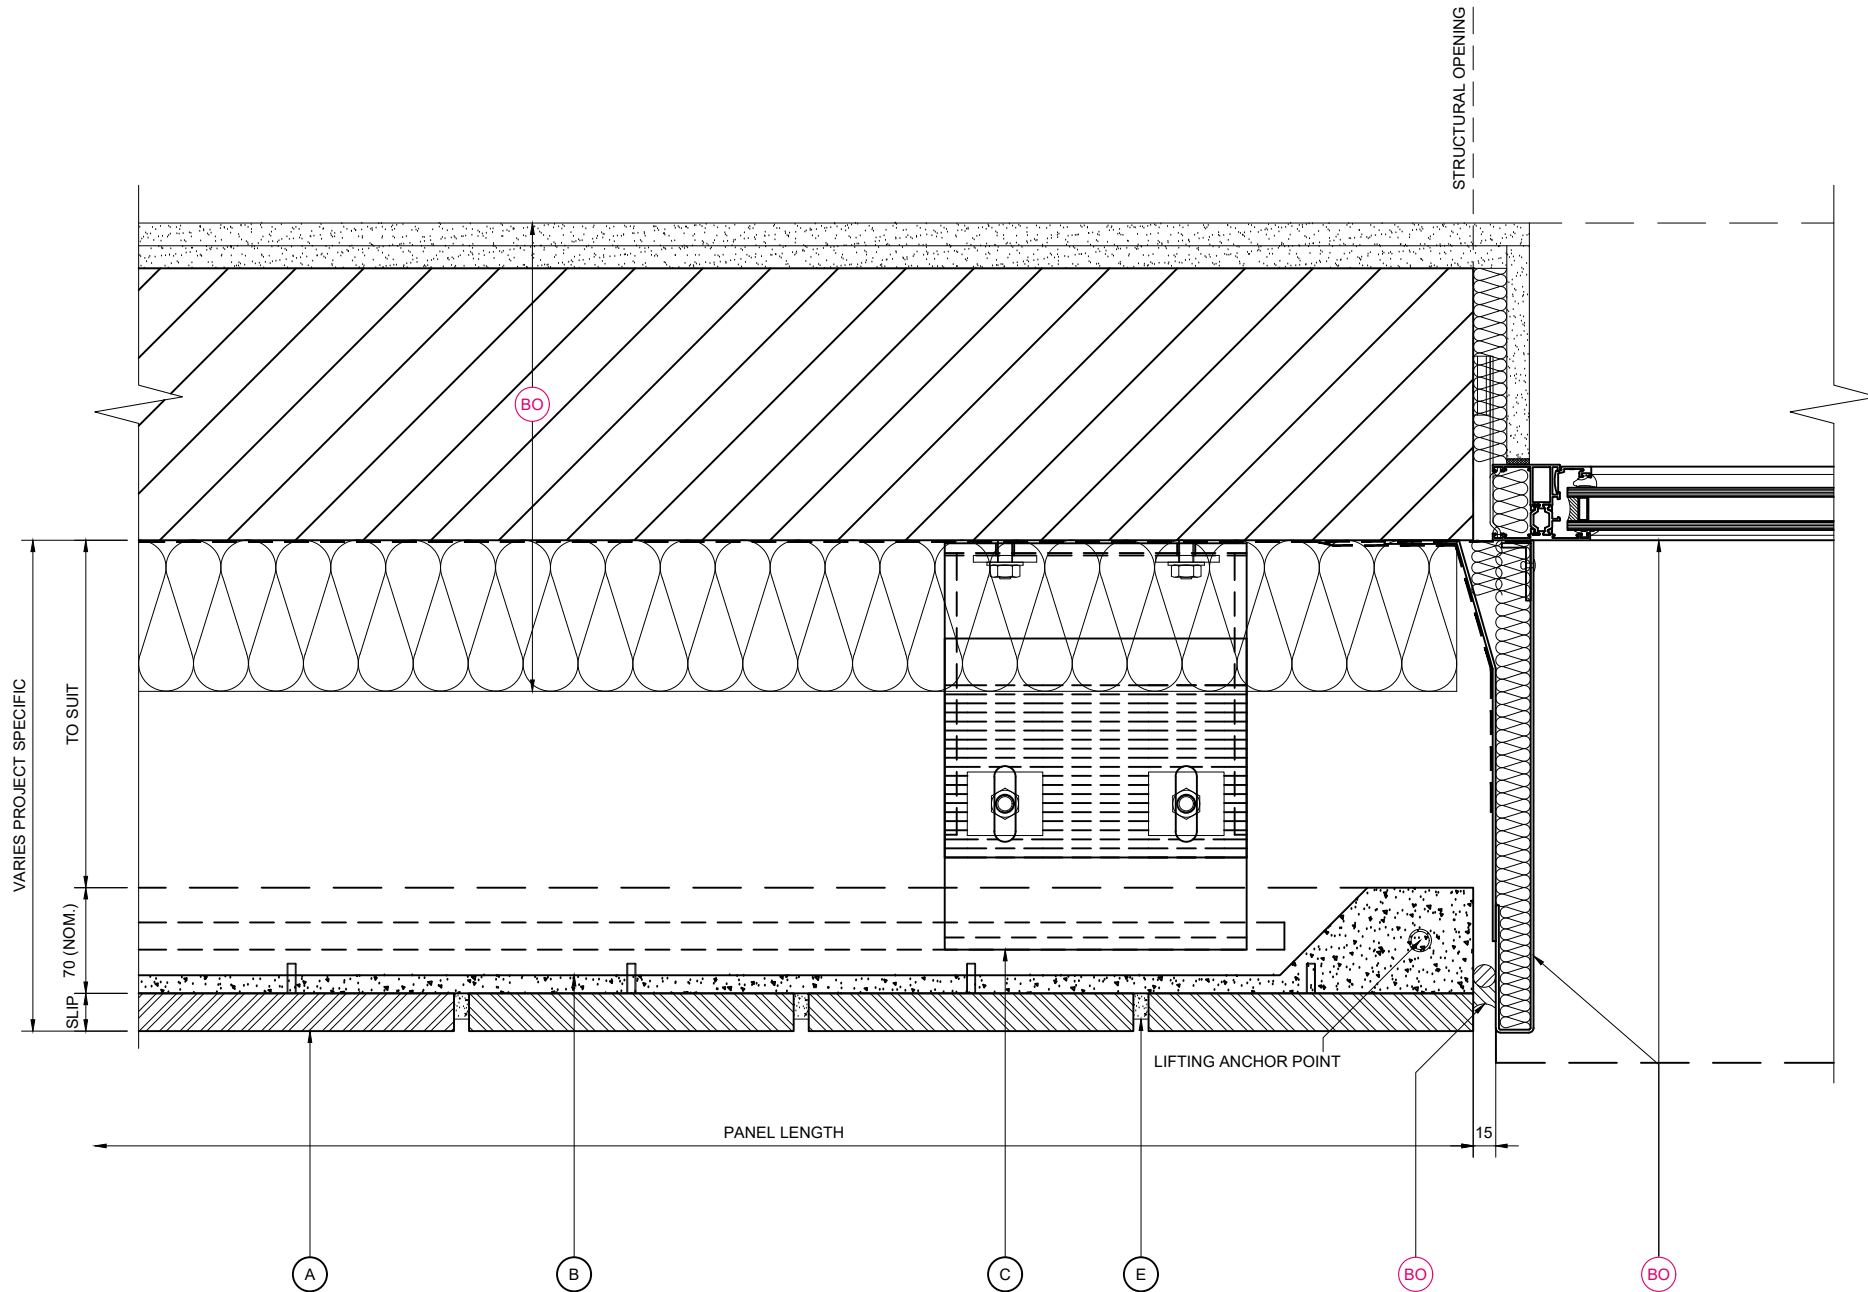

- KEY COMPONENT LEGEND**
- A BRICK SLIP*
 - B NORSKREEN® M4 SYSTEM
 - C STAINLESS STEEL SUPPORT BRACKET
 - D ALUMINIUM SUPPORT ANGLE
 - E HYDRAULIC LIME POINTING - RECESSED JOINTS TYPICAL, OTHER OPTIONS AVAILABLE
- BO INDICATIVE FINISHES NOT BY TELLING Eg :
- JOINT SEALANTS/ BACKING ROD
 - COMPRIBAND JOINT BACKING
 - SOLID PACKERS / ISOLATION PADS
 - SUBSTRATE FIXINGS
 - INSULATION
 - BREATHER MEMBRANE
 - CEMENT PARTICLE / LINING BOARD
 - STEEL FRAMING SYSTEM
 - INTERNAL FINISHES
 - GLAZING SYSTEMS AND SEALS
 - CLOSURE TRIMS / FLASHINGS

* BRICK SLIPS CUT FROM REAL BRICK HAVE MINIMUM THICKNESS OF 25MM. EXTRUDED BRICK SLIPS HAVE A MINIMUM THICKNESS OF 15MM

Rev.	Date	By	Comments
------	------	----	----------

Drawing Status :

FOR INFORMATION

Material :
NORSKREEN® M4
F SERIES - WITH BRICK
SLIPS SUPPORT BRACKETS
TO CONCRETE

 **Telling Architectural**

Telling Architectural Ltd
Unit 4E
Station Road
Four Ashes
Wolverhampton
WV10 7DB

Tel : 01902 797 700
Fax : 01902 797 720

© Telling Architectural Ltd
Do not scale from this drawing. If in doubt ask

Drawing Title :


WINDOW JAMB DETAIL WITH FLASHING

Scale :	Checked : RAC	Drawn : EJR
1 : 5	Date : 17/01/20	Date : 17/01/20
Size	Drawing No.	Rev.
A3	NOR-M4F-D12	

WINDOW JAMB DETAIL

SEE NOR-M4F-D18 FOR RETURN PANEL OPTION

NOTE:
THESE STANDARD DETAILS DO NOT
INCORPORATE FIRE BARRIER
REQUIREMENTS AROUND WINDOW
OPENINGS AND FLOOR SLABS.
THESE INTERFACING
REQUIREMENTS MUST BE
REVIEWED WITH THE LOCAL FIRE
INSPECTOR BEFORE FINALISATION
OF DETAILS.

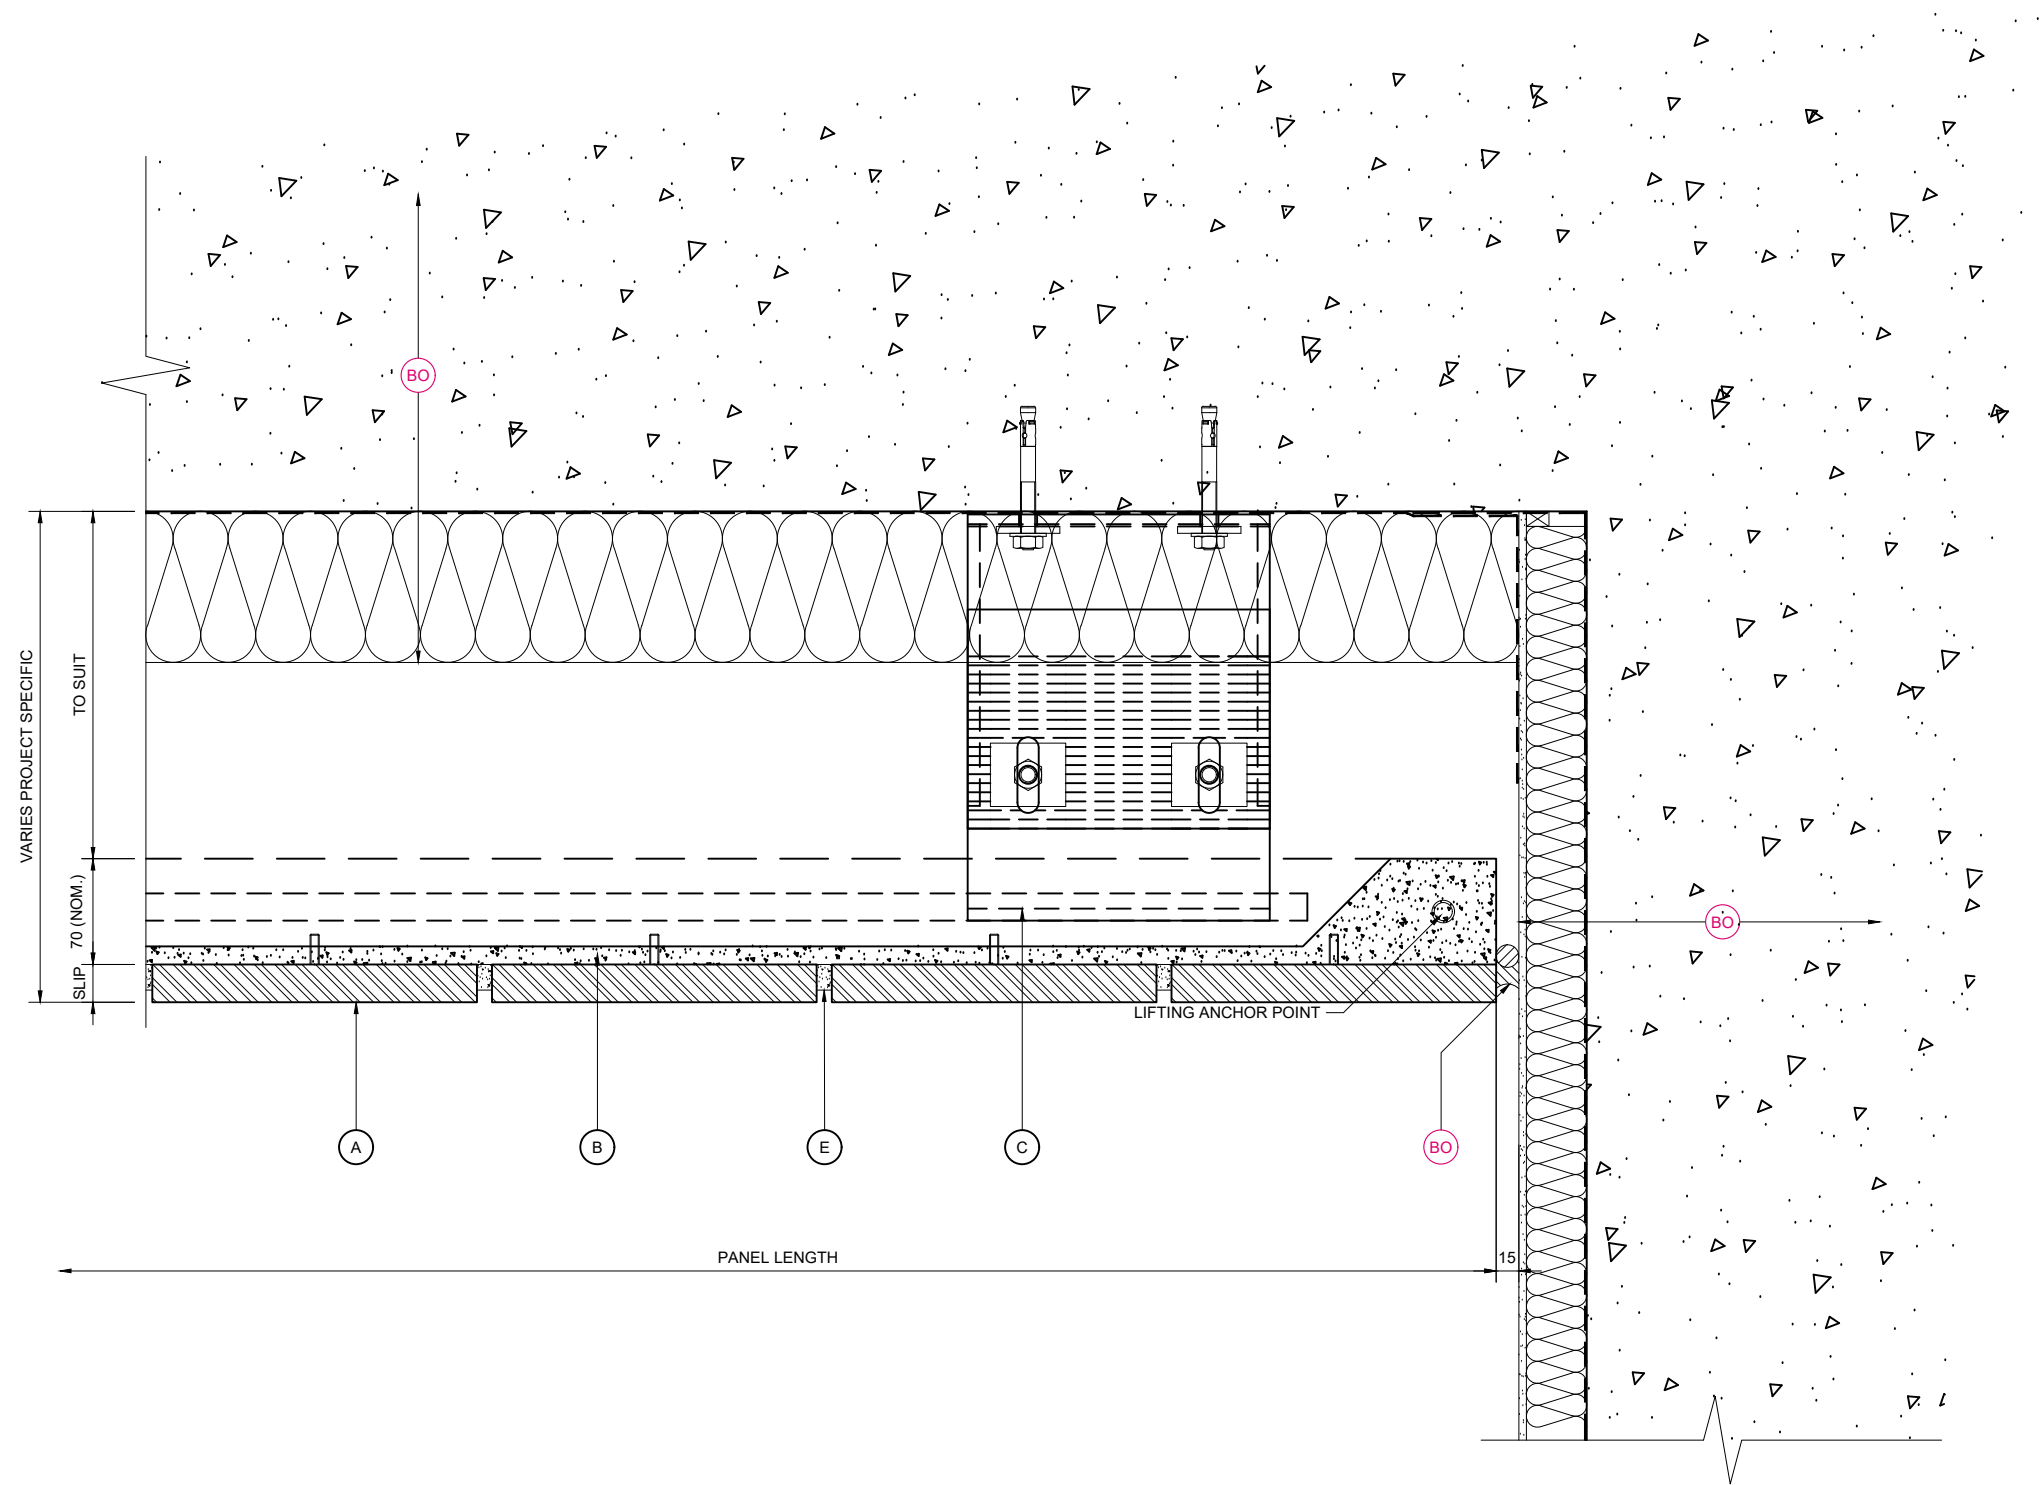

CLADDING ABUTMENT DETAIL

KEY COMPONENT LEGEND

- (A) BRICK SLIP*
- (B) NORSKREEN® M4 SYSTEM
- (C) STAINLESS STEEL SUPPORT BRACKET
- (D) ALUMINIUM SUPPORT ANGLE
- (E) HYDRAULIC LIME POINTING - RECESSED JOINTS TYPICAL, OTHER OPTIONS AVAILABLE

(BO) INDICATIVE FINISHES NOT BY TELLING Eg :

- JOINT SEALANTS/ BACKING ROD
- COMPRIBAND JOINT BACKING
- SOLID PACKERS / ISOLATION PADS
- SUBSTRATE FIXINGS
- INSULATION
- BREATHER MEMBRANE
- CEMENT PARTICLE / LINING BOARD
- STEEL FRAMING SYSTEM
- INTERNAL FINISHES
- GLAZING SYSTEMS AND SEALS
- CLOSURE TRIMS / FLASHINGS

* BRICK SLIPS CUT FROM REAL BRICK HAVE MINIMUM THICKNESS OF 25MM. EXTRUDED BRICK SLIPS HAVE A MINIMUM THICKNESS OF 15MM

Rev. Date By Comments

Drawing Status :

FOR INFORMATION

Material :

NORSKREEN® M4
F SERIES - WITH BRICK
SLIPS SUPPORT BRACKETS
TO CONCRETE



Telling Architectural Ltd
Unit 4E
Station Road
Four Ashes
Wolverhampton
WV10 7DB
Tel : 01902 797 700
Fax : 01902 797 720

© Telling Architectural Ltd
Do not scale from this drawing. If in doubt ask


Drawing Title :

CLADDING ABUTMENT
INTERNAL CORNER DETAIL /
BASE BRACKETS

Scale : 1 : 5
Checked : RAC
Date : 17/01/20
Drawn : EJR
Date : 17/01/20

Size Drawing No. Rev.
A3 NOR-M4F-D13

NOTE:
THESE STANDARD DETAILS DO NOT
INCORPORATE FIRE BARRIER
REQUIREMENTS AROUND WINDOW
OPENINGS AND FLOOR SLABS.
THESE INTERFACING
REQUIREMENTS MUST BE
REVIEWED WITH THE LOCAL FIRE
INSPECTOR BEFORE FINALISATION
OF DETAILS.

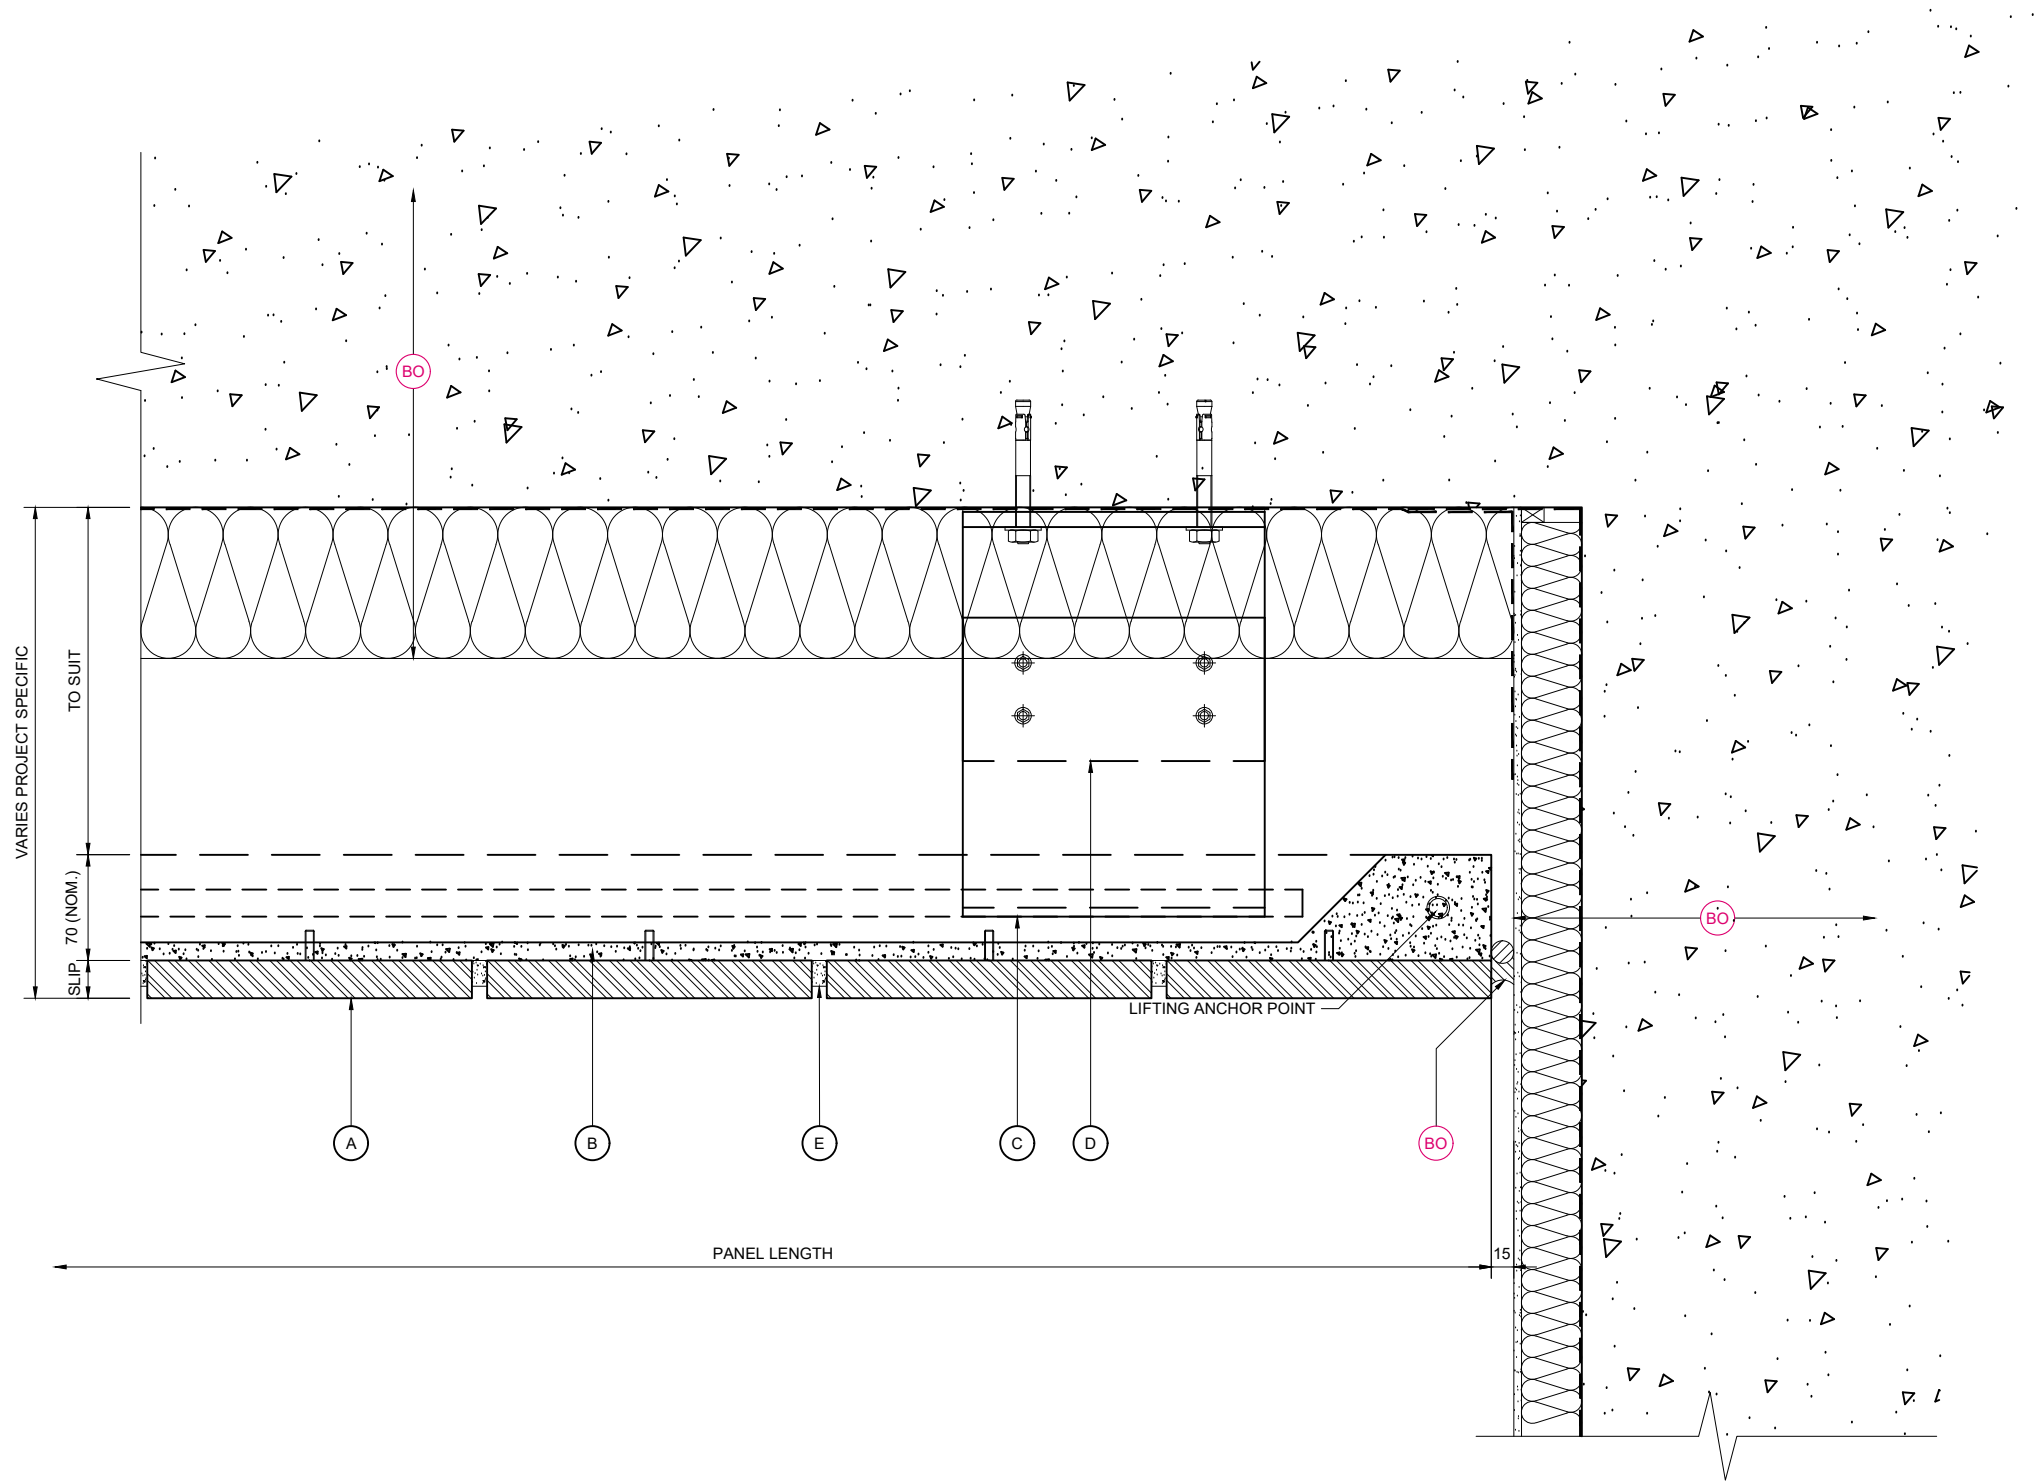

CLADDING ABUTMENT DETAIL

KEY COMPONENT LEGEND

- A BRICK SLIP*
- B NORSKREEN® M4 SYSTEM
- C STAINLESS STEEL SUPPORT BRACKET
- D ALUMINIUM SUPPORT ANGLE
- E HYDRAULIC LIME POINTING - RECESSED JOINTS TYPICAL, OTHER OPTIONS AVAILABLE

BO INDICATIVE FINISHES NOT BY TELLING Eg :

- JOINT SEALANTS/ BACKING ROD
- COMPRIBAND JOINT BACKING
- SOLID PACKERS / ISOLATION PADS
- SUBSTRATE FIXINGS
- INSULATION
- BREATHER MEMBRANE
- CEMENT PARTICLE / LINING BOARD
- STEEL FRAMING SYSTEM
- INTERNAL FINISHES
- GLAZING SYSTEMS AND SEALS
- CLOSURE TRIMS / FLASHINGS

* BRICK SLIPS CUT FROM REAL BRICK HAVE MINIMUM THICKNESS OF 25MM. EXTRUDED BRICK SLIPS HAVE A MINIMUM THICKNESS OF 15MM

Rev.	Date	By	Comments
------	------	----	----------

Drawing Status :

FOR INFORMATION

Material :

NORSKREEN® M4
F SERIES - WITH BRICK
SLIPS SUPPORT BRACKETS
TO CONCRETE



Telling Architectural Ltd
Unit 4E
Station Road
Four Ashes
Wolverhampton
WV10 7DB
Tel : 01902 797 700
Fax : 01902 797 720


© Telling Architectural Ltd
Do not scale from this drawing. If in doubt ask

Drawing Title :

CLADDING ABUTMENT
INTERNAL CORNER DETAIL /
TOP RESTRAINTS

Scale :	Checked : RAC	Drawn : EJR
1 : 5	Date : 17/01/20	Date : 17/01/20

Size	Drawing No.	Rev.
A3	NOR-M4F-D14	

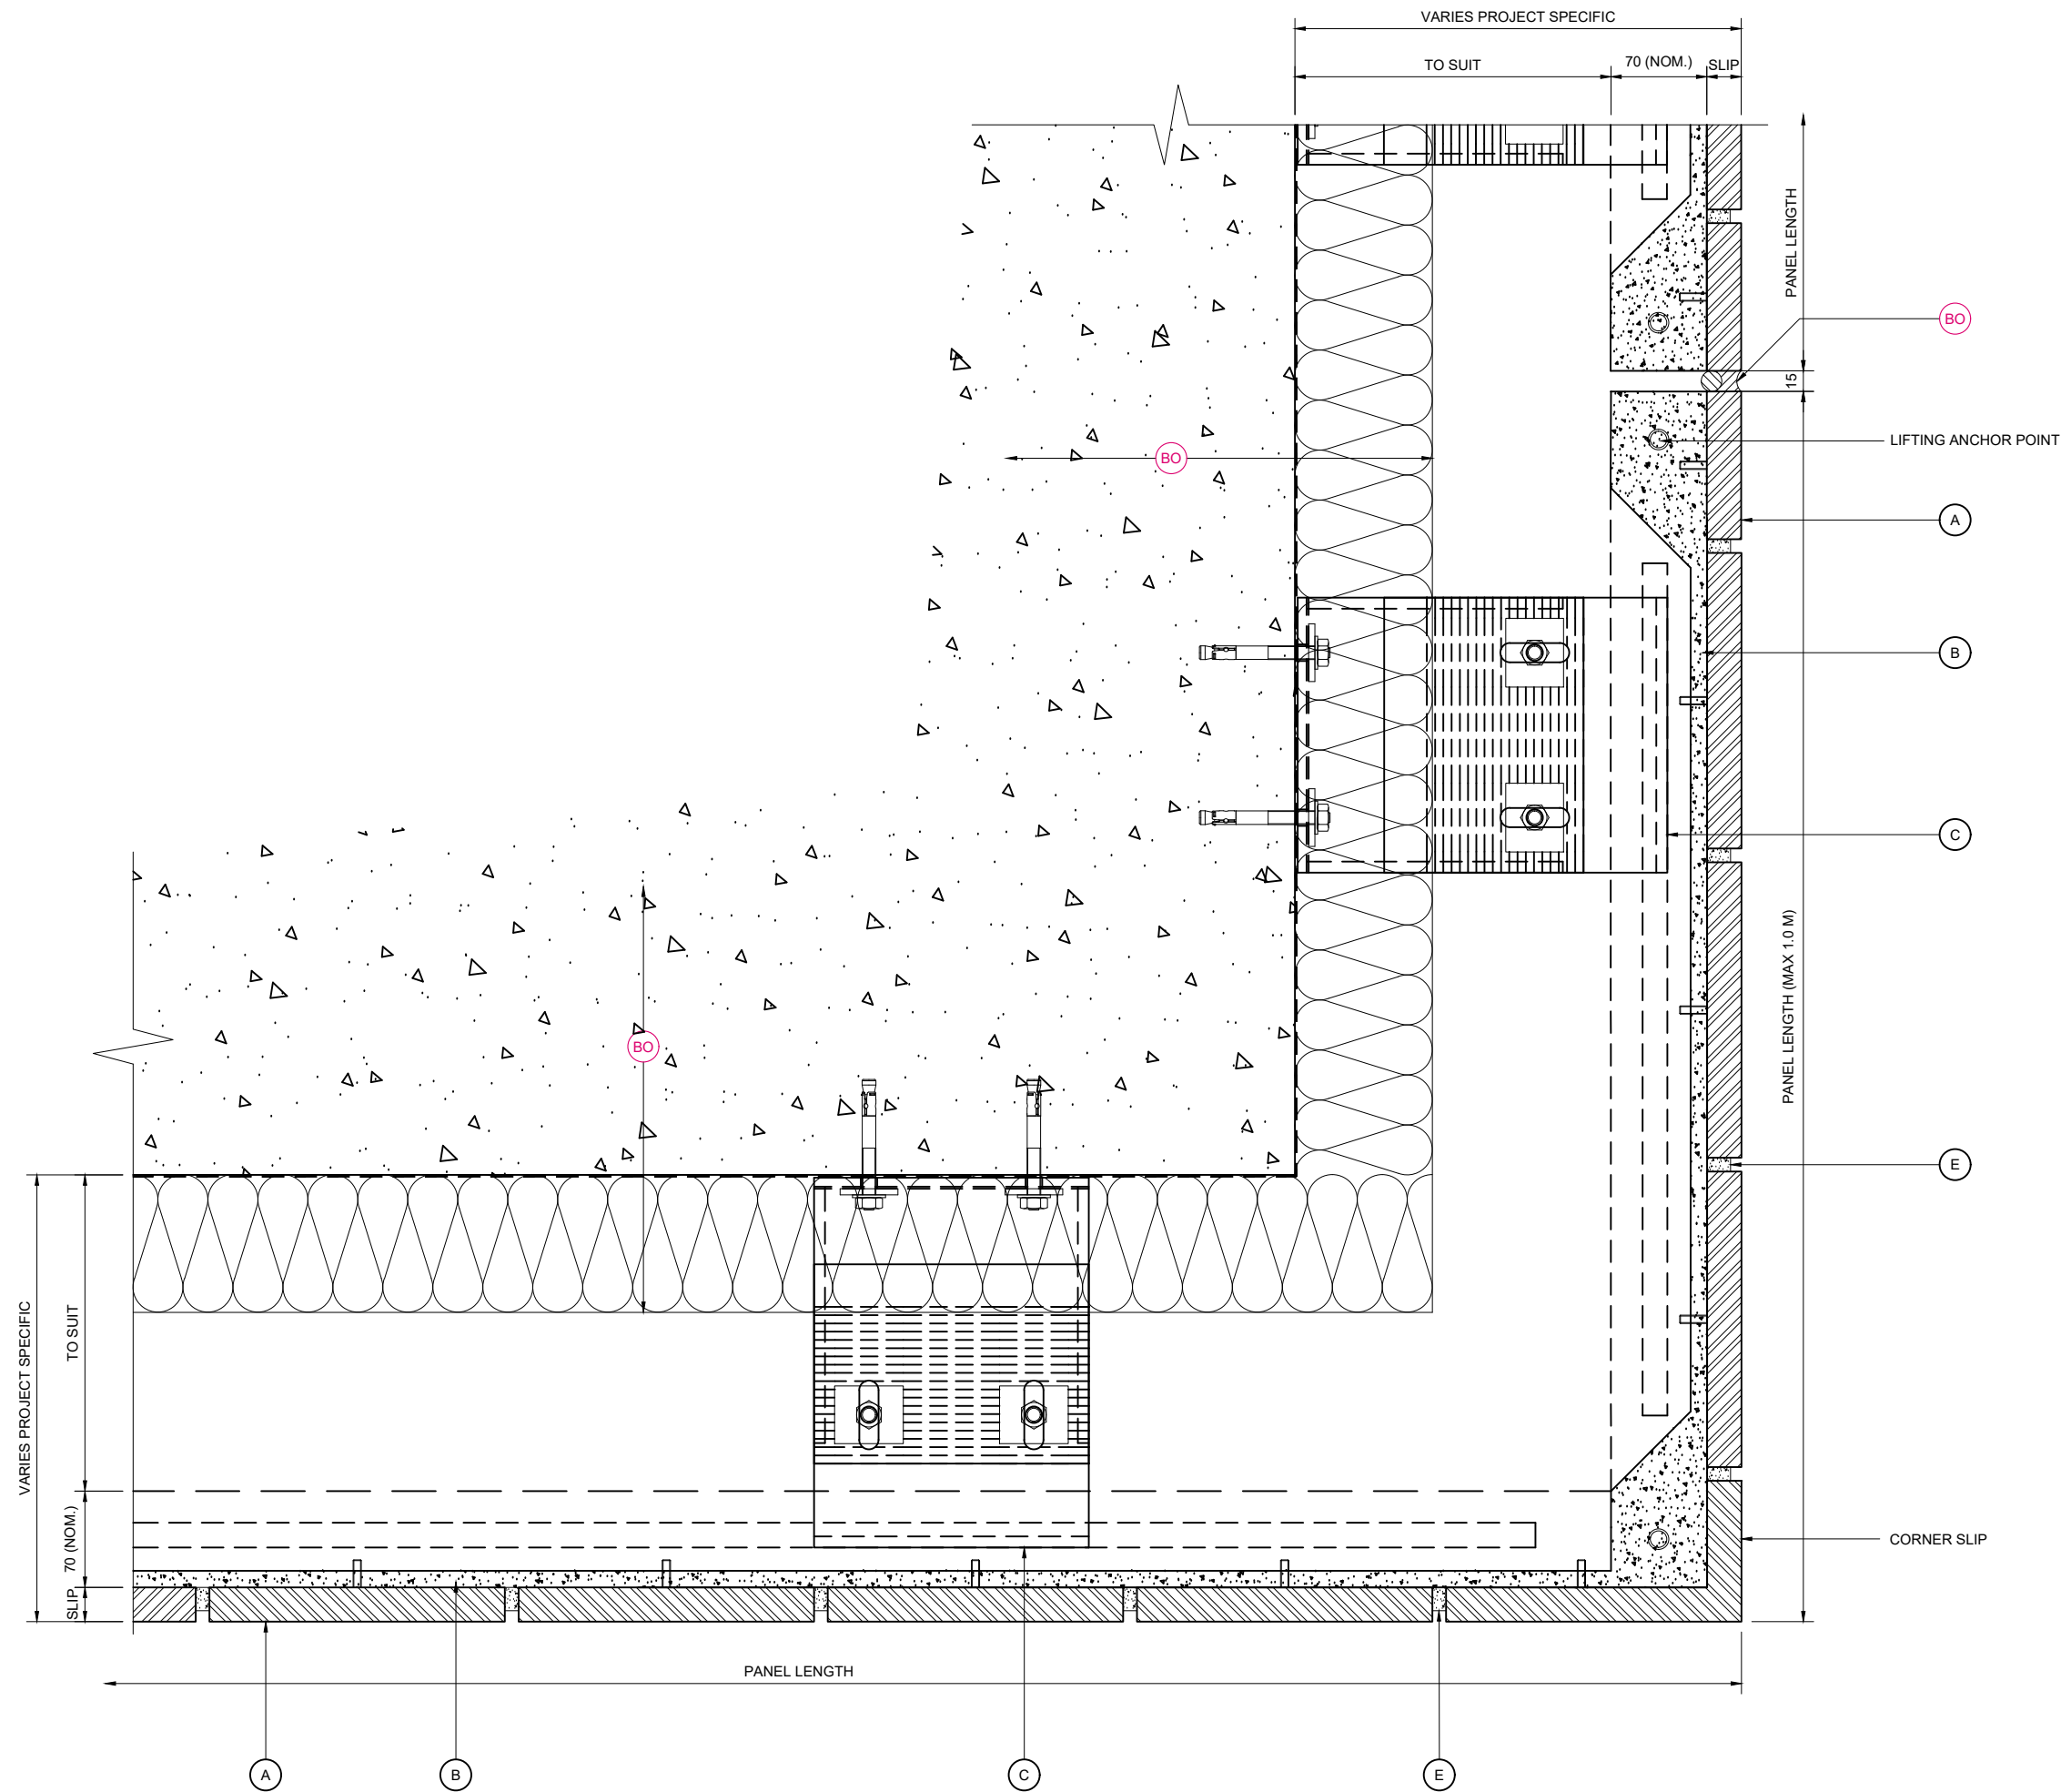

EXTERNAL CORNER PANEL DETAIL

KEY COMPONENT LEGEND

- A BRICK SLIP*
- B NORSKREEN® M4 SYSTEM
- C STAINLESS STEEL SUPPORT BRACKET
- D ALUMINIUM SUPPORT ANGLE
- E HYDRAULIC LIME POINTING - RECESSED JOINTS TYPICAL, OTHER OPTIONS AVAILABLE

BO INDICATIVE FINISHES NOT BY TELLING Eg :

- JOINT SEALANTS/ BACKING ROD
- COMPRIBAND JOINT BACKING
- SOLID PACKERS / ISOLATION PADS
- SUBSTRATE FIXINGS
- INSULATION
- BREATHER MEMBRANE
- CEMENT PARTICLE / LINING BOARD
- STEEL FRAMING SYSTEM
- INTERNAL FINISHES
- GLAZING SYSTEMS AND SEALS
- CLOSURE TRIMS / FLASHINGS

* BRICK SLIPS CUT FROM REAL BRICK HAVE MINIMUM THICKNESS OF 25MM. EXTRUDED BRICK SLIPS HAVE A MINIMUM THICKNESS OF 15MM

Rev.	Date	By	Comments
------	------	----	----------

Drawing Status :

FOR INFORMATION

Material :
NORSKREEN® M4
F SERIES - WITH BRICK
SLIPS SUPPORT BRACKETS
TO CONCRETE

 Telling Architectural

Telling Architectural Ltd
Unit 4E
Station Road
Four Ashes
Wolverhampton
WV10 7DB

Tel : 01902 797 700
Fax : 01902 797 720


© Telling Architectural Ltd
Do not scale from this drawing. If in doubt ask

Drawing Title :

EXTERNAL CORNER PANEL
DETAIL / BASE BRACKETS

Scale :	Checked : RAC	Drawn : EJR
1 : 5	Date : 17/01/20	Date : 17/01/20

Size	Drawing No.	Rev.
A3	NOR-M4F-D15	

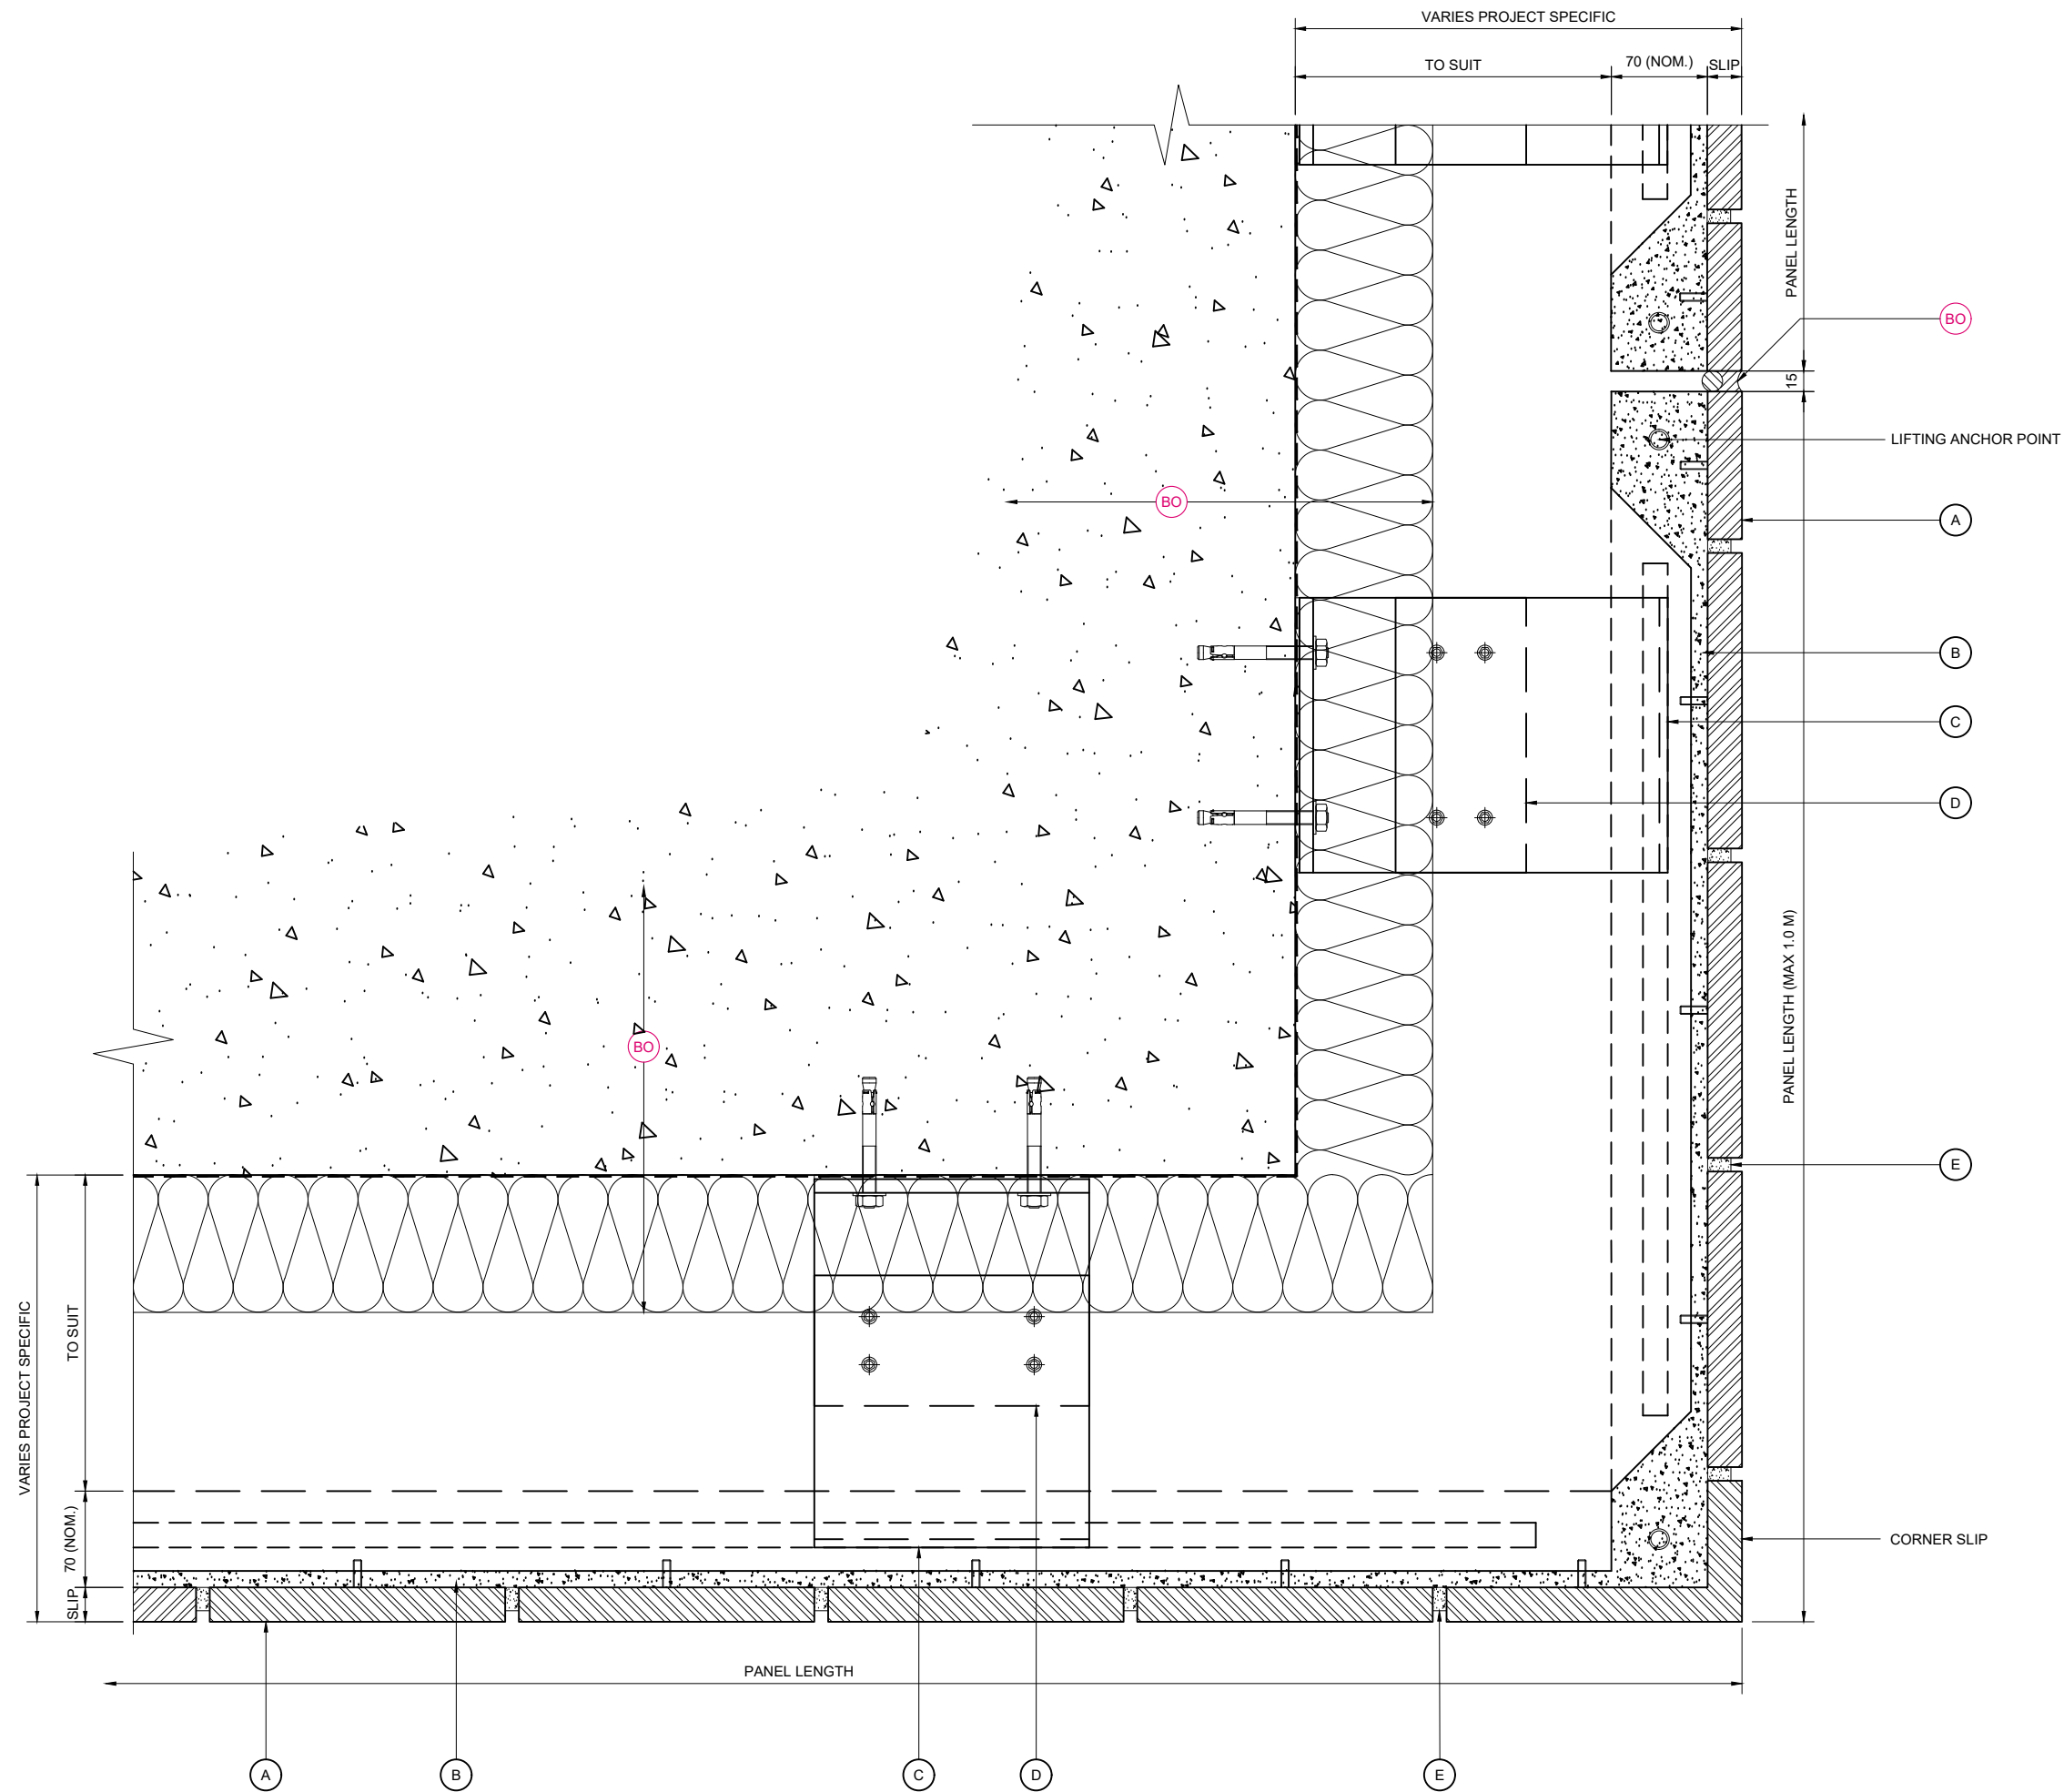

NOTE:
THESE STANDARD DETAILS DO NOT
INCORPORATE FIRE BARRIER
REQUIREMENTS AROUND WINDOW
OPENINGS AND FLOOR SLABS.
THESE INTERFACING
REQUIREMENTS MUST BE
REVIEWED WITH THE LOCAL FIRE
INSPECTOR BEFORE FINALISATION
OF DETAILS.

EXTERNAL CORNER PANEL DETAIL

KEY COMPONENT LEGEND

- A BRICK SLIP*
- B NORSKREEN® M4 SYSTEM
- C STAINLESS STEEL SUPPORT BRACKET
- D ALUMINIUM SUPPORT ANGLE
- E HYDRAULIC LIME POINTING - RECESSED JOINTS TYPICAL, OTHER OPTIONS AVAILABLE

BO INDICATIVE FINISHES NOT BY TELLING Eg :

- JOINT SEALANTS/ BACKING ROD
- COMPRIBAND JOINT BACKING
- SOLID PACKERS / ISOLATION PADS
- SUBSTRATE FIXINGS
- INSULATION
- BREATHER MEMBRANE
- CEMENT PARTICLE / LINING BOARD
- STEEL FRAMING SYSTEM
- INTERNAL FINISHES
- GLAZING SYSTEMS AND SEALS
- CLOSURE TRIMS / FLASHINGS

* BRICK SLIPS CUT FROM REAL BRICK HAVE MINIMUM THICKNESS OF 25MM. EXTRUDED BRICK SLIPS HAVE A MINIMUM THICKNESS OF 15MM

Rev.	Date	By	Comments
------	------	----	----------

Drawing Status :

FOR INFORMATION

Material :

NORSKREEN® M4
F SERIES - WITH BRICK
SLIPS SUPPORT BRACKETS
TO CONCRETE



Telling Architectural Ltd
Unit 4E
Station Road
Four Ashes
Wolverhampton
WV10 7DB
Tel : 01902 797 700
Fax : 01902 797 720

© Telling Architectural Ltd
Do not scale from this drawing. If in doubt ask


Drawing Title :

EXTERNAL CORNER PANEL
DETAIL / TOP RESTRAINTS

Scale :	Checked : RAC	Drawn : EJR
1 : 5	Date : 17/01/20	Date : 17/01/20

Size	Drawing No.	Rev.
A3	NOR-M4F-D16	

NOTE:
THESE STANDARD DETAILS DO NOT
INCORPORATE FIRE BARRIER
REQUIREMENTS AROUND WINDOW
OPENINGS AND FLOOR SLABS.
THESE INTERFACING
REQUIREMENTS MUST BE
REVIEWED WITH THE LOCAL FIRE
INSPECTOR BEFORE FINALISATION
OF DETAILS.

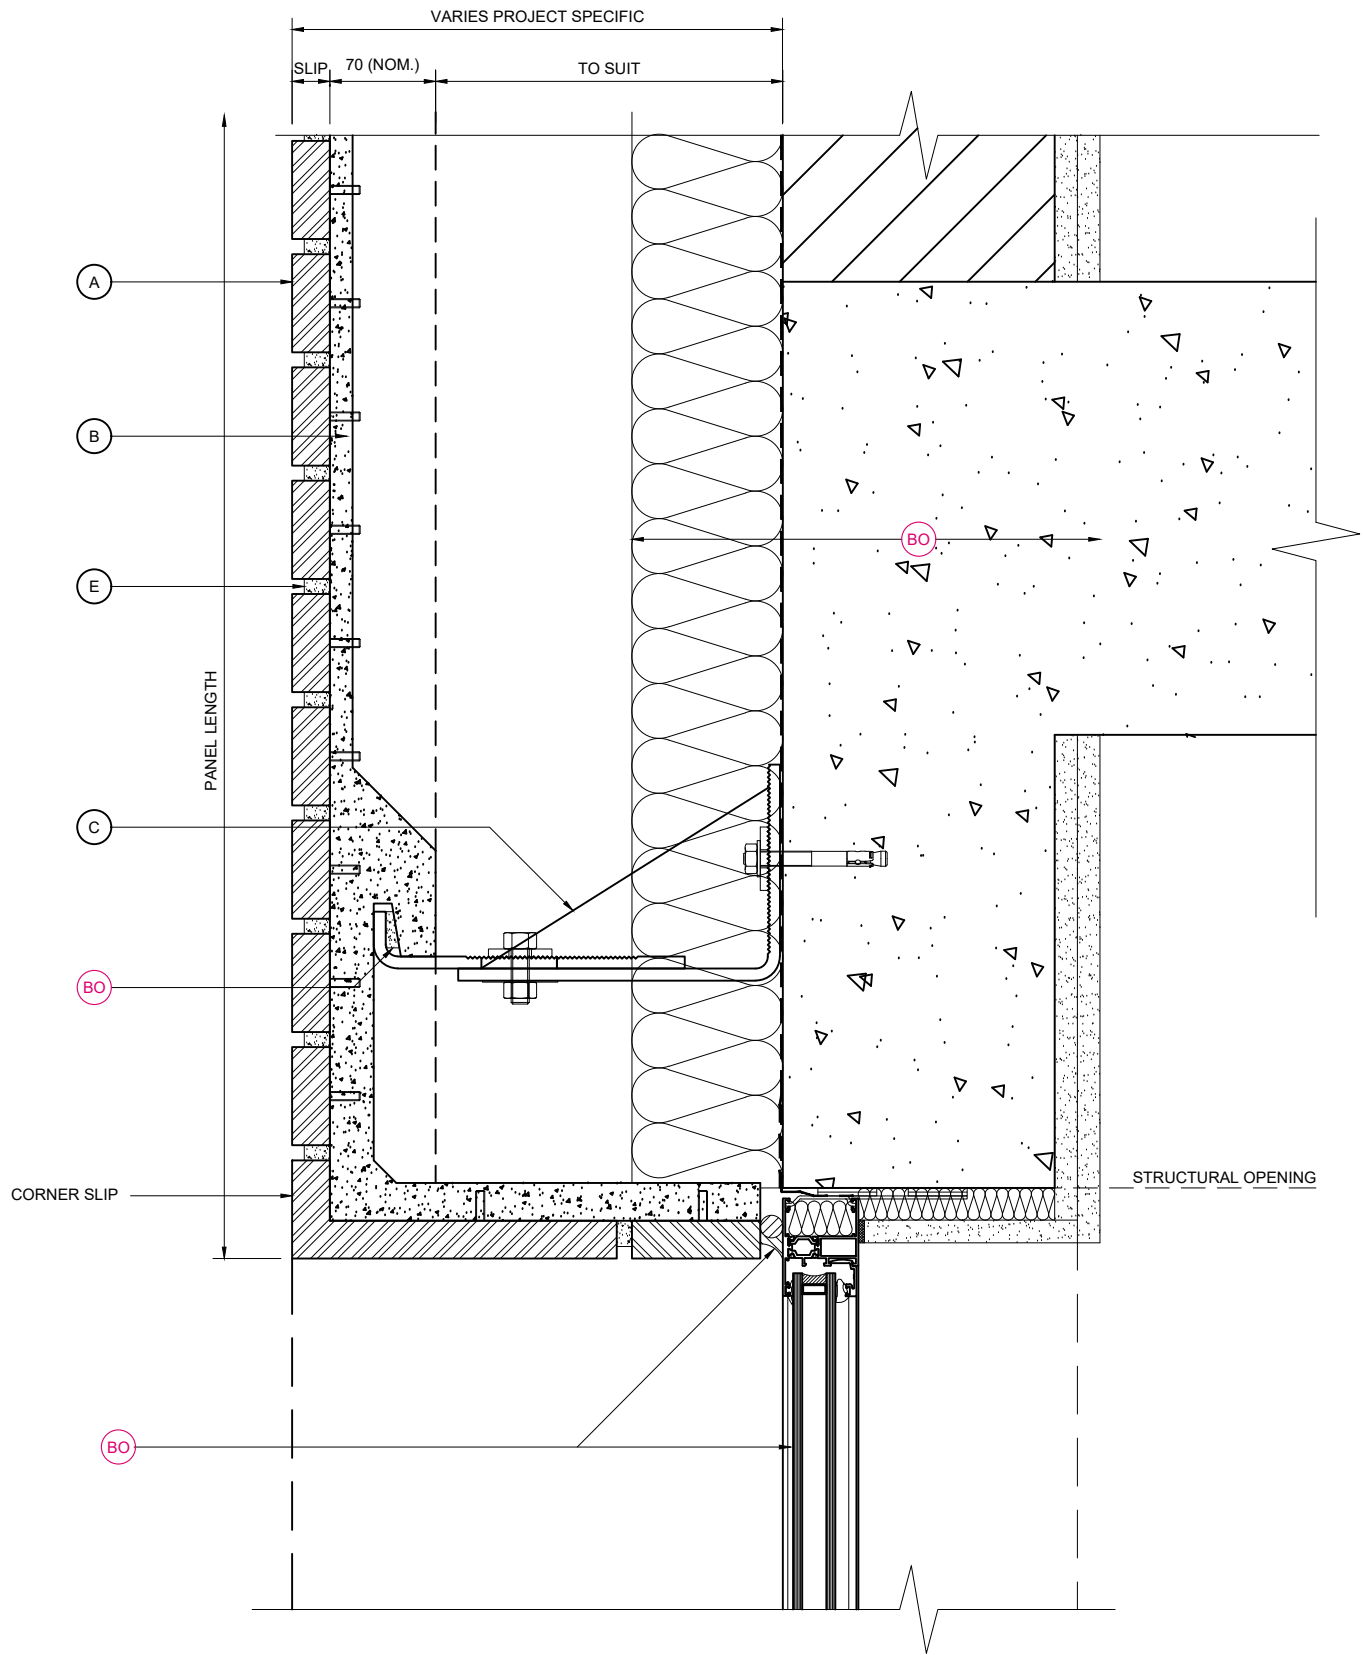

WINDOW HEAD WITH RETURN DETAIL

KEY COMPONENT LEGEND

- A BRICK SLIP*
- B NORSKREEN® M4 SYSTEM
- C STAINLESS STEEL SUPPORT BRACKET
- D ALUMINIUM SUPPORT ANGLE
- E HYDRAULIC LIME POINTING - RECESSED JOINTS TYPICAL, OTHER OPTIONS AVAILABLE

BO INDICATIVE FINISHES NOT BY TELLING Eg :

- JOINT SEALANTS/ BACKING ROD
- COMPRIBAND JOINT BACKING
- SOLID PACKERS / ISOLATION PADS
- SUBSTRATE FIXINGS
- INSULATION
- BREATHER MEMBRANE
- CEMENT PARTICLE / LINING BOARD
- STEEL FRAMING SYSTEM
- INTERNAL FINISHES
- GLAZING SYSTEMS AND SEALS
- CLOSURE TRIMS / FLASHINGS

* BRICK SLIPS CUT FROM REAL BRICK HAVE MINIMUM THICKNESS OF 25MM. EXTRUDED BRICK SLIPS HAVE A MINIMUM THICKNESS OF 15MM

Rev. Date By Comments

Drawing Status :

FOR INFORMATION

Material :

NORSKREEN® M4
F SERIES - WITH BRICK
SLIPS SUPPORT BRACKETS
TO CONCRETE



Telling Architectural Ltd
Unit 4E
Station Road
Four Ashes
Wolverhampton
WV10 7DB
Tel : 01902 797 700
Fax : 01902 797 720

© Telling Architectural Ltd
Do not scale from this drawing. If in doubt ask

Drawing Title :

WINDOW HEAD PANEL
RETURN DETAIL

Scale : 1 : 5
Checked : RAC
Date : 17/01/20
Drawn : EJR
Date : 17/01/20

Size Drawing No. Rev.
A3 NOR-M4F-D17

