


Terminal End Detail (see ST-325-END)

Terminal End Detail (see ST-325-END)

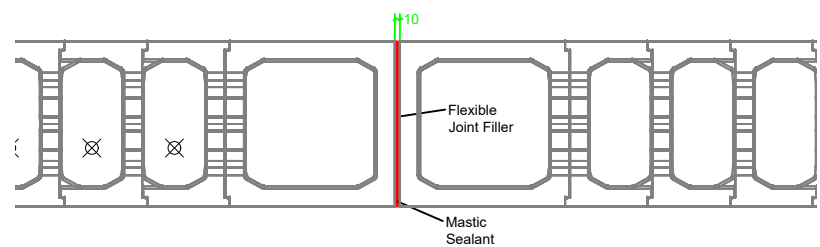

**NOTES:**

Stepoc 325 will accommodate a single or double layer of reinforcement and is laid in half bond. The first course is mortar bedded to ensure it is completely level.

Please ensure all calculations are carried out using the correct values for the position of the reinforcement and in accordance with the relevant design standard.

Corner and End Details should be constructed first and any cut blocks incorporated towards the center of the walling section.

Movement joints should be incorporated at maximum 20m centers using the End Detail to finish and start the wall.

Reinforcement shown at minimum possible centers. Final design may allow for increased centers however these must still be multiples of 162.5mm.

Concrete should be to Structural Engineers specification but no less than C32/40 specification with a slump of no less than 150mm (S4) and a maximum aggregate size of 10mm. Cover to vertical reinforcement should be a minimum of 40mm

Maximum pour height is 10 courses = 2.25m

Concrete infill - 0.19m<sup>3</sup>/m<sup>2</sup>

Project  
325mm Stepoc - Standard Details

Title  
Movement Joint Detail



Units 1 & 2, Cosgrove Business Park  
Soot Hill, Anderton  
Northwich  
Cheshire  
CW9 6AA  
Tel: 0333 234 3434  
www.andertonconcrete.co.uk  
Anderton Concrete Ltd. 2019 ©

Drawing Number  
ST - 325 - MJ

Rev  
C

Drawn By  
TJF

Date  
22.05.2019

Scale  
NTS

Approved By

Date

Drawing is supplied by Anderton Concrete Ltd and must not be reproduced or shown to others without prior written consent.